GGG-A-151d
February 26, 1964

SUPERSEDING
Int. Fed. Spec. GGG-A-00151c (GSA-FSS)
September 17, 1962 and
Fed. Spec. GGG-A-151a
May 28, 1940

FEDERAL SPECIFICATION

ADZ

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers adzes used for hewing, trimming or similar operations in the rough-working of wood, ties, timber, etc.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types.* The adzes covered by this specification shall be of the following types, as specified (see 6.1):

Type I.—Carpenters'.
Type II.—Railroad.
Type III.—Ship carpenters'.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposals, form a part of this specification:

Federal Specification:

NN-H-93—Handles; Hickory, Striking Tool.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151—Metals, Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools, Packaging of.

Military Standards:

MIL-STD-105 — Sampling Procedures

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of adzes otherwise conforming to this specification.

3.2 Material. The material used in the manufacture of the adzes shall be either forged high carbon or forged alloy steel, as specified (see 6.1). The steel shall be free from all imperfections that may affect serviceability.

3.3 Hardness. Each blade shall be hardened and tempered for a distance of not less than 3/4 inch back from the cutting edge. The Rockwell C hardness for high carbon steel blades shall be not less than 39 nor more than 48 and for alloy steel blades shall be not less than 50 nor more than 55. Hardness readings shall be taken 1/2 inch back from the cutting edge.

3.4 Finish. The convex back of the blade, the back of the eye, and the back of the head shall be ground smooth with a grit not coarser than No. 24 abrasive grain. The cutting bevel and the face of the head (or the spur of type III adzes) shall be polished with a grit not coarser than 120 abrasive grain. The polished portions shall be coated with rust-resisting clear lacquer and the balance of the adz shall be coated with an opaque rust-resisting material such as paint or enamel.

3.5 Handles. Unless otherwise specified (see 6.1), adzes shall be furnished with handles. The handles shall be grade A conforming to NN-H-93, properly fitted to the head and disassembled.

3.6 Identification marking. Each adz shall be plainly and permanently marked with the name of the manufacturer or with a trademark of such known character that the source of manufacture may be readily determined.

3.7 Type I, carpenters'. The body shall consist of a head, a rectangular eyehole, and a thin arched blade curved toward and at right angle to the handle. Unless otherwise specified (see 6.1), the adz shall have either a flat "full head" or "half head". The blade shall have a beveled cutting edge, with the bevel on the side of the blade toward the handle. Type I adzes shall comply with the requirements of table I and be similar to figure 1 or 2.

TABLE I.— *Type I, carpenters' adz*

Dimensions	Inches	
	Minimum	Maximum
Width of cutting edge	3-1/2	4-1/2
Length from cutting edge to top	8-1/2	9-3/4
Curve of the blade in its length	1-1/8	2
Length of eyehole	2-1/4	2-7/8
Inside of small end eyehole	1 by 1-5/8	1-3/16 by 1-7/8
Inside of large end eyehole	1-1/8 by 1-7/8	1-3/8 by 2-1/4
Length of head	5/8	1-3/8
	Pounds	
	Minimum	Maximum
Weight without handle	3	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

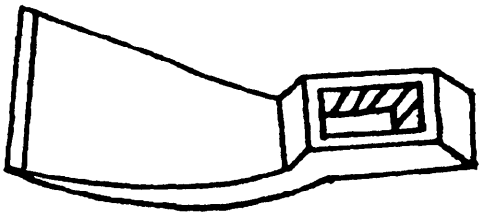


FIGURE 1.—Carpenters' "full head" adz

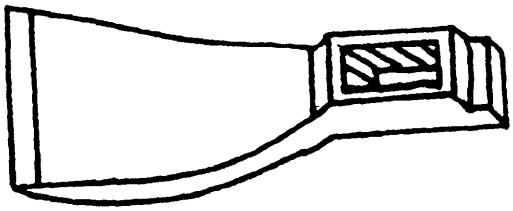


FIGURE 2.—Carpenters' "half head" adz.

(Figures 1 and 2.—Optional designs of type I, carpenters' adzes.)

3.8 Type II, railroad. The body shall consist of a full, flat head, a rectangular eyehole, and a thin arched blade. The blade shall be curved toward and at a right angle to the handle. The blade shall have a beveled cutting edge, with the bevel on the side of the blade toward the handle. Type II adzes shall comply with the requirements given in table II, and shall be similar to figure 3.

3.9 Type III, ship carpenters'. The body shall consist of an octagonal spur head which shall have a neat taper, a rectangular eyehole, and a thin arched blade curved toward and at a right angle to the handle. The blade shall have a plain bit with a beveled cutting edge with the bevel on the side of the blade toward the handle. Type III adzes shall comply with the requirements of table III and shall be similar to figure 4.

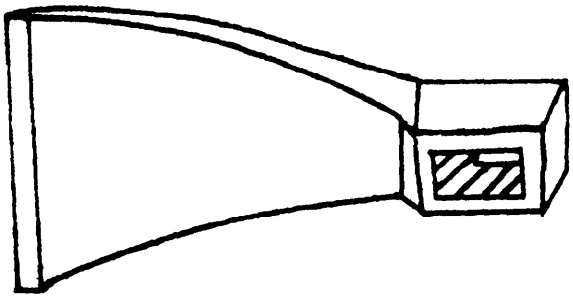


FIGURE 3.—Railroad adz.

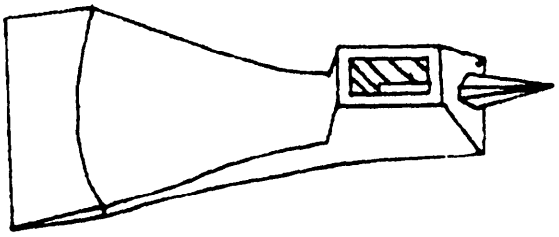


FIGURE 4.—Ship carpenters' adz, plain bit.

TABLE II.—*Railroad adz*

Dimensions	Inches	
	Minimum	Maximum
Width of cutting edge	4	6
Length from cutting edge to top	9-3/16	12
Curve of the blade in its length	1	1-7/8
Length of eyehole	2-1/4	3
Inside of small end eyehole	1 by 1-5/8	1-3/16 by 1-7/8
Inside of large end eyehole	1 by 1-7/8	1-1/2 by 2-1/4
Length of head	1	1-1/4
	Pounds	
	Minimum	Maximum
Weight without handle	4-1/2	6-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE III.—*Type III, ship carpenters' adz*

Dimensions	Inches	
	Minimum	Maximum
Width of cutting edge	4	5-1/2
Length from cutting edge to end of spur	10-3/4	11-3/4
Curve of the blade in its length	3/4	1-5/8
Length of eyehole	2-1/4	2-3/4
Inside of small end eyehole	1 by 1-5/8	1-1/8 by 1-7/8
Inside of large end eyehole	1-1/8 by 1-7/8	1-3/8 by 2-1/4
Length of spur	2-3/8	3-1/8
Diameter of spur, small end	1/4	3/8
Diameter of spur, large end	1/2	1
	Pounds	
	Minimum	Maximum
Weight without handle	2-1/2	4-1/4

3.10 Workmanship. Workmanship shall be of the highest grade throughout and equal in every respect to good commercial practice.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.3 End product inspection.

4.3.1 *Visual examination.* The examination of the end item shall be in accordance with the classification of defects and acceptable quality levels (AQL's) set forth below. The lot size shall be expressed in units of adzes of the same type for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one adz. The inspection level shall be S-3 with an AQL of 4.0 defects per hundred units.

TABLE IV.—*Classification of defects*

Examine	Defect
Finish (adz)	Finish not as specified.
	Top of head and bevel not polished.
	Paint not removed from cutting bevel.
	Not coated with a suitable rust-resisting material.
	Cracks, inclusions, porosity and segregation.
Finish (handle)	Not smooth waxed finish.
	Painted.
Construction (adz)	Not specified type.
	Flash, scale, rust or sharp edges other than specified.
	Beveled side of cutting edge not toward handle.
	Cutting edge not sharp, uneven, not at right angle to handle.
Handle	Split, gouged, cracked, splintered, et cetera.
	Defects or blemishes more than allowed by table I of NN-H-93
	Does not fit adz properly
Marking	Missing, not permanent, incorrect, not legible

4.3.2 *Dimensional examination.* Examination shall be made of the end item to determine compliance with dimensional require-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

ments. Any dimension that exceeds the specified tolerance shall be classified a defect. The inspection level shall be S3 with an AQL of 4.0 defects per hundred units.

4.3.3 *End item testing.* Each sample adz shall be tested as specified in 4.4.1 to determine hardness in compliance with 3.3. Noncompliance with requirement shall be cause for rejection.

4.3.4 *Examination of preparation for delivery.* Inspection to determine compliance with preparation for delivery shall be made in accordance with MIL-H-15424.

4.4 **Test procedures.**

4.4.1 *Hardness tests.* Hardness tests shall be in accordance with Fed. Test Method Std. No. 151 to determine compliance with 3.3.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 **Preservation and packaging.**

5.1.1 *Level A.* Level A cleaning, preservation, and packaging shall be in accordance with level A of MIL-H-15424.

5.1.2 *Level C.* Level C cleaning, preservation, and packaging shall be in accordance with the contractor's commercial practice.

5.2 **Packing.**

5.2.1 *Level A.* Level A packing shall be in accordance with level A of MIL-H-15424.

5.2.2 *Level B.* Level B packing shall be in accordance with level B of MIL-H-15424.

5.2.3 *Level C.* Adzes, cleaned, preserved and packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with the rules or regulations of carriers as applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies.* In addition to any special marking specified in the contract or order, each unit and intermediate package and shipping container shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Type of adz required (see 1.2.1).
(*c*) State whether forged high carbon steel adzes or forged alloy steel adzes are required (see 3.2).
(*d*) Without handle, if not required (see 3.5).
(*e*) Head design (see 3.7), if "full head" or "half head" is required.
(*f*) Levels of preservation, packaging and packing required (see section 5).
(*g*) Specify marking, if different (see 5.3)

6.2 **Transportation description.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail:
Adzes, with handles
Carload minimum weight 30,000 pounds.

Motor:
Adzes, with handles.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Freight Classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Review

Army—GL, EL, MO
Navy—Ships
Air Force—MOA

User

MC

Preparing Activity:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.