GGG-B-101d
April 18, 1963

SUPERSEDING
Int. Fed. Spec. GGG-B-00101c(GSA-FSS)
December 17, 1959 and
Fed. Spec. GGG-B-101b
August 10, 1956

FEDERAL SPECIFICATION

BARS: CHISEL, PINCH, PRY, WRECKING, DIGGING, TAMPING, DIGGING AND TAMPING; AND CROWBARS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope.** This specification covers chisel, pinch, pry, wrecking, digging, tamping, digging and tamping bars, and crowbars normally used by mechanics and laborers for opening large boxes and crates; as a lever for lifting heavy objects; for cold cutting; for loosening cylinder heads, gears, and bolts; for aligning metals; for earth digging and tamping; and other similar purposes, as applicable (see 6.1). Chisel-type crate and box openers of lesser capacity are covered by GGG-O-599.

1.1.1 *Federal specification coverage.* This specification does not include all types of bars nor all of those which are commercially available, but includes only those generally used by the Federal Government.

1.2 **Classification.**

1.2.1 *Types, classes, and styles.* The bars shall be of the following types, classes, and styles, as specified (see 6.2):

Type I.—Chisel.

Type II.—Crowbar.
- Class 1.—Pinch-point.
- Class 2.—Wedge-point.

Type III.—Pinch (offset).

Type IV.—Pry (rolling-head).

Type V.—Wrecking.
- Class 1.—Gooseneck and pinch-point.
  - Style A.—With claw.
  - Style B.—With claw and heel (door opener).
- Class 2.—Offset claw and pinch-point.

Type VI.—Earth digging and tamping.
- Class 1.—Posthole.
- Class 2.—Telegraph.

Type VII.—Earth digging.

Type VIII.—Earth tamping.

1.2.2 *Sizes.* The bars shall be of the sizes shown in tables I, II, III, IV, V, VI, VII, and VIII, as specified (see 6.2).

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Std. No. 151—Metals; Test Methods.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:37Z
Check the source to verify that this is the currentversion before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools; Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-130—Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of bars otherwise conforming to this specification.

3.2 Material. The material used in the manufacture of the bars shall be of either tool steel or an alloy steel. The chemical composition of the material and the heat treatment employed shall be such as to produce bars to withstand the tests as specified in 4.4. All forgings shall be of uniform quality, free from defects and imperfections that may affect their serviceability or durability.

3.3 Design.

3.3.1 ***Type I and type V, class 1, style A, and class 2.*** **The body of type I and type V, class 1, style A, and class 2 shall be either hexagonal or octagonal in cross section.**

3.3.2 ***Types II and III.*** **The body cross section of types II and III shall be hexagonal, octagonal, or square with either chamfered or rounded corners.**

3.3.3 ***Types IV, VI, VII and VIII.*** **The body of types IV, VI, VII, and VIII shall be round, hexagonal, or octagonal in cross section.**

3.3.4 ***Type V, class 1, style B.*** **The body of type V, class 1, style B shall be round or pentagonal, hexagonal or octagonal in cross section.**

3.4 Finish. The bars shall be free from burrs, roughness and excessive oxide scale. The body of the bars and the striking end of the type I bar shall be either lacquered, enameled, painted, or have an oil-coated natural finish. The work ends of the bars except for types VI, VII, and VIII shall be smoothly ground and have a natural finish, oil coated or lacquered. The work ends of the types VI, VII, and VIII bars shall have a smooth finish, oil coated, lacquered, or painted.

3.5 Identification marking. Each bar shall be plainly and permanently marked with the name of the manufacturer or with a trademark of such known character that the source of manufacture may be readily determined. For military purchases each bar shall be plainly and permanently marked in accordance with MIL-STD-130.

3.6 Type I chisel. Type I bars shall have

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

a double-beveled cutting edge, ground on both sides to an included angle of 60 degrees plus or minus 5 degrees. The minimum width of the cutting edge shall be equal to the distance across the flat surfaces of the bar. The striking end of the bar shall be neatly and uniformly chamfered.

3.6.1 *Hardness.* The work end of the bar shall show a hardness reading of not less than 48 nor more than 56 on the Rockwell C scale. The striking end of the bars shall show a hardness reading of not less than 35 nor more than 45 on the Rockwell C scale (see 4.4.1).

3.6.2 Type I bars shall conform to table I and shall be similar to figure 1.

Table I - Type I chisel bar.

Size number	Dimension between opposite flats ±1/32 inch	Length overall ± inch
	Inches	Inches
1	5/8	18
2	3/4	24
3	7/8	30
4	1	36

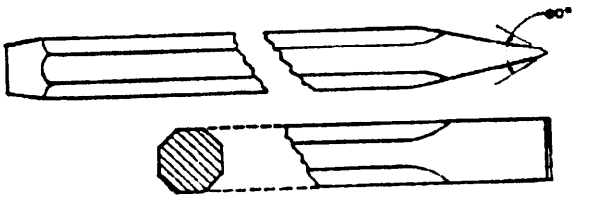


Figure 1.–Type I, chisel bar.

3.7 **Type II, crowbar.** Type II bars shall have a round handle tapering slightly toward the handle end. The work end shall be equal in width to the distance across the flat surfaces of the bar.

3.7.1 *Hardness.* The work ends of the bars shall show a hardness reading of not less than 38 nor more than 48 on the Rockwell C scale (see table II and 4.4.1).

3.7.2 *Class* 1, *pinch-point.* The formed end of class 1 bars shall have square sides, with a flat single beveled edge. The bars shall conform to table II and shall be similar to figure 2.

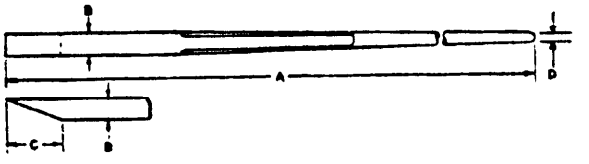


Figure 2.– Type II, class 1, crowbar, pinch-point.

Table II - Type II, class 1 and class 2 crowbar, pinch-point and wedge-point.

Size number	A		B	C	D	Area of hardness from pinch or wedge point	Weight		Test load
	Minimum	Maximum	±1/16	Minimum	±3/16	Minimum	Minimum	Maximum	Minimum
	Inches	Inches	Inches	Inches	Inch	Inches	Pounds	Pounds	Pounds
1	35	37	7/8	2	9/16	4	5	7	100
2	47	49	1	2-1/2	3/4	5	9	11	150
3	55	52	1-1/8	2-1/2	3/4	5	11	13	175
4	59	62	1-1/4	3	7/8	6	17	19	200
5	62	65	1-3/8	3	7/8	6	21	23	250
6	65	68	1-1/8	3	7/8	6	25	27	300

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.7.3 *Class 2, wedge-point.* The formed end of class 2 bars shall have square sides with a double-beveled edge. The bars shall conform to table II and shall be similar to figure 3.

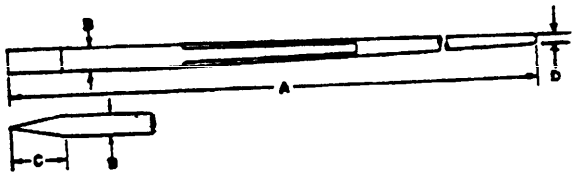


Figure 3.- Type II, class 2, crusher, wedge-point.

3.8 **Type III, pinch (offset).** Type III bars shall have one end rounded and offset. The other end shall be round and tapered for bringing holes into alignment in metal plates.

3.8.1 *Hardness.* The work ends of the bar shall show a hardness reading of not less than 35 nor more than 45 on the Rockwell C scale (see 4.4.1).

3.8.2 Type III bars shall conform to table III and be similar to figure 4.

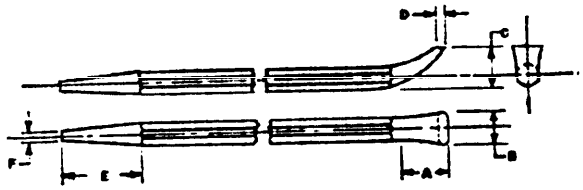


Figure 4.- Type III, pinch (offset).

3.9 **Type IV, pry (rolling-head).** Type IV bars shall have the work end terminate in a rounded rolling head. The back side of the rolling head shall be suitably rounded. That portion of the head opposite the rounded side shall form a hook. The tapered end of the bar shall be round, smoothly finished, neatly and uniformly tapered, and shall be provided with a pointed end.

3.9.1 *Hardness.* The hardness shall be as specified in 3.7.1.

3.9.2 Type IV bars shall conform to table IV and shall be similar to figure 5.

Table III - Type III, pinch (offset).

Size number	Dimensions between opposite flats ±1/32	Length overall ±1/2	Dimensions						Test load minimum
			A ±1/8	B ±1/32	C ±1/16	D ±1/64	E ±1/8	F ±1/64	
	Inch	Inches	Inches	Inches	Inches	Inch	Inches	Inch	Pounds
1	1/2	13-1/2	1	11/16	15/16	3/16	2-3/4	3/16	40
2	3/4	24	1-1/4	3/4	1- 3/16	1/4	3	1/4	50
3	3/4	26	1-1/2	1	1- 1/4	5/16	3	5/16	75
4	7/8	30	1-3/4	1- 1/8	1- 1/2	3/8	3-1/2	3/8	100
5	1	36	2	1- 1/4	1- 3/4	7/16	4	7/16	150

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

Table IV - Type IV, pry (rolling-head)

Size number	Dimension between opposite flats		Length overall		Dimensions												Test load minimum
					A		B	C	D		E	F		G			
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Minimum	Minimum	Maximum	Minimum	Minimum	Maximum	Minimum	Maximum		
	Inch	Inch	Inches	Inches	Inch	Inch	Inch	Inches	Inch	Inch	Inches	Inch	Inch	Inch	Inch		Pounds
1	1/2	9/16	15	16	1/2	9/16	9/16	1-3/8	1/2	9/16	4-3/4	3/16	1/4	7/32	9/32		75

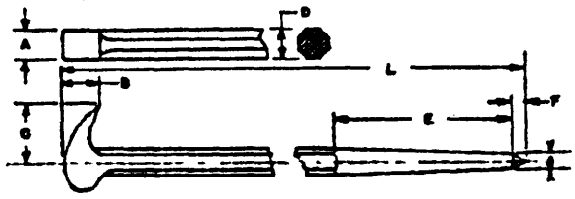


Figure 5.—Type IV, pry (rolling-head).

3.10 **Type V, wrecking.** For a minimum distance of 2-3/4 inches from each end, type V wrecking bars shall have a hardness value of not less than 28 nor more than 47 Rockwell C.

3.10.1 *Class 1, gooseneck and pinch-point.* Class 1 bars shall have one end bent in the form of a gooseneck and the opposite end in the form of a pinch-point.

3.10.1.1 *Style A with claw.* Style A bars shall have the gooseneck provided with a slotted claw suitable for pulling nails. The opposite end shall be wedge-shaped and shall be offset at an angle of 30 plus or minus 5 degrees from the longitudinal axis of the bar. Style A bars shall have both ends hardened for a distance of at least 2-3/4 inches in from each end, the hardened portions shall have a hardness value of no less than 42 nor more than 47 on the Rockwell C scale (see 4.4.1). The bar shall conform to table V and shall be similar to figure 6.

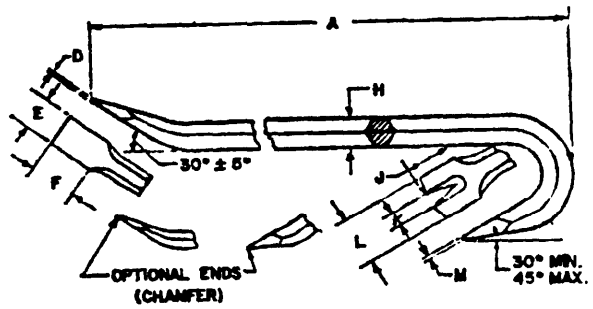


Figure 6.— Type V, class 1, style A wrecking bar, gooseneck, with claw, and pinch point.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the currentversion before use.

Table V - Type V, class 1, style A wrecking bar, gooseneck with claw and pinch point, with claw.

Size number	Dimensions									Test load
	A	D	E	F	H	J	K	L	M	
	+1.000 -0.500	±1/32	+1/8 —1/16	±1/8	±1/32	Minimum	±1/16	Minimum	±1/32	Minimum
	Inches	Inch	Inches	Inches	Inch	Inches	Inch	Inches	Inch	Pounds
1	12	1/16	3/4	1	1/2	3/4	1/4	1-1/16	1/16	75
2	18	1/16	15/16	1-1/8	5/8	1	5/16	1-1/8	1/16	100
3	24	1/16	1	1-3/8	3/4	1-5/16	7/16	1-3/16	1/16	150
4	30	1/16	1	1-3/8	3/4	1-5/16	7/16	1-3/16	1/16	150
5	36	1/16	1	1-3/8	3/4	1-5/16	7/16	1-3/16	1/16	150
6	48	1/16	1	1-3/8	3/4	1-5/16	7/16	1-3/16	1/16	150
7	60	1/8	1- 3/8	1-1/2	1	1-5/8	7/16	1-5/8	1/16	175

3.10.1.2 *Style B, with claw and heel (door opener)*. Style B bars shall be suitable for opening doors and removing obstructions in fire-fighting operations. The gooseneck end of the bar shall be provided with a heel. The opposite end shall be rounded and offset in the same direction as the gooseneck, and shall be provided with a slotted claw. The bars shall conform to the dimensions shown on figure 7.

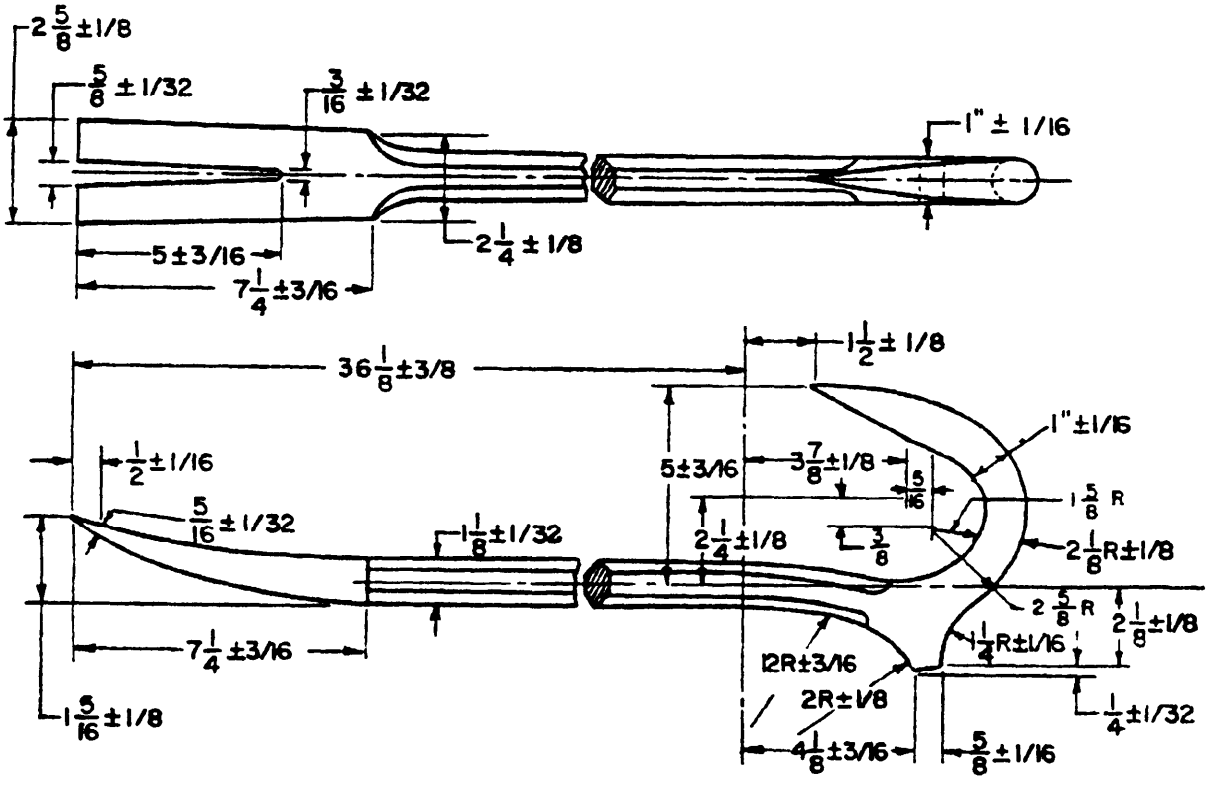


Figure 7.- Type V, class 1, style B wrecking bar, gooseneck, with heel, and pinch point, with claw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

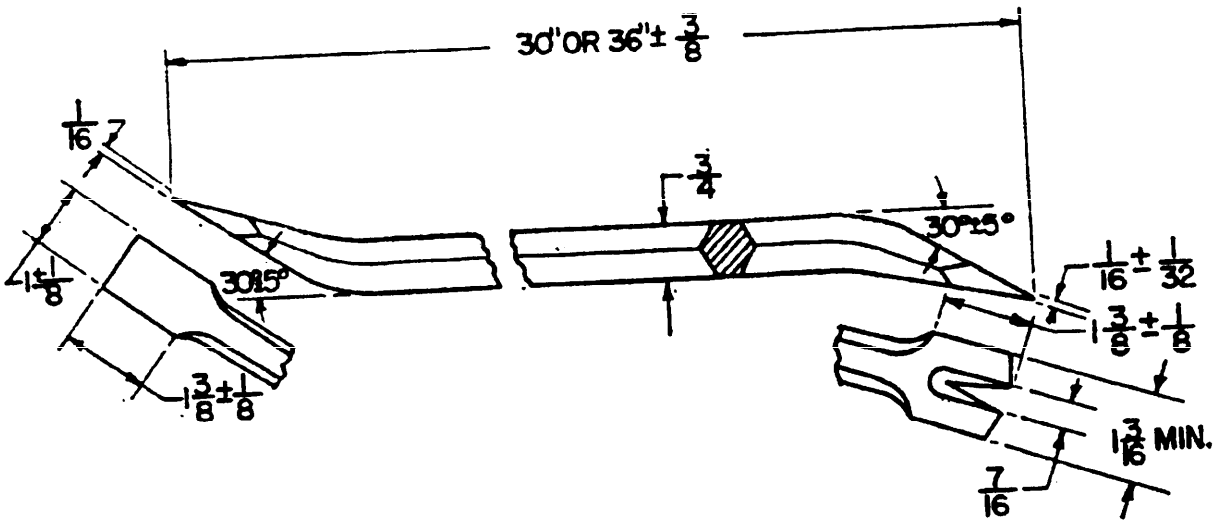


Figure 8.- Type V, class 2 wrecking bar, offset claw and pinch-point.

3.10.2 *Class 2, offset claw and pinch-point.* Class 2 bars shall have the ends offset in opposite directions at an angle of 30 plus or minus 5 degrees from the longitudinal axis. Both ends shall be wedge-shaped with one end provided with a slotted claw suitable for pulling nails. The bars shall be furnished in lengths of 30 or 36 inches as specified (see 6.2). Class 2 bars shall have both ends hardened for a distance of at least 2-3/4 inches in from each end, the hardened portion shall have a hardness value of not less than 42 nor more than 47 on the Rockwell C scale (see 4.4.1). The bar shall conform to the dimensions shown in figure 8.

3.11 Type VI, earth digging and tamping. Type VI bars at one end shall be provided with a tamping head suitable for tamping operation and the opposite end formed to a bit. The bit end shall be smoothly finished and uniformly tapered, having a cutting edge ground to a double-beveled edge. The tamping head shall have a flat surface for tamping and the opposite side of the tamping head shall be either flat or beveled.

3.11.1 *Hardness.* The chisel end of the bar shall show a hardness reading of not less than 42 nor more than 52 on the Rockwell C scale (see 4.4.1).

3.11.2 *Class 1, posthole.* The sides of the bit shall be either parallel or tapered toward the shank. Class 1 bars shall conform to table VI and shall be similar to figure 9.

Table VI.- Type VI, class 1, earth digging and tamping bar, posthole.

Size Number	Dimensions													Weight	Test Load
	A		B		C		D	E	F	G	H	I			
	Min.	Max.	Min.	Max	Min.	Max.	Min.	Min.	±1/32	Min.	Max.	Min.		Min.	Min.
	Inches	Inches	Inches	Inches	Inches	Inches	Inch	Inches	Inch	Inch	Inch	Inch		Pounds	Pounds
1	68-1/2	73	2-1/8	2-5/8	2-1/4	3	1/8	8-1/2	1	1/4	1/4	3/4		15	150

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:37Z
Check the source to verify that this is the current version before use.

Table VII - Type VI, class 2 earth digging and tamping bar, telegraph.

Size number	Dimensions												Weight	Test load
	A		B		C	D		E	F		G	H		
	Mini-mum	Maxi-mum	Mini-mum	Maxi-mum	Mini-mum	Mini-mum	Maxi-mum	Mini-mum	Mini-mum	Maxi-mum	Mini-mum	Maxi-mum	Mini-mum	Mini-mum
	Inches	Inches	Inches	Inches	Inch	Inches	Inches	Inches	Inches	Inches	Inches	Inch	Pounds	Pounds
1	82-1/2	85	2-1/16	2-1/2	3/16	1-3/32	1-5/32	7/8	2-1/4	2-5/8	3-7/8	3/16	23	300
2	95	97	2-1/4	2-1/2	3/16	1-3/32	1-5/32	1-1/4	2-1/4	2-5/8	3-7/8	1/4	25	250

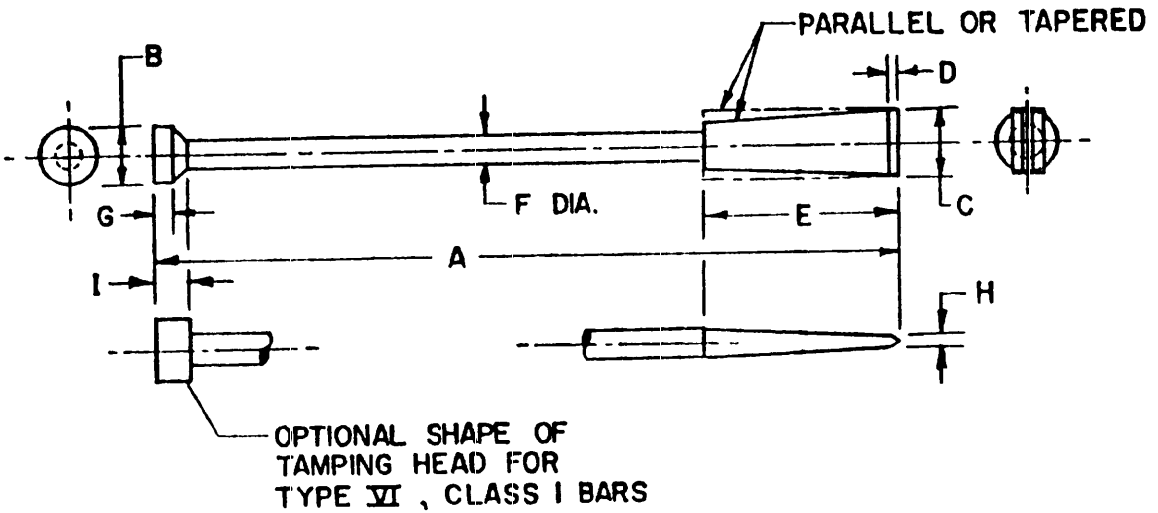


FIGURE 9.—Type VI, class 1, earth-digging and tamping bar posthole.

3.11.3 *Class 2, telegraph.* Class 2 bars shall conform to table VII and shall be similar to figure 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

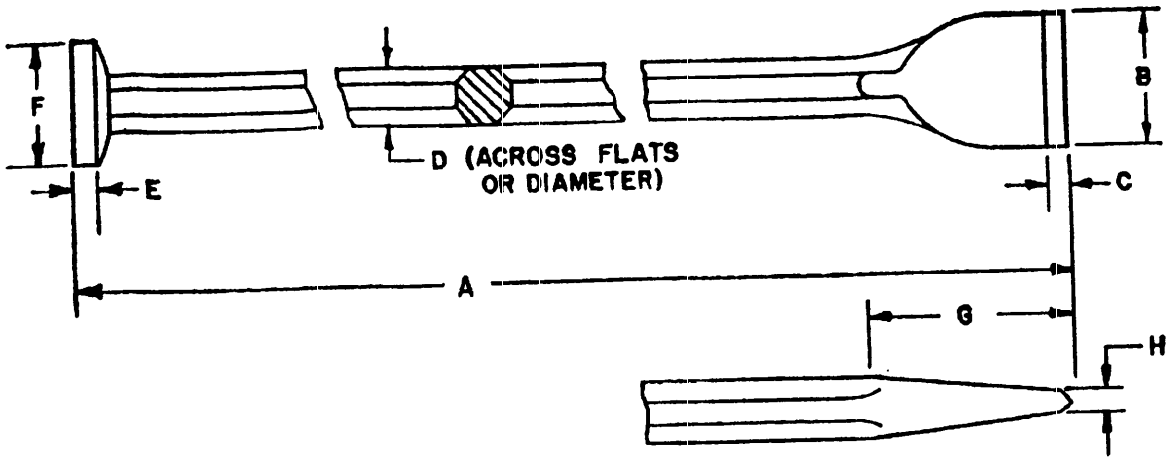


Figure 10.– Type VI, class 2, earth-digging and tamping, bar, telegraph.

3.12 **Type VII, earth digging.** Type VII bars at one end shall be provided with a suitably formed bit, smoothly finished, and uniformly tapered having a cutting edge ground to a double-beveled edge. The opposite end of the bar shall terminate in a round uniform tapered point. The earth-digging bar shall conform to table VIII and shall be similar to figure 11.

Table VIII - Type VII earth-digging bar.

Size number	Dimensions												Weight	Test load
	A		B		C		D		E	F	G			
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Minimum	Maximum		Minimum	Minimum
	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inch	Inches	Inch		Pounds	Pounds
1	83	85	3-7/8	4-1/8	1- 3/32	1-5/32	2	2-1/2	1/4	3-7/8	1/4		33	300
2	95	97	3-7/8	4-1/8	1- 3/32	1-5/32	2	2-1/2	1/4	3-7/8	1/4		25	250
3	95	97	2-3/8	2-5/8	31/32	1-1/32	1-7/8	2-1/8	1/4	3-1/2	1/4		23	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

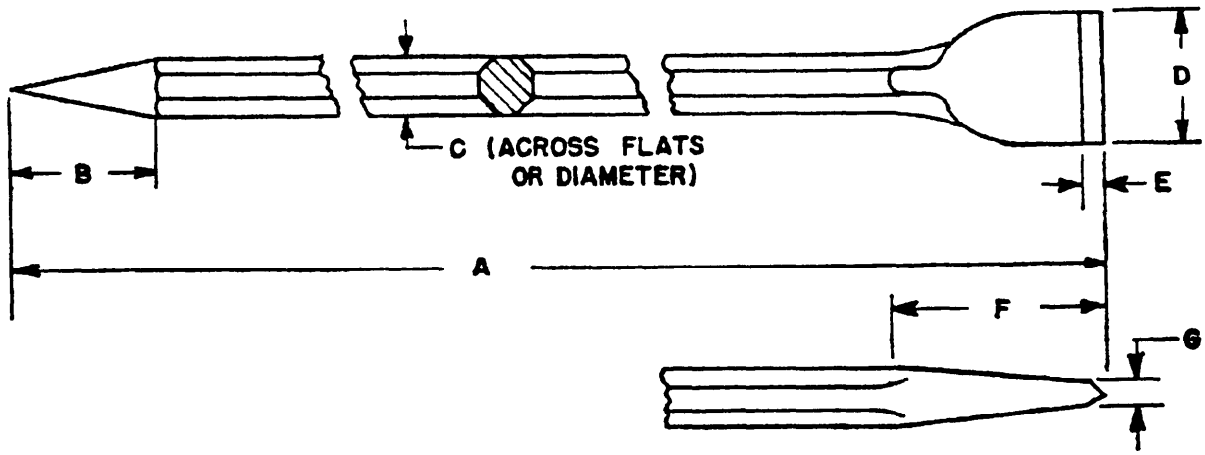


Figure 11.–Type VII, earth-digging bar.

3.12.1 *Hardness.* The work ends of the bar shall show a hardness reading of not less than 42 nor more than 52 on a Rockwell C scale (see 4.4.1).

3.13 **Type VIII, earth tamping.** Type VIII bars at one end shall be provided with a suitably formed bit, smoothly finished, and uniformly tapered to a straight chisel edge. The opposite end shall be bent and provided with a suitable tamping edge. The earth tamping bar shall conform to table IX and shall be similar to figure 12.

Table IX - Type VIII earth-tamping bar.

Size number	Dimensions										Weight	Test load
	A		B	C		D	E	F	G	H		
	Minimum	Maximum	±1/32	Minimum	Maximum	±1/2	±1/8	±1/2	±1/2	±1/32	Minimum	Minimum
	Inches	Inches	Inch	Inches	Inches	Inches	Inches	Inches	Inches	Inch	Pounds	Pounds
1	60	62	7/8	3-3/4	4-1/4	3	2	3	3-3/4	1/2	13	100

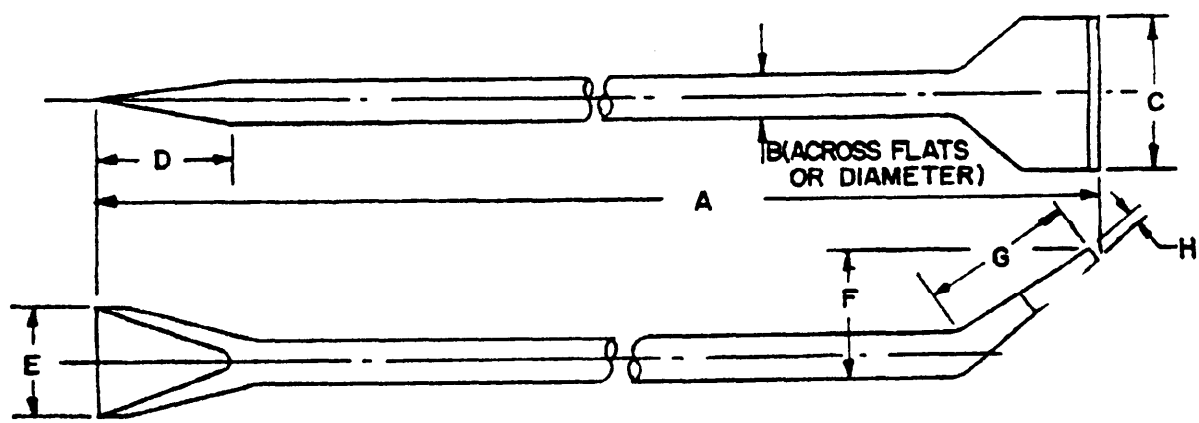


Figure 12.–Type VIII, earth tamping bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

3.13.1 *Hardness.* The work ends of the bar shall show a hardness of not less than 42 nor more than 52 on the Rockwell C scale (see 4.4.1).

3.14 Workmanship. Workmanship shall be of the highest grade throughout and equal in every respect to good commercial practice. Bars shall be free from any imperfections that may affect their durability or serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for quality conformance inspection.

4.2.1 *Inspection lot.* All bars of the same type, class, style and size presented at one time shall be considered a lot for purposes of quality conformance inspection.

4.2.2 *Sampling for examination.* A random sample of bars shall be selected for inspection in accordance with table X from each inspection lot of material offered for examination with lot acceptance based on the following sampling inspection requirements in accordance with MIL-STD-105.

Table X - Sampling for examination
AQL - 1.5 percent defective.

Number of bars in inspection lot	Number of bars in the sample
40 and under	Inspection level III
41 to 300	Inspection level II
301 and over	Inspection level I

4.2.3 *Sampling for tests.* A random sample of bars shall be selected from each inspection lot in accordance with table XI and shall be subjected to the tests specified in 4.3.2.

4.3 Inspection.

4.3.1 *Examination.* Each of the sample bars selected in accordance with table X shall be examined to verify compliance with this specification. Examination shall be conducted as specified in table XII. Any bar in the sample containing one or more defects shall be rejected, and if the number of defective bars in any sample exceeds the acceptance number for that sample the lot represented by the sample shall be rejected.

Table XI - Sampling for tests.

Number of bars in inspection lot	Number of bars in sample	Acceptance number (defectives)	Rejection number (defectives)
15 and under	3	0	1
16 to 40	5	0	1
41 to 110	7	0	1
111 to 300	10	0	1
301 to 500	15	1	2
501 to 800	25	2	3
801 and over	35	3	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

Table XII. - Classification of defects in accordance with Standard MIL-STD-105.

Categories	Defects
Critical:	
1	None defined
Major:	
101	Type, class, and size not as specified
102	Evidence of rust, laps or cracks; not free from burrs, roughness and forging flash
103	Body cross section not as required, distance between opposite flats or diameter (as applicable) not as specified
104	Ends defective, improperly formed, or not ground as required
105	Striking end of bar not chamfered or working end not smoothly tapered with a double-beveled chisel edge (type I only)
106	Formed end not square, or chisel edge not flat (type II only)
107	Amount of offset or "D" dimension not within the specified tolerance (type III only)
108	Angle of inside face of hook with handle not within the specified tolerance, "C" or "B" dimension not within the specified tolerance (type IV only)
109	Angle of offset end, thickness at points, or width or slot not within the specified tolerance (type V, class 1 only)
110	Radius of gooseneck not within the specified tolerance (type V, class 1 only)
111	Angle of offsets, thickness at points, or width of slot not within the specified tolerances (type V, class 1 only)
112	Length of offset(s) not within the specified tolerance (type V only)
113	Tamping end (class A only) not smoothly ground or working end not uniformly tapered with a double-beveled chisel edge (type VI only)
Minor:	
201	Width of working (or digging) end not within the specified tolerance
202	Length or diameter at end of tapered portion on handle end not within the specified tolerance (types III and IV only)
203	Length of offset portion not within the specified tolerance (type III only)
204	Width of rolling end not within the specified tolerance (type IV only)
205	Length of digging (or bit) end not within the specified tolerance (type VI only)
206	Length of ground section of working ends not within the specified tolerance (type V only)
207	Angle of gooseneck inner working surface with the handle not within the specified tolerance (type V, class A only)
208	Diameter or thickness of tamping end not within the specified tolerance (type VI, class 1 only)
209	Length of tapered end not within the specified tolerance (type VI, class 1 only)
210	Length of overall not within the specified tolerance
211	Ground surfaces and natural finish surfaces not coated with an oil or grease compound to prevent rust or corrosion
212	Marking, manufacturer's name or trademark missing, illegible, incorrect, or not permanent

4.3.2 *Tests.* Each of the sample bars selected in accordance with table X shall be tested in accordance with 4.4.1 and 4.4.2 to verify compliance with this specification. Any sample bar which does not meet the requirements for any of these characteristics shall be rejected, and if the number of nonconforming bars in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.4 **Test procedures.**

4.4.1 *Hardness tests.* Hardness tests shall be in accordance with method 243 of Fed. Std. No. 151 to determine compliance with 3.6.1, 3.7.1, 3.8.1, 3.9.1, 3.10.1.1, 3.10.2, 3.11.1, 3.12.1, and 3.13.1. Except for types II and VI, class 1, the impressions shall be taken 1/2 inch from the end tested. Impressions taken on pinch or wedge point end of type II bars shall be taken within the area specified in table II. Impressions taken on

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

type VI, class 1 bars shall be not less than 1 inch from the cutting end.

4.4.2 *Physical test.*

4.4.2.1 *Type I chisel bars.* The sample chisel bars shall be held securely in a vertical position by a vise or clamp, with the striking end of the chisel bar resting on a solid foundation. A round steel bar, at least 3/4 inch in diameter and having a hardness value of 20 to 28 on the Rockwell C scale, shall be held at right angles with the cutting edge of the chisel bar and struck a sufficient number of blows with a heavy hammer to make a cut in the round steel bar at least 1/8 inch deep. Three such cuts shall be made without the cutting edge of the chisel bar chipping or showing undue wear.

4.4.2.2 *Type II crowbars.* The sample crowbars shall be subjected to the following tests: Two inches of the pointed end (or work end) shall be held securely or supported in a suitable holder, such as a vise, and the test load specified in table II applied at approximately the midpoint of the handle section in a direction perpendicular to the body. After applying the test load, the crowbar shall not take a permanent set, fracture, or fail otherwise.

4.4.2.3 *Type III pinch bars.* The sample pinch bars shall be subjected to the following tests: The entire offset end of the bar (dimension A, table III) shall be rigidly secured by means of a vise or clamp and the test load specified in table III shall be applied to the body approximately 2 inches from the tapered end in a direction perpendicular to the body. The manner of applying the load shall be such as to straighten the offset. After applying the load, the pinch bar shall not take permanent set nor shall the offset end fracture when so tested. Three inches of the tapered end shall be clamped and the bar shall be subjected to the same test except that the load applied shall be one-third the test load for the offset end.

4.4.2.4 *Type IV pry bars.* The rolling head of the type IV bars shall be rigidly secured by means of a vise or clamp in a manner to apply a load to straighten the angular hook. The test load specified in table IV shall be applied to the body 4-3/4 inches from the tapered end in a direction perpendicular to the body. After applying the load, the pry bar shall not take permanent set and shall not fracture when so tested. The tapered end shall also be subjected to the same test except 4-3/4 inches of the tapered end shall be clamped and the load applied 1 inch from the rolling-head end.

4.4.2.5 *Type V wrecking bars.* One and one-half inches of the wedge-shaped offset end of the type V bars shall be rigidly secured by means of a vise or clamp, and the test load specified in table V shall be applied to the body at a point 8, 14, 20, 26, 32, 44 or 56 inches from the clamped end, if applicable, in a direction perpendicular to the body. The manner of applying the load shall be such as to straighten the offset. The wrecking bar shall not take permanent set and shall not fracture when so tested. The claw end shall also be subjected to the same test.

4.4.2.6 *Type VI digging and tamping bars, type VII digging bars, and type VIII tamping bars.* Two and one-half inches of the bit or cutting edge of the type VI bars shall be held securely or supported in a suitable holder, such as a vise and the test load specified in table VI for type VI, class 1, table VII for type VI, class 2; table VIII for type VII; and table IX for type VIII applied at the midpoint of the bar body in a direction perpendicular to the body. After applying the test load, the bar shall not take a permanent set, fracture or fail otherwise. The opposite end shall also be subjected to the same test except that 4-1/2 inches of the taper or head end shall be clamped and the load applied 10 inches from the bit or cutting edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

(For civil agencies, Fed. Std. No. 102 should be referred to for definitions and applications of the various levels of protection.)

5.1 Cleaning, preservation and packaging.

5.1.1 *Level A.* Preservation and packaging of bars shall be in accordance with level A of MIL-H-15424. Preservative compounds shall not be required when surfaces of the bars are protected with a vitreous or plastic coating, prime coated or painted. Unit packaging for level A shall be in accordance with method III.

5.1.2 *Level C.* Cleaning, preservation, and packaging shall be in accordance with the contractor's commercial practice.

5.2 Packing.

5.2.1 *Level A.* Bars, packaged as specified (see 6.2), shall be packed in accordance with level A requirements of MIL-H-15424.

5.2.2 *Level B.* Bars, packaged as specified (see 6.2), shall be packed in accordance with level B requirements of MIL-H-15424.

5.2.3 *Level C.* Bars, packaged as specified (see 6.2), shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Military.* In addition to any special marking required by the contract or order, or herein, interior packages and exterior shipping containers shall be marked in accordance with MIL-H-15424.

5.3.2 *Civil agencies.* In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use. Bars covered by this specification are intended for use as follows:

6.1.1 Type I chisel bars have a chisel point on one end for cold cutting and prying and the other end blunt for use with a striking tool.

6.1.2 Type II crowbars are long prying bars and in railroad terminology referred to as "lining bars".

6.1.3 Type III offset pinch bars have one end of a round tapering design for use as an aligning tool and the other end offset for prying. They are generally used by maintenance men and structural steel workers.

6.1.4 Type IV pry bars (rolling head) have one end of a round tapering design for use as an aligning tool, and a rolling head on the other end for loosening cylinder heads, gears, and bolts, and are generally used by automotive mechanics.

6.1.5 Type V, class 1, style A wrecking bars have an offset pinch-point on one end for use as a prying tool, and a claw-head gooseneck on the other end for removing nails, and are generally used by laborers employed in wrecking structures.

6.1.6 Type V, class 1, style B wrecking bars have a rounded offset pinch-point with slotted claw for use as a pry and for removing nails, and a gooseneck pry on the opposite end generally used in opening doors and removing obstructions in fire fighting operations.

6.1.7 Type V, class 2 wrecking bars have two offset pinch-points; one pinch point is provided with a slotted claw. They are generally used by laborers employed in wrecking structures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

6.1.8 Type VI, tamping and digging bars have a chisel point on one end for cutting and prying and the other end blunt for use as a temper. They are referred to in telegraphic and railroad terminology as "post-hole" and "telegraph pole", "earth digging and tamping bar", and used by laborers employed in earth digging.

6.1.9 Type VII digging bars shall have a chisel point at one end and the opposite end a round tapered point for cutting and prying. They are generally used by laborers employed in earth digging.

6.1.10 Type VIII tamping bars shall have a chisel point at one end and the opposite end a rectangular-shaped edge for tamping. They are referred to in railroad terminology as a "tamper", and used by laborers as an earth tamper.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type, class, and style (as applicable) of bars required (see 1.2.1).

(*c*) Size number and length of bars required (see applicable table and 3.10.2).

(*d*) Level of packaging and packing required (see 5.1 and 5.2).

(*e*) Marking, if different (see 5.3).

6.3 Transportation description. The applicable transportation description is:

Types I, II, III, IV, and V:

Bars, claw, crow, or wrecking:

Carload minimum weight 36,000 pounds.

Truckload minimum weight 36,000 pounds.

Types VI, VII, and VIII:

Bars, digging or tamping, not otherwise indexed by name, iron or steel:

Carload minimum weight 36,000 pounds.

Truckload minimum weight 36,000 pounds.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—Q

Navy—Sh

Air Force—MOA

Copies of this specification may be purchased for 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.