GGG-H-135
January 29, 1966

SUPERSEDING
Int. Fed. Spec. GGG-H-00135 (GSA-FSS)
March 25, 1964

FEDERAL SPECIFICATION

HAWK, PLASTERER'S

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 The plasterer's hawk is used for holding mortar, cement, plaster, or mastic paste, prior to application. This specification covers one size of plasterer's hawk, as hereinafter specified.

1.1.1 *Federal specification coverage.* This specification covers only those sizes of hawks generally purchased by the Federal Government and is not intended to include all of the sizes that are commercially available.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools, Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. Materials used in the construction of hawks shall be as specified hereinafter. All materials shall be of uniform quality and free from all defects and imperfections that may affect their serviceability or durability.

3.2 Component parts. The hawk shall consist essentially of a plate, handle, and handle mounting and securing hardware.

3.2.1 *Plate.* The plate shall be of either aluminum alloy or magnesium alloy. The plate shall be 13 inches long by 13 inches wide, plus or minus 1/8 inch and shall have

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

a minimum thickness of 0.0750 inch. Corners shall be rounded to a minimum radius of 1/2 inch and the plate shall be free of burrs, sharp edges, or sharp projections. The plate shall be scored on the holding surface for purposes of increasing its retention quality.

3.2.2 *Handles.* The handle shall be of clear straight-grained hardwood, such as hickory, maple, beech, birch or basswood. Handles shall be smoothly finished, round, and suitably designed to afford a comfortable handgrip. The handle shall be not less than 4-7/8 inch nor more than 5-1/8 inch in length and the diameter shall be not less than 1-1/2 inch nor more than 1-3/4 inch. A tapered handle is acceptable, provided it is within the diameter range specified.

3.2.3 *Handle mounting.* The mounting shall be of cast aluminum alloy, magnesium alloy, or zinc casting. The minimum diameter of the mounting shall be 3-1/2 inches. The internal threaded depth of hub shall be a minimum of 7/16 inch and threads shall be capable of accommodating the bolt (see 3.3).

3.3 **Assembly.** The handle mounting shall be affixed to the plate by a minimum of four rivets. Rivets shall be flush with the handle mounting and plate. The handle shall be attached to the mounting by means of a bolt longitudinally through the handle and a locking feature shall be included to assure that the handle shall not turn on the bolt when assembled. The minimum diameter of the bolt shall be 5/16 inch. When specified, a sponge rubber callous preventer will be provided (see 6.1).

3.4 **Identification marking.** The plate or handle mounting shall be marked in a legible and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined.

3.5 **Workmanship.** Workmanship shall be of first class quality in every respect and in accordance with good commercial practice.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.4.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein or, if none, in accordance with this specification.

4.2 **Sampling procedures.** Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

TABLE I. *Sampling data*

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Par. reference
Visual examination	1 ea.	II	4.0	Defects per hundred units	4.3.1
Dimensional examination	1 ea.	II	4.0	Defects per hundred units	4.3.2
Testing	1 ea.	S-3	1.5	Defects per hundred units	4.4
Preparation for delivery	1 ea.	S-2	4.0	Defects per hundred units	4.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:37Z
Check the source to verify that this is the current version before use.

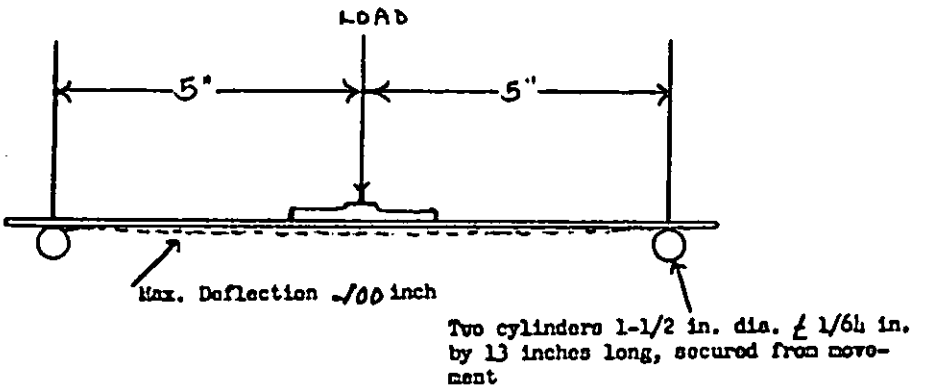


FIGURE 1. Load test

4.3 Examination.

4.3.1 *Visual examination.* Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking.

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1.

4.4.1 *Deflection.* The hawk plate shall be positioned as shown in figure 1. A 10 pound load shall be applied at the center point. Deflection shall not exceed 0.100 inch.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table II. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot (see table I).

TABLE II. *Classification of preparation for delivery defects*

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.)

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.1), the plasterer's hawk shall be preserved, packaged, and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C and the level of packing A, B, or C as specified (see 6.1).

5.1.1 As part of the requirements of section 5 of this specification, the following is considered a part of table I of MIL-H-15424.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:37Z
Check the source to verify that this is the current version before use.

Column 1	Column 2	Column 3	Column 4	Column 6
Hawk, plasterer's	P-1	I	6	12

5.2 Marking.

5.2.1 *Civil agencies.* In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 *Military activities.* In addition to markings required by the contract or order, the interior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 **Ordering data.** Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Level of preservation, packaging, and packing required (see 5.1).
(*c*) Marking, if different (see 5.2).
(*d*) Callous preventer, when required (see 3.3).

6.2 **Transportation descriptions.** Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tools, not otherwise indexed by name. Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, not otherwise indexed. Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

MILITARY INTEREST:

DOD coordination has been waived.

Preparing Activity:

GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:37Z
Check the source to verify that this is the currentversion before use.