GGG-P-00151B(GSA-FSS)
February 1, 1971
Interim Revision of
Fed. Spec. GGG-P-151a
October 13, 1953

INTERIM FEDERAL SPECIFICATION

PEAVY; HOOK, CANT; AND CARRIER, TIMBER

This Interim Federal Specification was developed by Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification GGG-P-151a, dated October 13, 1953.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers peavies, cant hooks, and timber carriers, used for rolling, turning, pushing, and guiding poles, logs, etc.

1.2 Classification.

1.2.1 Types. The tools covered by this specification shall be of the following types as specified (see 6.1).

Type I. Peavy.

Type II. Cant hook.

Type III. Timber carrier.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on the date of invitation for bids or requests for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

QQ-I-666 - Iron Castings, Malleable.
NN-H-93 - Handles, Hickory Striking Tool.
TT-W-572 - Wood Preservative, Water Repellent.
PPP-P-40 - Packaging and Packing of Hand Tools.

Federal Standard:

Fed. Std. No. 151 - Metals; Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specification procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents for a part of this specification to the extent specified herein. Unless a specific issue is identified, the issues in effect on date of invitation for bids or request for proposal shall apply.

Governmental:

National Bureau of Standards (NBS) Handbook:

H28-Screw - Thread Standards for Federal Services and Supplements.

(Application for copies of National Bureau of Standards Handbook should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

Nongovernmental:

Society of Automotive Engineers (SAE) Handbook:

SAE Standard - Chemical Compositions of
SAE Carbon Steels - SAE J-403a.

(Copies of SAE publications may be obtained upon application to the Society of Automotive Engineers, Incorporated, 485 Lexington Avenue, New York, N. Y. 10017.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive, and are not intended to preclude the purchase of peavies, cant hooks, and timber carriers otherwise conforming to this specification.

3.2 Materials. The materials used in the manufacture of peavies, cant hooks, and timber carriers shall be as specified herein, and shall be free from all defects and imperfections that may affect the serviceability of the finished product.

3.2.1 Handles. Unless otherwise specified (see 6.1), the handles shall conform to Grade B of Interim Federal Specification MM-H-93, or a good grade of ash. The moisture content of the wood shall not exceed 18 percent, and the dimensions shall be as specified in paragraphs 3.8.5 for "peavy", 3.9.5 for "cant hook", and 3.10.4 for "timber carrier".

3.3 Finish. All metal parts shall be free from scale, burrs, fins, nodules, and cracks, and given a protective coating of black oxide, or painted in accordance with the manufacturer's standard practice for this type of equipment. The wood handles shall be sanded, polished, and finished in accordance with the manufacturer's standard practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

3.4 Screw threads. All screw threads specified herein shall be in accordance with the applicable requirements of H28.

3.5 Hook assembly. Hooks, when assembled, shall operate freely without excessive looseness and play under normal working conditions.

3.6 Interchangeable parts. All parts having the same manufacturer's part number shall be constructed to definite standards, tolerances, and clearances in order that such parts may be completely interchangeable, and may be replaced or adjusted without requiring modification.

3.7 Marking. Each tool shall be marked in a plain and permanent manner with the manufacturer's name, or with a trademark of such known character that the source of manufacture may be readily determined.

3.8 Type I, peavy. The peavy shall consist essentially of a socket, hook, hook bolt, pike, and handle. The construction shall be in accordance with the dimensions of, and similar to figure 1. All parts shall be easily accessible for replacement.

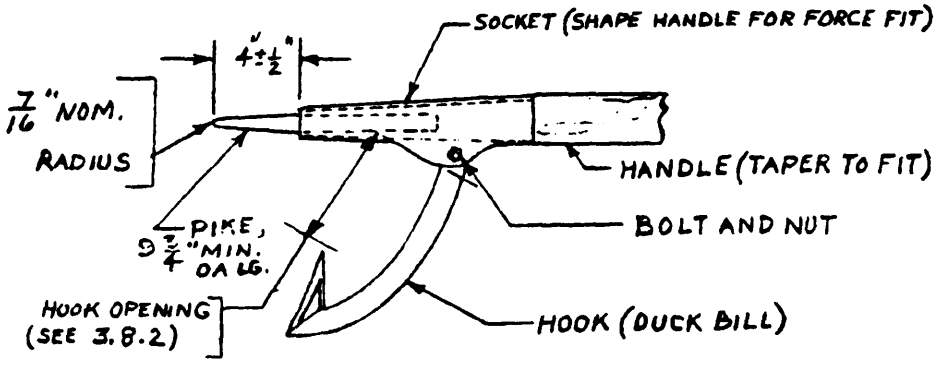


FIGURE 1. Peavy.

3.8.1 Socket. The peavy socket shall be made from either steel, or malleable iron casting at the manufacturer's option.

3.8.2 Hook. Unless otherwise specified (see 6.1), the hook shall be the duck bill type (see figure 1). The hook sizes shall be either 7/8- by 7/16-inch with an 8-inch hook opening, or 1- by 1/2-inch with a 10-1/2-inch hook opening, as specified (see 6.1). Tolerances on hook width and thickness shall be ± 1/16 inch. Material shall be forged from steel bar, SAE 1070 minimum.

3.8.3 Hook bolt. The hook bolt shall be a steel carriage type, size 7/16-14UNC, 1-1/2-inch minimum length, complete with lock nut or lock washer. At assembly the hook shall be securely attached to the socket by the bolt in such a manner that the hook will swing freely.

3.8.4 Pike. The pike shall be forged from steel bar SAE 1070 minimum. The pike shaft shall be firmly embedded in the handle before the handle is shaped to fit the socket. The point shall be radiused as shown in figure 1.

3.8.5 Handle. The handle material shall be as specified in 3.2.1. The diameter shall be 2-1/2 inches ± 1/8 inch at the larger end of the socket, with the tapered portion shaped to fit the socket of the peavy (see figure 1). The overall length shall be 54 inches ± 1 inch, measured from the pike end of the socket.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:38Z
Check the source to verify that this is the current version before use.

3.8.6 Handle preservative. The tapered or socket end, up to and including at least 1 inch beyond the length of the socket, shall be dipped in a wood preservative in accordance with composition "A" of TT-W-572, or at the manufacturer's option shall be treated with a good grade of insecticide and fungus preservative. Handle shall be force fitted in the socket under pressure.

3.9 Type II, cant hook. The cant hook shall consist essentially of a hook, hook bolt, extension toe ring, clasp, and handle. The design shall be similar to figure 2, and parts needed shall be easily replaceable.

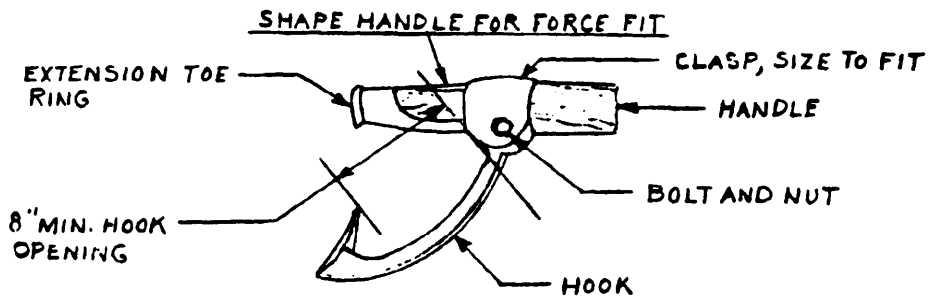


FIGURE 2. Cant hook.

3.9.1 Hook. The hook shall be as specified in 3.8.2.

3.9.2 Hook bolt. The hook bolt shall be as specified in 3.8.3, except the length shall be 1-5/8 inches (minimum).

3.9.3 Extension toe ring. The extension toe ring shall be fabricated from malleable iron, conforming to type "A" of QQ-I-666. The style of bite, and the fastening of the toe ring to the handle, shall be at the manufacturer's option and in accordance with the manufacturer's standard practice.

3.9.4 Clasp. The clasp material shall be as specified in 3.9.3, and tapered to mate with the handle taper. The clasp shall be positioned on the handle above the extension toe ring and securely attached to the handle.

3.9.5 Handle. The handle shall be as specified in 3.2.1, with an overall length of 54 inches, ± 1 inch as measured from the toe ring, and shall be 2-1/2 inches, ± 1/8 inch in diameter at the clasp, tapering toward the extension toe ring.

3.9.6 Handle preservative. The toe ring end of the handle, up to and including the length of the clasp, shall be treated with a wood preservative, as specified in 3.8.6, and fitted into the toe ring extension under pressure.

3.10 Type III, timber carrier. The timber carrier shall consist of a pair of hinged lug hooks, hook bolts, clasp, and swivel, mounted on the center of a wood carrying handle, and shall be suitable for handling timbers from 3 to 16 inches in thickness or diameter, and be similar to figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

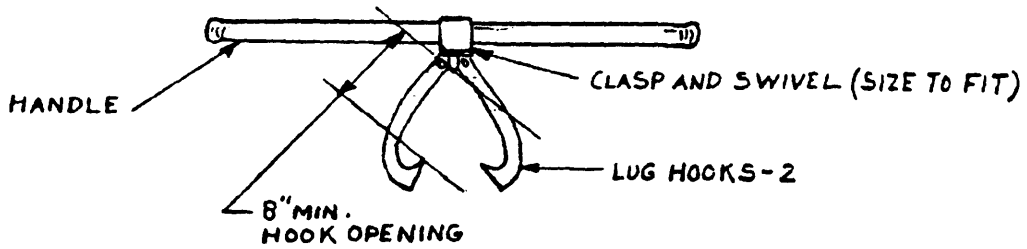


FIGURE 3. Timber carrier.

3.10.1 Lug hooks. The lug hooks shall be as specified in 3.8.2, except the points of the hooks shall be chisel billed, and capable of turning freely in the swivel connection without binding.

3.10.2 Hook bolts. The hook bolts shall be securely attached to the clasp and swivel, and be as specified in 3.8.3.

3.10.3 Clasp and swivel. The clasp and swivel shall be of the material specified in 3.8.1. The upper side of the clasp shall be provided with lugs, bolts, and mating nuts.

3.10.4 Handle. The handle material and finish shall be as specified in 3.2.1 and 3.3. Handle shall be circular in cross section, 48 inches ± 1-inch in length, 2-1/2 inches ± 1/8-inch diameter at the center, and tapered toward each end to a size convenient for a comfortable hand grip. The center of the handle, the length of the clasp, shall be treated with a wood preservative, as specified in 3.8.6, prior to assembling.

3.11 Workmanship. The workmanship shall be of the highest grade throughout, and equal in every respect to the best commercial practice. The tools shall be free from any defects which may affect their durability or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

TABLE I. Sampling data

Category	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual Examination	II	2.5	Defects per 100 units	4.3.1
Dimensional Examination	II	2.5	DO	4.3.2
Testing	S-3	2.5	DO	4.4.1

4.3 Examination.

4.3.1 Visual examination. Each peavy cant hook and timber carrier selected shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking in accordance with table II.

TABLE II. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Finish-Metal Parts	Not free from scale, rust, burrs, fins nodules, cracks, blowholes, or plugging.	X	
	Not coated as specified.		X
Handles	Not species of wood specified.	X	
	Not finished as specified.		X
	Lack of preservation applied to handle prior to fitting extension tow rings, clasps and sockets.	X	
Design and Construction	Clasp, pike, socket, hook, or swivel connection, fractured, split, sprung, malformed, dented, broken, or otherwise impaired.	X	
	Loose or not proper alignment.	X	
	Not connected or joined as specified.	X	
	Not in accordance with the material specified.	X	
Bolts, Nuts and Washers	Missing, broken, stripped, or fractured.	X	
Assembly	Unit not properly assembled or secured or does not function as required.	X	
	Unit is perceptibly out of alignment.	X	
Marking Identification	Missing, incomplete, not legible, not permanent, or not as specified.		X

4.3.2 Dimensional examination. Each unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

4.4.1 Hardness test. Testing shall be accomplished in accordance with method 243.1 of the Federal Test Method Std. No. 151.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packing, and marking. The peavys, cant hooks, and timber carriers shall be preserved, packed, and container marked in accordance with PPP-P-40 for these particular items.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2.1).
(c) Size and type of hook required (see 3.8.2 and 3.10.1).
(d) If other than specified handle material required (see 3.2.1).

6.2 Supersession data. When finalized and coordinated, this specification is intended to supersede Federal Specification GGG-P-151a, Military Specification MIL-H-20638A, and Military Specification MIL-C-426A as follows:

This specification	Federal specification	Military specification
Type I. Peavy	GGG-P-151a	
Type II. Cant hook		MIL-H-20638A
Type III. Timber carrier		MIL-C-426A

GSA DC 71-10297

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.