GGG-R-200b
November 16, 1965

SUPERSEDING
Int. Fed. Spec. GGG-R-00200a (GSA-FSS)
December 6, 1963

FEDERAL SPECIFICATION

REMOVAL TOOL, OIL FILTER

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. The oil filter removal tools covered by this specification are used for removing disposable oil filters from automotive vehicles.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types.* The oil filter tools covered by this specification shall be of the following types, as specified (see 6.1):

Type I—End gripping.
Type II—Body gripping.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools, Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Identification marking. Each removal tool shall be marked in a legible and permanent manner with the manufacturer's

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

name or trademark of such known character that the source of manufacture can be readily determined.

3.2 **Finish.** The ferrous metal components shall be plated, phosphate coated, or oxidized coated so as to provide good corrosion resistance.

3.3 **Design and construction.** Each tool shall be so designed and constructed as to be capable of gripping and removing disposable oil filters having outside diameter within a range of 3-15/32 to 3-3/4 inches. Each type of tool shall be capable of meeting the performance test described in 4.4.1.

3.3.1 *Type I.* The type I removal tool shall be of a clamp design which mounts on the end of the oil filter and its two clamping members shall extend and clamp onto the outside diameter of the oil filter when operated by a wrench. (The wrench is not furnished with the removal tool.) For wrenching purposes, the tool shall be provided with a stud having a hexagonal-shaped head. The hexagonal head shall have a nominal dimension of one inch across the flats and a 1/2-inch female square drive. The portion where the wrench is applied shall be at least 5/8 inch in height. The two clamping members shall be of steel, case hardened or through hardened, at least 1/8-inch in nominal thickness. The tool shall be self-adjusting and self-locking by manipulating the hexagonal headed stud, see figure 1.

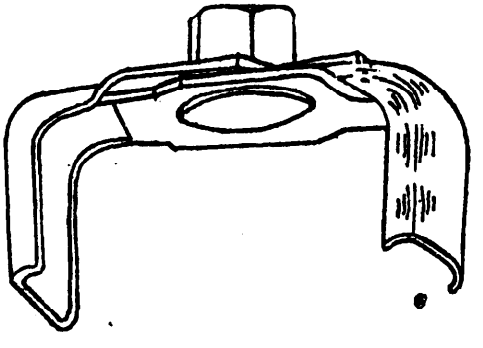


FIGURE 1. Type I, end gripping, oil filter removal tool.

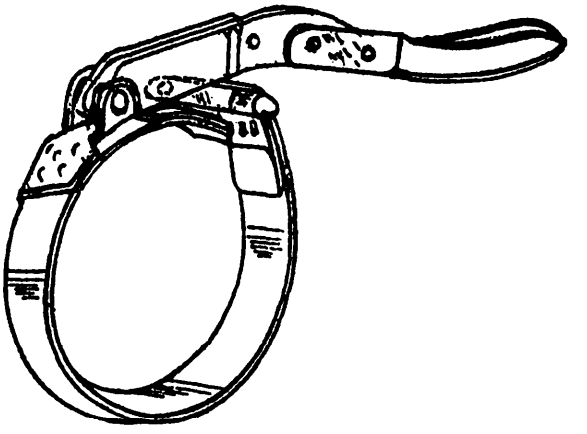


FIGURE 2. Type II, body gripping, oil filter removal tool.

3.3.2 *Type II.* The type II removal tool shall be of the body gripping type. A steel strap, steel band, or similar member or members shall grip the outside diameter of the oil filter, when operated by the handle, which is a component of the tool. When the tool is fastened onto a 3-3/4-inch diameter oil filter, the handle shall extend not less than 7-1/2 nor more than 10 inches measured from the center of the oil filter to the free end of the handle. The tool shall be adjustable and self-locking by manipulating the handle, see figure 2.

3.4 **Illustrations.** The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of removal tools otherwise conforming to this specification.

3.5 **Workmanship.** Workmanship shall be first class in every respect. Burrs and sharp edges which might injure the operator shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the currentversion before use.

own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 **Sampling procedures.** Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

4.3 **Examination.**

4.3.1 *Visual examination.* Each sample unit shall be examined for any nonconformance in design, material, finish, coating construction, workmanship, and marking.

4.3.2 *Dimensional examination.* Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 **Testing.** Each sample unit shall be tested in accordance with 4.4.1.

4.4.1 *Performance.* A torque load of 800 inch-pounds shall be applied to the tool in a manner simulating the removal of a disposable oil filter (see fig. 3). A piece of 3-inch nominal inside diameter pipe (3-1/2-inch outside diameter) may be used in lieu of an oil filter in conducting the test. A dead weight of 100 pounds suspended 8 inches from the center of the pipe is the equivalent of 800 inch-pounds (see fig. 3).

TABLE I. *Sampling data*

Category	Sample unit	Inspection level	Acceptable quality level	AQL expressed in terms of	Reference
Visual examination	One unit	II	4.0	Defects per 100 units	4.3.1
Dimensional examination	One unit	S-4	1.5	Defects per 100 units	4.3.2
Testing	One unit	S-4	1.0	Percent defective	4.4
Preparation for delivery examination	One container	S-2	4.0	Defects per 100 units	4.5

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:38Z
Check the source to verify that this is the currentversion before use.

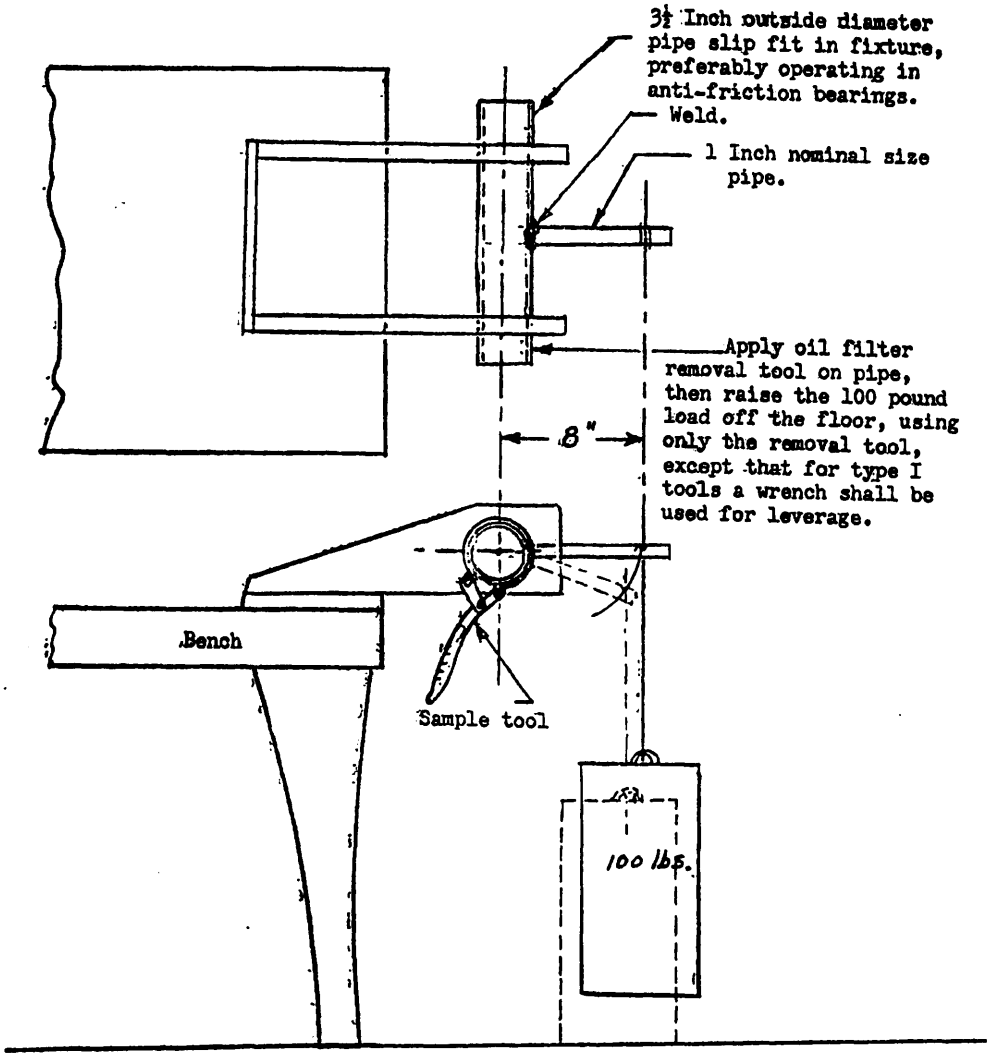


FIGURE 3. Performance test method.

Note. Torque testing equipment, other than that illustrated in figure 3, may be employed provided the 800 inch-pound load is applied in a manner to simulate actual use of the tool.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5. Defects shall be scored in accordance with table II. For examination of interior packaging the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot.

TABLE II. *Classification of preparation for delivery defects*

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible, improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:38Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.)

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.1), the tool shall be preserved, packaged, and packed in accordance with MIL-H-15424. The level of preservation and packaging shall be A or C and the level of packing A, B, or C as specified (see 6.1).

5.1.1 As part of the requirements of section 5, the following is considered as part of table I of MIL-H-15424.

Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6
Removal tool: oil filter, end or body gripping	None	III	1	12	5

5.2 Marking.

5.2.1 *Civil agencies.* In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. Nc. 123.

5.2.2 *Military activities.* In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Type of oil filter removal tool required (see 1.2.1).
(*c*) Level of preservation, packaging, and packing required (see 5.1).
(*d*) Additional marking, if required (see 5.2).

6.2 For civil agency procurements. When level B packaging is required for civil agency procurements, the requirements in 5.1.1, level A packaging shall apply.

6.3 Transportation description. Transportation description and minimum weights applicable to this commodity are:

Rail:
Tools, not otherwise indexed by name. Carload minimum weight 30,000 pounds.

Motor:
Tools, hand, not otherwise indexed. Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

DOD coordination has been waived.

Preparing activity:
GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.