GGG-S-190a
March 12, 1965

SUPERSEDING
Int. Fed. Spec. GGG-S-00190 (GSA-FSS)
December 27, 1963

FEDERAL SPECIFICATION

SEAMER, SHEET METAL, HAND

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope.** This specification covers hand-operated sheet metal seamers used to bend or seam sheet metal.

1.1.1 *Federal specification coverage.* Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Type and styles.* The sheet metal seamers shall be of one type and the following styles, as specified (see 6.1):

Style A—Without depth gauge
Style B—With adjustable depth gauge

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specification:

PPP-B-636—Box, Fiberboard.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-H-15424—Hand Tools; Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are for the convenience of identification and are not intended to preclude the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

purchase of seamers which are otherwise in accordance with this specification.

3.2 Material. The material used in the manufacture of seamers shall be hot forged from carbon steel having not less than 0.43 percent carbon content.

3.3 Handles. Handles of seamers shall be so shaped as to afford a comfortable grip and shall be free from rough edges and sharp corners. Inner handle surfaces adjacent to the joint shall be well rounded or beveled so as to prevent accidental pinching of the hands. Handles shall be designed and constructed to withstand the handle-load test as specified in 4.5.1.

3.4 Finish. Unless otherwise specified (see 6.2), the seamers shall be finished in accordance with the manufacturer's standard practice.

3.5 Marking. The seamers shall be marked in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.6 Style A, without depth gauge. Style A seamers shall be capable of firmly gripping sheet metal along the full width of the jaw. When the seamer is in a closed position, the jaws shall contact each other only at their outermost tips.

3.6.1 Style A seamers shall conform to the applicable requirements of table I and shall be similar to figure 1.

TABLE I.

Style	Length overall ±1/2 in.	Depth of jaw ±1/8 in.	Width of jaw ±1/8 in.	Range of adjustable depth setting
	Inches	*Inches*	*Inches*	*Inches*
A	8-1/4	1	3-1/2	Not applicable
B	8-1/4	1	3-1/2	1/4 to 1

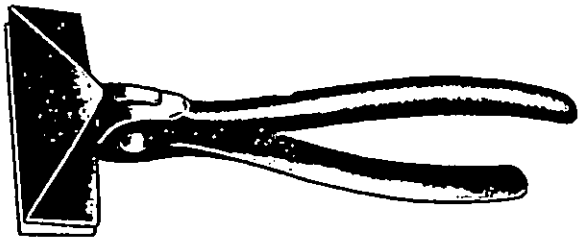


FIGURE 1. Style A, without depth gauge.

3.7 Style B, with adjustable depth gauge. Style B seamers shall conform to the requirements of 3.6 except style B seamers shall be equipped with an adjustable depth setting gauge. This depth setting gauge shall consist of two adjusting screws, with locknuts or an equally effective device whereby the depth of the seam or bend may be regulated.

3.7.1 Style B seamers shall conform to the applicable requirements of table I and shall be similar to figure 2.

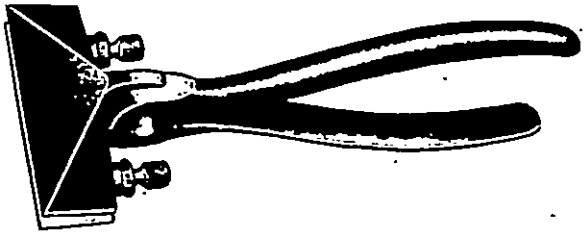


FIGURE 2. Style B, with depth gauge.

3.8 Workmanship. Workmanship shall be of the highest grade throughout and equal in every respect to good commercial practice. The seamers shall be free from rust, burrs, fins, or any imperfections which may impair their serviceability or durability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for lot acceptance.

4.2.1 *Lot.* All seamers of the same style submitted for acceptance at one time shall be considered a lot for purposes of inspection.

4.2.2 *Sampling for examination.* A random sample shall be selected from each lot for examination in accordance with MIL-STD-105 at inspection level II. The acceptable quality level (AQL) shall be 4.0 percent defective.

4.2.3 *Sampling for acceptance tests.* A random sample shall be selected from each lot for acceptance tests in accordance with MIL-STD-105 at inspection level S-3. The AQL shall be 2.5 percent defective.

4.3 Inspection. Each of the sample seamers selected in accordance with 4.2.2 shall be visually and dimensionally examined to determine compliance with this specification. Any seamer in the sample containing one or more defects shall be rejected and if the number of defective seamers in any sample exceeds the acceptance number for that sample, the lot represented by that sample shall be rejected.

4.4 Acceptance tests. Each sample seamer selected in accordance with 4.2.3 shall be tested in accordance with 4.5 to verify compliance with this specification. Any seamer in the sample which does not meet the requirements for any of these tests shall be rejected and if the number of nonconforming seamers exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.5 Test procedures.

4.5.1 *Handle-load test.* Each seamer under test shall be supported in a manner suitable for applying a load of 250 inch-pounds. The load shall be applied at the point of maximum handle curvature (the center of the bow). The actual load applied to the handle shall be calculated by dividing the 250 inch-pounds by the distance between the center of the rivet and the point of load application. If the permanent set is in excess of 1/16 inch, or if the rivet or any other part shows signs of weakness or damage, the sample shall be considered to have failed.

5. PREPARATION FOR DELIVERY

(For civil agency procurement, the definitions and application of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.

5.1 Packaging. Packaging shall be level A or C as specified, (see 6.1).

5.1.1 *Level A.* Seamers shall be cleaned, preserved, and packaged in accordance with MIL-H-15424.

5.1.2 *Level C.* Seamers shall be packaged in accordance with the supplier's commercial practice.

5.2 Packing. Packing shall be level A, B, or C as specified, (see 6.1).

5.2.1 *Level A.* Seamers shall be packed in accordance with level A requirements of MIL-H-15424.

5.2.2 *Level B.* Seamers packaged as specified in 5.1.2 shall be packed in snug-fitting fiberboard boxes conforming to PPP-B-636, type CF, class domestic, style RSC in quantities as specified in MIL-H-15424, for Shears, Tinner.

5.2.3 *Level C.* Seamers shall be packed in containers of the type, size, and kind commonly used for the purpose in a manner that will insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with rules and regulations applicable to the mode of transportation.

5.3 *Marking.*

5.3.1 *Civil agencies.* In addition to any special markings required by the contract or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

order (see 6.1), the unit and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Militiary activities.* In addition to any special markings required by the contract or order (see 6.1), the unit and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Style of seamer required (see 1.2.1).

(*c*) Finish, if other than the standard finish of the manufacturer is required (see 3.4).

(*d*) Level of packaging and packing required (see 5.1 and 5.2).

(*e*) Any special marking required (see 5.3).

6.2 **For civil agency procurements.** When level B packaging is required for civil agency procurements, the requirements in 5.1.1, level A packaging shall apply.

6.3 **Transportation description.** The applicable transportation description, truckload and carload weights are as follows:

Mechanics' hand tools, not otherwise indexed by name.

In barrels, boxes or packages, 996 of Consolidated Freight Classification.

Carload weight 30,000 pounds.

In barrels or boxes.

Truckload weight 30,000 pounds.

DOD coordination has been waived.

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.