GGG-W-181a
DECEMBER 9, 1953
SUPERSEDING
GGG-W-181 (Navy Ships)
1 October 1951

FEDERAL SPECIFICATION

WEDGES, TOOL HANDLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification covers requirements for steel and wood wedges for securing tool handles in striking tools, such as axes, hammers, and hatchets.

1.1.1 *Federal specification coverage.*—This specification covers only the types and sizes of the commodity generally purchased by the Federal Government, and does not include all types and sizes which are commercially available.

1.2 Classification.—Tool-handle wedges shall be of the following types as specified (see 6.1):

Type I.—Steel.
Type II.—Wood.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications.—There are no other specifications applicable to this specification except those referenced in section 7 by individual departments.

(Copies of Federal Specifications and the Index of Federal Specifications and Standards may be obtained upon application accompanied by check, money order, cash, or Government Printing Office coupons, to the General Services Administration, Business Service Center, Region 3, Seventh and D Streets SW., Washington 25, D. C. This office will also honor deposit account numbers issued by the Government Printing Office. Prices may be obtained from the Index of Federal Specifications and Standards or from the GSA Regional Offices. Single copies of this specification and other product specifications required for bidding purposes are available without charge at the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.)

2.2 Standards.—The following standard, of the issue in effect on date of invitation for bids, forms a part of this specification:

Military Standard:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military standard referenced above required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Type I, steel.—Type I wedges shall be forged of carbon steel and shall be ribbed or corrugated. The ribs or corrugations shall run in a horizontal or diagonal direction. The convex end of the steel wedge shall have a slighty blunt edge to prevent splitting action of the tool handle.

3.1.1 *Finish.*—Unless otherwise specified (see 6.1), all surfaces shall be plated, painted, or lacquered, or shall be provided with a chemically produced oxide finish suitable for preventing corrosion under ordinary storage conditions.

3.1.2 *Dimensions.*—Type I wedges shall conform to the dimensions shown in table I, and be similar to figure 1.

TABLE I.—*Dimensions for type I, steel wedges*

Thickness ±1/32	Width ±1/32	Length ±1/16
Inch	*Inches*	*Inches*
1/4	9/16	1 3/16
5/16	5/8	1 1/4
3/8	11/16	1 3/16
7/16	3/4	1 5/16
1/2	1/2	1 3/8
9/16	9/16	1 5/16
5/8	1 3/16	1 1/2
11/16	1 5/16	1 1/2
3/4	1/2	1 1/2
1/2	3/4	1 1/2
1/4	1 3/8	1 1 3/16
3/4	1 1/2	1 1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

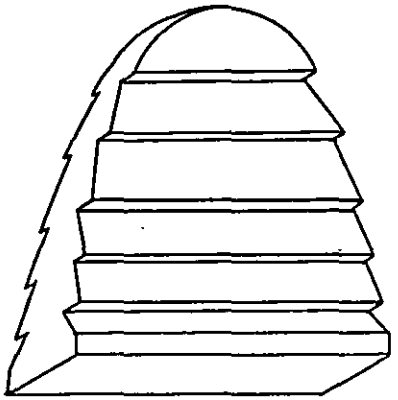


FIGURE 1.—Type I wedges.

3.2 Type II, wood.—Type II wedges shall be of dense heartwood of the following dry hardwoods: true or pecan hickory, beech, oak, yellow birch, dogwood, persimmon, or hard maple. The wood shall be free of decay, splits, checks, shakes, holes, and knots. The slope of the grain shall not exceed 1 in 15, and the moisture content not to exceed 12 percent.

3.2.1 *Dimensions.*—Type II wedges shall conform to the dimensions shown in table II, and be similar to figure 2.

TABLE II.—*Dimensions for type II, wood wedges*

Thickness A ± 1/32	Width B ± 1/32	Length C ± 1/16	Wedge angle D
Inch	*Inches*	*Inches*	*Degrees*
5/16	1 1/16	2	10
5/16	2 3/16	2 1/2	6

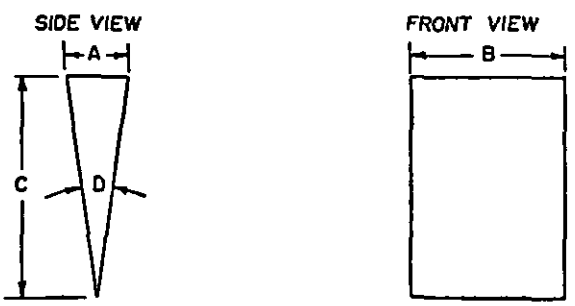


FIGURE 2.—Type II wedges.

3.3 Marking.—Wedges shall be marked in a plain and permanent manner with the manufacturer's name or trade-mark of such known character that the source of manufacture can be readily determined.

3.4 Workmanship.—Workmanship shall be first class. Wedges shall be free of any imperfections, burrs or defects of any nature which may affect the serviceability or the safety of the user.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling for lot acceptance.

4.1.1 *Inspection lot.*—All tool-handle wedges of the same size and type presented at one time shall be considered a lot for purposes of acceptance inspection and tests.

4.1.2 *Sampling for inspection.*

4.1.2.1 *Sampling for intermittent procurement in isolated lots.*—A random sample of tool-handle wedges shall be selected as specified in table III from each inspection lot of material offered for Government inspection of visual and dimensional characteristics with lot acceptance based on the sampling-inspection requirements in accordance with the procedures of Military Standard MIL–STD–105.

TABLE III.—*Sampling for visual and dimensional inspection A. Q. L. (approx.)=1.5 percent defective*

Number of tool-handle wedges in an inspection lot	Number of tool-handle wedges in sample	Acceptance number (defectives)	Rejection number (defectives)
15 and under	7	0	1
16 to 40	10	0	1
41 to 110	15	0	1
111 to 300	25	1	2
301 to 500	35	1	2
501 to 800	50	2	3
801 to 1,300	75	3	4
1,301 and over	110	4	5

NOTE.—The Government inspector may institute tightened or reduced inspection in accordance with section 9 of Military Standard MIL–STD–105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

4.1.2.2 *Sampling for continuous production.*—Where there is continuous production for the Government and inspection lots include at least 200 items, sampling for Government inspection shall be conducted in accordance with Military Standard MIL-STD-105 at inspection level I and A. Q. L.=1.5 percent defective: the type of sampling (single, double, or multiple) to be determined by the Government inspector.

4.2 Inspection.

4.2.1 *Visual and dimensional inspection.*—Each of the sample tool-handle wedges selected in accordance with table III shall be visually and dimensionally inspected by the Government inspector to verify compliance with this specification. Any tool-handle wedge in the sample containing one or more visual or dimensional defects shall be rejected, and if the number of defective tool-handle wedges in any sample exceed the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.2.2 *Rejected lots.*—Rejected lots may be offered again for Government inspection provided the contractor has repaired or removed all nonconforming tool-handle wedges. The Government inspector shall again select and examine samples from such resubmitted lots to verify compliance with the specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Preservation.—Cleaning and preservation shall be in accordance with the manufacturer's standard practice.

5.2 Packaging.—Commercial packages will be acceptable.

5.3 Packing.—The equipment shall be packed in substantial commercial containers of the type, size and kind commonly used for the purpose in such manner as to insure acceptance and safe delivery to the designated point by common or other carrier at the lowest rate of the carrier.

5.4 Marking.

5.4.1 *Interior containers.*—Packages and interior containers shall be marked with the name of the material and the name of the contractor, or trade-mark of such known character that the source of supply may readily be determined.

5.4.2 *Exterior containers.*—Shipping containers shall be marked with the name of the item, the type, and the quantity therein, as defined by the contract or order under which shipment is made. the name of the contractor, and the number of the contract or order.

6. NOTES

6.1 Ordering data.—Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and size of tool-handle wedge required (see 1.2, 3.1.2 and 3 2.1).
(c) Finish, if other than as specified in 3.1.1.
(d) Quantity.
(e) Whether preparation for domestic or overseas shipment is required (see sec. 5 and 7.2.3).

6.2 The illustrations contained herein are descriptive and not restrictive, and are not intended to preclude the purchase of tool-handle wedges otherwise conforming to this specification.

6.3 Transportation description.—Transportation description applicable to these items is:

Wedges, not otherwise indexed by name, iron.

Carload weight 36,000 pounds.

Truckload weight 36,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specification and standard, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments:

7.2 Army, Navy, and Air Force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.

7.2.1 *Applicable specifications and standards.*

Military Specification:

MIL-P-15424—Packaging of Hand Tools; General Specification for Domestic and Overseas Preservation.

Military Standard:

MIL-STD-130—Identification Marking of U. S. Military Property.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.2.2 *Marking for identification.*—In addition to the marking specified in 3.3, wedges shall be marked in accordance with Military Standard MIL-STD-130.

7.2.3 *Preparation for delivery.*—Tool-handle wedges shall be cleaned, preserved, packaged, packed, and marked in accordance with Military Specification MIL-P-15424. The nomenclature shall be as follows:

Wedges, tool handle.

MILITARY INTERESTS:

Army—E O Q T
Navy—Sh Y
Air Force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:38Z
Check the source to verify that this is the current version before use.