INCH-POUND

MIL-DTL-32019(MC)
13 January 1998

DETAIL SPECIFICATION

BOAT CLOAK - MENS' DRESS (OFFICER'S)

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers the requirements for a dark blue boat cloak.

1.2. Classification. The cloak will be one type of the following sizes as specified (see 6.2).

Schedule of Sizes

Small	Medium	Large	Extra Large
34-36	38-40	42-44	46-48

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commander (PSE-D), Marine Corps Systems Command, Quantico, VA 22134-5010 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1. General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2. Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50186	- Cloth, Buckram, Woven and Nonwoven
A-A-50196	- Thread, Silk
A-A-50198	- Thread, Gimp, Cotton, Buttonhole
A-A-52094	- Thread, Cotton
A-A-52106	- Cloth, Twill or Plain Weave, Polyester and Polyester Blend
A-A-55187	- Braid, Textile (Flat)
V-B-871	- Button, Sewing Hole and Button Staple (Plastic)
DDD-L-20	- Label: For Clothing, Equipage, and Tentage (General Use)

DEPARTMENT OF DEFENSE

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill Rayon
MIL-C-29405	- Cloth, Broadcloth: Wool and Wool/Nylon

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3. Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

Department of Defense (DoD) Standard Shades for Buttons 1966

Department of Defense (DoD) Standard Color Card of Official Standardized Shades for Sewing Threads 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 409 W. 44th Street, New York, NY 10016-0927.)

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Application for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

2.4. Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1. Standard sample. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2. First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

3.3. Materials.

3.3.1 Basic material. The basic material shall be cloth, broadcloth, wool, 14 oz, dark blue, shade 2307, conforming to type I of MIL-C-29405.

3.3.2 Lining. The material for lining the cloak shall be cloth, broadcloth, wool, 14 oz, scarlet, shade 2501, conforming to type I of MIL-C-29405.

3.3.3 Interlining. The material for lining the collar and pocket stays shall be cloth, stain, rayon, scarlet, shade 2504, conforming to class 1 of MIL-C-368.

3.3.4 Collar. The outer ply of the collar shall be made from a good commercial grade of black velvet cloth.

3.3.5 Pocketing. The material for pocketing shall be cloth, twill, polyester and cotton, conforming to class 1 of A-A-52106. The color shall be black.

3.3.6 Braid. The braid for trimming the front edges and bottom of the cloak shall be 2x2 plain weave, flat, mohair and nylon, 1/2 inch wide, conforming to type II, class 1 of A-A-55187. The color shall be black.

3.3.7 Buttons. The four buttons for the front closure shall be melamine, formaldehyde composition, glossy finish, conforming to type II, class D, style 20, 30 line. The color shall be black.

3.3.8 Buckram. The buckram for interlining the collar shall conform to type IV of A-A-50186 with a weight of 21-23 oz per square yard.

3.3.9 Interlining. The collar interlining shall be cloth, polyester and cotton, conforming to class 1 of A-A-52106.

3.3.10 Hook and eye. The hook and eye for closing the collar shall be brass, black japanned finish or black chemical finish coated with a clear lacquer coating and conform to the requirements of Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

3.3.11 Agraffe cord. Each boat cloak shall have a black agraffe cord consisting of a double cord with three knots, two sliders, and two frogs (see Figure 2).

3.3.12 Thread.

3.3.12.1.Cotton thread. The thread for all inside seaming and stitching shall be mercerized finish, ticket No. A, 3-ply, conforming to A-A-52094.

3.3.12.2.Silk thread. The thread for machine sewing all outside seaming and stitching shall be ticket No. A, with ticket No. B, and ticket No. F for buttonhole, needle and looper threads, respectively, conforming to A-A-50196. The thread for hand sewing shall be type III, ticket No. C, 2-ply, conforming to A-A-50196.

3.3.13 Color and colorfastness. All thread for outside stitching shall be black, shade AA, cable No. 66043. The thread for inside stitching shall be scarlet, shade W, cable No. 66040 (see DoD Standard Color Card of Sewing Threads 1968). The threads shall show good fastness to wet (dry) cleaning.

3.3.14 Gimp. The buttonhole gimp shall be cotton, ticket No. 8, soft or glazed finish, conforming to type I or II of A-A-50198. The color shall be scarlet, shade W, cable No. 66040, and show good fastness to wet (dry) cleaning.

3.3.15 Labels. Each cloak shall have a combination instruction/ identification label and a size label as follows. The cloak is intended to be wet (dry) cleaned and the labels shall show good fastness to this cleaning process.

3.3.15.1.Combination personal-clothing identification label. The combination label shall conform to type IV, classes 1 and 3 of DDD-L-20 with printing to be a minimum 10 point (approximately 1/8 inch). The content and format shall be as follows:

Nomenclature:
Name of contractor:
Wool Products Act information:
DRY CLEAN ONLY

3.3.15.2.Size label. The size label shall conform to type VI, class 2 of DDD-L-20. The label shall consist of the numerical

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

size designation specified in 1.2 followed by the letter S, M, L, or EL, for Small, Medium, Large, and Extra Large, as shown by the following example:

35 S

3.4. Design. The boat cloak shall be the U.S. Marine Corps design shown on Figures 3 through 5, a four button front closure fly with hook and eye collar closure, one inside pocket with the front edges and bottom trimmed with braid and an agraffe cord with frogs across the upper front.

3.5. Patterns. The standard patterns furnished by the Government shall not be changed in any manner and shall be used as a guide in cutting the contractors working patterns. The standard patterns provide a 1/2 inch allowance for center back seam and a 1/4 inch allowance for front and collar edges. The patterns show size, are marked for placement and cutting, and are notched for proper assembly of component parts.

3.5.1 List of pattern parts. The cloak shall be cut from the materials specified herein in accordance with pattern parts indicated below:

ITEM	PATTERN NOMENCLATURE	NO. OF CUT PARTS
	Material: Cloth broadcloth, wool	
1	Left (black)	1
2	Right (black)	1
3	Under collar (black)	1
4	Collar stand (black)	1
5	Lining, left (scarlet)	1
6	Lining, right (scarlet)	1
	Material: Cloth, rayon, lining	
7	Collar stand (scarlet)	1
8	Buttonhole/front fly (black and scarlet)	1 each
	Material: Cloth, twill, polyester and cotton	
9	Breast pocket	2
10	Under collar interlining	1
11	Front interlining	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

ITEM	PATTERN NOMENCLATURE	NO. OF CUT PARTS
	Material: Cloth, buckram	
12	Collar stand	1
	Material: Cloth, velvet	
13	Collar, top ply	1
	Marker	
14	Buttonhole	
	Shaper	
15	Under collar	

3.6. Construction. The cloaks shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I. The contractor is not required to follow the exact sequence of the operations as listed, but all operations specified will be used to manufacture the cloaks.

3.6.1 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted. All overedge stitching shall be done on serging machines with a knife attachment properly set to trim the raw edge without cutting the material.

3.6.1.1. Tacking and back stitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitchings shall be backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch.

3.6.2 Shade marking. The component parts of the cloaks cut from one piece of basic and lining material shall be shade marked to ensure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on shade tickets.
c. Adhesive type tickets where adhesive mass adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
1	Cutting. a. Cut all materials in the direction indicated by the directional lines on the patterns, which is the warp direction. b. Cut all wool parts from one piece of basic material. c. Cut the collar stand lining from one piece of rayon lining material. d. Cut the collar stand interlining from one piece of polyester/cotton twill material. e. Cut the collar stand interlining from one piece of buckram material.					
2	Replacement of damaged parts. a. Replace at time of cutting any part containing damages, such as holes or seriously weakening defects, such as smashes, multiple floats, and slubs likely to develop into holes. b. Replace all parts damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, holes, mends or burns.					
3	Shade marking. a. Mark all component parts cut from one piece of basic and lining fabrics to ensure uniform shade and size throughout the cloak.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
4	Make collar stand (see Figure 6).					
	Finished appearance. The polyester/ cotton material shall finish on the lining side of the collar stand. The collar stand shall be smooth and flat and shall be uniformly stitched without twists, gathers, puckers or pleats.					
	a. The collar stand shall be made from one ply each of basic material, polyester/cotton and buckram and rayon lining.					
	b. Position the polyester/cotton on the collar stand interlining with the edges even. Seam the two plies 1/8 to 3/16 inch from top and bottom edges and each end.	301	SSa-1	10-14	A (cotton)	A (cotton)
	c. Lap the lower edge of polyester/ cotton side of stand approximately 1/2 inch on lower inside edge of stand outer ply. The outer ply shall extend not less than 1 inch beyond the ends of the interlining. Seam interlining to outer ply 1/4 inch from lower edge of interlining.	301	LSa-1	10-14	A (cotton)	A (cotton)
	d. Fold lower edge of outer ply smoothly over the lower edge of interlining. Seam the interlining to outer ply 1/4 inch from upper edge of interlining.	301	SSbd-1	10-14	A (cotton)	A (cotton)
	e. Trim upper edge of stand outer ply to within 1/2 inch from upper edge of stand interlining.					
	f. Smoothly fold the ends of the outer ply over the ends of the interlining; turn under lower edge sufficiently so as not to be visible in the finished stand. Tack the raw end and lower folded end of the outer ply to the turned-under position of the outer ply and polyester/cotton with overcast stitching.	Hand		2-3	C (silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
5	Make collar.					
	Finished appearance. The collar shall be uniform in appearance, shall be smooth and flat and shall be uniformly stitched without twists, gathers, puckers or pleats.					
	a. The collar shall consist of the velvet outer ply and shall be interlined with one ply of cotton warp and spun hair-wool filling material.					
	b. Position the interlining material on the inside of the under collar with all edges even. The interlining and under collar shall be padded with four to six rows of blind stitching with fullness on interlining between the row of stitching to roll collar.	103	SSm-6	4-6	A (cotton)	
	c. Position the top collar on the outside of under collar with edges even. Seam top collar to under collar 3/16 to 1/4 inch from ends and top edge.	301	SSe-2 (a)	10-14	A (cotton)	A (cotton)
	d. Turn the collar, working the corners and seam out to the edges and baste along the seamed edges.	101 or Hand				
	e. Edgestitch the collar uniformly 3/18 inch from seamed edges. Continue the stitching 3/16 to 1/4 inch along the raw edge of collar.	301	SSe-2 (b) (seamed edges) SSa-1 (raw edges)	10-14	A (silk)	A (silk)
	f. Press the collar smooth paying particular attention to the velvet collar so as to not crush or damage the finished appearance. If a utility press is used, recommend a piece of velvet be used in a face down position over the collar to interlock the nap.					
6	Join collar to collar stand.					
	a. Position collar and collar stand together with raw edges even. Join collar to stand with 3/8 inch seam.	301	LSq-2 (a)	10-14	A (cotton)	A (cotton)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
7	Join collar stand lining to collar and collar stand.					
	a. Position collar stand lining, collar and collar stand together with raw edges even and ends of the lining extending not less than 1 inch beyond ends of collar stand.					
	b. Join collar stand lining to seam allowance for collar stand outer ply and collar with 1/4 inch seam.	301	LSq-2 (a)	10-14	A (cotton)	A (cotton)
8	Topstitch and edgestich collar stand.					
	Finished appearance. The collar stand shall be uniformly stitched without twists, gathers, puckers or pleats.					
	a. Edgestitch ends of collar stand 1/8 inch from folded end. Continue to topstitch along upper edge of collar stand 3/16 inch from raised edge, with the seam allowance of the collar, collar stand and lining turned down toward the neck edge of the collar stand and caught in the stitching.	301	EFa-1 (collar stand ends) LSq-2 (top edge of collar stand)	12-16	A (silk)	A (silk)
	b. Crease the upper edge of collar along the top edge of the collar stand smooth and flat with a heated pressing iron or pressing machine. Do not crush or damage the velvet.					
9	Make front interlining.					
	a. The interlining for the fronts shall consist of a body and chest piece cut from cotton warp and spun hair-wool cloth and upper front corner reinforcement pieces cut from hair-wool cloth.					
	b. Position the corner reinforcement pieces between the body and chest components with raw edges even at the front and gorge edges. Quilt all components together with 10-12 vertical rows of zig-zag stitching approximately 1/2 inch apart and extending from top to bottom edge of chest piece.	301	SSv	4-6	A (cotton)	A (cotton)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
10	Interline front parts.					
	a. Position the left and right front parts on the respective front interlinings with upper and front edges even.					
	b. Baste front part of interlining along the vertical center, distributing the fullness over the breast area. The basting shall extend from approximately 2 to 2-1/2 inches from shoulder edge of fronts to approximately 1-1/2 inches from bottom edge. Baste diagonally along shoulder edge, gorge front, and back edges.	301 or Hand	Hopper		commer-cial	commer-cial
	c. Trim front edge of interlining 1/4 inch back from front edge of front parts and trim even along the gorge. Trim the bottom edge of interlining in line with the bottom notch of cloak.					
11	Make fly front on left side.					
	a. Attach the scarlet and black fly front lining parts to the respective fronts with a 3/8 inch seam from the neck opening to the bottom of the fly front. Turn the lining to the underside of both fabrics and topstitch the turned in lining 1/4 inch from the turned edges. The back edges of fly lining shall be joined with a 3/8 inch seam after the scarlet broadcloth lining is joined to the front.	301	SSa-1	10-14	A	A
12	Make buttonholes.					
	a. Make four cut first square-bar type buttonholes 1-1/4 inch long, 3/4 inch in from the edge of the front lining using the marker provided for proper placement.					
13	Join back parts.					
	Finished appearance. The back parts shall be joined without twists, gathers, puckers or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
13	Join back parts. (cont'd)					
	a. Position the back parts face to face with edges even and join at the center with 1/2 inch seam.	301	SSa-1	10-14	A (cotton)	A (cotton)
14	Press back seam.					
	a. Spread open the shoulder and back seams and press smooth and flat with a heated pressing iron.					
	b. Tack shoulder edge of interlining to back seam allowance.	301 or Hand	SSa-1	6-8 4-8	A (cotton)	A (cotton)
15	Assemble inside pocket on right side of lining.					
	a. The inside pocket shall be made of polyester/cotton twill cloth, and two facings of rayon scarlet lining at the double piped pocket opening.					
	b. Position the rayon facings on the side edges of the polyester/cotton pocket parts and seam the turned in edges to the pocketing 1/16 to 1/8 inch from folded edges.	301	SSa-1	10-14	A	A
	c. Mark the right front lining with the furnished pocket marker for the position of the pocket opening.					
	d. Position the pocket at the mark with the pocket facing next to the lining material. Place polyester/ cotton twill stay piece on the underside of the lining.					
	e. Stitch the pocket parts to the lining through the stay piece with one row of stitches 3/16 to 1/4 inch on each side of the mark for the pocket opening.	301	SSv-2	10-14	A	A
	f. Cut the opening for the pocket midway between the two rows of stitches joining the pocket and pocket stay to the lining, tongue notching the ends of the opening.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
15	Assemble inside pocket on right side of lining. (cont'd)					
	g. Turn the pocket through the opening to the inside with the front and back of the pocket to the front and side edges, respectively, of the lining. Form the piping at the left and right edge of the opening. Topstitch the front and back edges of the pocket opening adjacent to the seamed outer edges of the piping.	301	BSp-2	10-14	A	A
	h. The pocket opening may be accomplished with the use of a double piped pocket machine; which stitches, cuts and turns in one operation.					
16	Assemble body lining.					
	a. Position lining with edges even and join at the center back with a 1/2 inch seam.	301	SSa-1	10-14	A (cotton) (scar-let)	A (cotton) (scar-let)
17	Sew on identification label.					
	Finished appearance. The label shall be centered on the lining at the center back seam, with the top edge 2 inches below the collar seam.					
	a. Sew the label to the lining 1/16 inch from each edge.	301	SSa-1	10-14	A (cotton)	A (cotton)
18	Mark for bottom turnup.					
	a. Mark the cloak 1-1/4 inch from the bottom edge for the turnup.					
19	Join lining assembly to bottom edge.					
	a. Position the bottom edge of lining and cloak with all edges even.					
	b. Join the bottom edges with a 1/4 inch seam.	301	SSa-1	10-14	A (cotton) (black)	A (cotton) (black)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
20	Fold and stitch turnup.					
	a. Turn up bottom corner edges of assembly at the notches. Stitch bottom turnup 3/16 inch from the front edges, catching the lining in the stitching. The stitching extends the width of the turnup.	301	SSa-1	10-14	A (cotton) (black)	A (cotton) (black)
21	Join lining to fronts with tape.					
	a. Baste the lining to the cloak along the front edges.	301 or Hopper			commer-cial	commer-cial
	b. Join the lining to front with a 1/4 inch seam along the front edges with a 3/8 inch wide stay tape positioned on the interlining side of the fronts, 1/8 inch back from raw edge of interlining and caught in the stitching. Continue the stitching to bottom edge of cloak. The tape shall be sewn with slight tension and shall extend from the top edge of cloak to approximately 1-1/2 inches above the bottom edge of cloak.	301	SSab-1	10-14	A (cotton) (black)	A (cotton) (black)
	c. Fell the inner edge of the tape to the front interlining from top to bottom ends.	103	SSm-1	4-6	A (cotton)	
	d. Press the front edges smooth and flat with a heated pressing iron or machine, removing fullness. Remove all basting stitches.					
	e. Spread open the front-body lining seam allowance from top edge of cloak to bottom edge and press smooth and flat with a heated pressing iron.					
22	Baste front edges and bottom turnup.					
	a. Turn the body-lining assembly right side out, working out the corners.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
22	Baste front edges and bottom turnup. (cont'd)					
	b. Baste along the front edges, working the lining 1/16 to 1/8 inch back from the front edges. Turn up the bottom edge of cloak at the mark and continue basting along the bottom edge with the lining 1/2 inch from the bottom edge. The lining at fronts and bottom edge will not be visible from the outside of the cloak.	301 or Hand	Hopper		commer-cial	commer-cial
23	Edgestitich fronts and bottom edges.					
	Finished appearance. The cloak shall be uniformly edgestitched. The lining at the bottom edge of the cloak shall not be caught in the stitching.					
	a. Edgestitch the left and right fronts and bottom uniformly 3/8 inch from the front edges.	301	SSa-2 (fronts)	12-16	A (silk) (black) (scar-let)	A (silk) (black) (scar-let)
	b. Continue the stitching along the bottom edge of cloak.	301	EFa-1 (bottom)	12-16	A (silk) (black)	A (silk) (black)
24	Sew braid on front/bottom edges.					
	Finished appearance. The 1/2 inch braid shall finish smooth and flat having no distortions.					
	a. The braid shall be placed at the edge of the right collar stand and stitched to the finished front edge of the stand to the front corner and down the right side of the front edge across the entire bottom edge and up the left front edge and top corner, stopping at the left edge of the stand. The bottom edge of the lining and fly front shall not be caught in the stitching.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
25	Seam neckline with size label and hanger.					
	Finished appearance. The neckline shall finish smooth and flat without twists, gathers or puckers. The size label shall be positioned between the ends of the hanger. Ends of the hanger shall be positioned so that the opening shall be 2 inches long when measured along the lower edge of collar lining.					
	a. Join the lining to the cloak at the neckline from end to end with a 1/4 inch seam and with the upper edge of the label and ends of the hanger properly positioned and caught in the stitching at inside center back. Also catch in the stitching a 3/8 inch tape across the back of cloak (at the neckline) overlapping the shoulder seams not less than 1 inch.	301	SSab-1 (tape)	10-14	A (cotton)	A (cotton)
26	Set collar.					
	Finished appearance. The collar shall be carefully joined to the cloak without twists, puckers, pleats, raw edges or distortion.					
	a. Mark neckline on the outside 1/2 inch from top edge for positioning the collar.					
	b. Position the collar with the lower edge lapped on the outside top edge of cloak at the mark.					
	c. Seam the collar to the cloak from end to end 1/8 inch from lower edge of collar. The stitching shall not be through the collar lining.	301	LSa-1	12-16	A (silk) (black)	A (silk) (black)
27	Sew hook and eye to collar stand.					
	Finished appearance. The hook and eye shall be positioned to properly engage each other, effecting a flat, smooth closure at the front without a gap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
27	Sew hook and eye to collar stand. (cont'd)					
	a. Position and securely sew the hook to the right end and the eye to the left end of the collar stand.	Hand		10 per hook and eye (min) (silk-double thread) (black)		
28	Sew on buttons.					
	a. Sew four 34-line buttons to the right front to align with the buttonholes on the left front. Buttons shall be shank wrapped to form a stand 1/8 to 3/16 inch in height to accept the buttonhole without distortion.	101 or 301 or Hand		21 per button 6-8 per button doubled	34/4	
29	Finish collar.					
	a. Securely tack the lower corners of the collar stand to the cloak.	Hand		8-10	C (silk) (black)	
	b. Turn under and fell the lower edge of the collar lining to the cloak from end to end.	Hand		8-10	C (silk) (black)	
	c. Turn under the end of lining at right and left ends of the collar stand and position the folded edge of the lining under the hook and eye. Fell the folded end of the collar lining to the end of collar.	Hand		8-10	C (silk) (black)	
	d. Position the collar tab on the inside of the collar stand at the left end, with the tab extending approximately 3/4 inch beyond the front end of the collar stand. Fell the top back and bottom raw edges of tab to collar lining.	Hand		8-10	C (silk) (black)	
30	Clean cloak.					
	a. Pull all basting thread trim and remove any loose ends of thread and remove any spots, stains and tickets without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

TABLE I. Manufacturing requirements - Continued.

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/IN	NDL	BOB/ LPR
31	Press cloak.					
	Finished appearance. The cloaks shall be well pressed throughout with a heated pressing iron or machine of a suitable type to obtain the desired shape and appearance in accordance with good manufacturing practice.					
	a. Press the fronts smooth and flat, straightening and shaping the front edges and working the fullness towards the chest. Care shall be exercised in pressing the fronts so that the bottom edges are even.					
	b. Press the top collar smooth and flat. Do not crush or burn the velvet.					
	c. Press the sides and back smooth and flat.					
	d. Press body lining throughout, removing all wrinkles and creases.					
32	Mark and tack on agraffe cord and frogs.					
	Finished appearance. The cord and frogs shall be securely attached without causing distortion to the fronts. The cord is to be permanently attached to the left side and it buttons over a frog on the right side of the cloak. The center knot of the cord shall be centered with the front opening.					
	a. Mark the left and right fronts 3 inches from the lower edge of the collar stand and 2 inches from the shoulder seam.					
	b. Position the frog with the attached cord to the mark on the left front and tack the under side of the cord to the basic material and interlining only.	Hand		6-8 (double thread)	C (silk) (black)	
	c. Position the unattached frog at the mark on the right side and tack the underside of the frog to the basic material and interlining only.	Hand		6-8 (double thread)	C (silk) (black)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

3.7. Finished measurements. The finished cloak shall conform to the measurements shown in Table II.

TABLE II. Cloak measurements.

Size	Collar length 1/ (inches)	Back length 2/ (inches)
34-36 Small 38-40 Medium 42-44 Large 46-48 Extra Large	18 19 20 21	39 39-1/2 40 40-1/2
Tolerance	± 1/4 inch	± 3/4 inch

1/ Collar stand length measurement shall be taken along the center from end to end.

2/ Back length measurement shall be taken along center back seam from lower edge of collar stand to the finished bottom edge.

3.8. Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

4. VERIFICATION

4.1. Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).

4.2. Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in ANSI/ASQC Z1.4.

4.3. First article inspection. When first article is required, inspection shall be made of a completely fabricated cloak from all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

4.4. Conformance inspection.

4.4.1 Component and material inspection. Components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. The method of testing shall be as specified in FED-STD-191, wherever applicable.

4.4.1.1. Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified.

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

4.4.1.2. In-process inspection. Inspections shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

4.4.2 Examination of the end item. The end item shall be examined for the defects listed in 4.4.2.2 through 4.4.2.5. The sample unit shall be one completely fabricated cloak.

4.4.2.1. Classification of defects. All defects shall be classified as indicated below, except those numbered 1 through 24 in the major classification column, which shall be classified as follows:

Major defect – When seriously affecting appearance or serviceability.

Minor A defect – When not seriously affecting appearance or serviceability.

4.4.2.2. General defects. General defects shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
Cleanness	a. Any spot or stain clearly noticeable. - on outside. - on inside.	101		301
	b. Thread ends not trimmed or loose, threads not removed on major portion of cloak.			302
	c. Two or more shade tickets not removed.			303
Components and assembly	a. Any defective component or defect of assembly (not herein classified).	1		
	b. Any component part or required operation omitted (not herein classified).	2		
Cutting	a. Any component part of wool material not cut in accordance with directional lines on patterns.	102		
	b. Any component part other than wool material not cut in accordance with directional lines on patterns.		201	
Hook and eye	a. Hook and eye omitted.	103		
	b. Not specified type or size.		202	
	c. Hook and eye not securely sewn to ends of collar stand.		203	
	d. Hook or eye positioned other than specified.		204	
Material defects and damages	a. Any weakening defect, such as smash, multiple float, loose slub, etc., that may develop into a hole.	3		
	b. Any hole.	4		
Material defects and damages (cont'd)	c. Shade bar, slub, knot, etc., affecting appearance: - on outside. - on inside.	5	205	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
	d. Scissors or knife cut, tear, mend or burn.	6		
	e. Needle chew that may develop into a hole.	7		
	f. Exposed drill hole.	8		

NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition is one which definitely weakens the fabric or when it is so conspicuously located as to be clearly noticeable. Weakening or nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:

Material defect – No defect
Workmanship damages – Minor B defect

Pressing	a. Burned or scorched.	9		
	b. Poorly pressed.		206	
	c. Basting, or pressing impressions, not removed on major portion of cloak affecting appearance.			304
	d. Edges bulky, i.e., not pressed solid, affecting appearance.		207	
	e. Body lining not smoothly pressed.			305
	f. Seams not pressed open.		208	
	g. Upper edge of collar along top edge of collar stand not crease pressed as specified.		209	
Seams and stitching	a. Accuracy of seaming:			
	1. Seam twisted, puckered or pleated affecting appearance.		210	
Seams and stitching (cont'd)	2. Part of garment caught in any unrelated operation or stitching.	10		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
	3. Unsightly hand felling or blind stitching exposed and visible on outside, affecting appearance.		211	
	4. Thread break or ends of seam or stitching, when not caught in other seams or stitching, except ends of continuous row of stitching not securely backtacked.		212	
	5. Ends of continuous line of stitching over lapped less than 1/2 inch.			306
	6. Not specified color of thread or various shades of thread used on outside or inside.	11		
	b. Gage of stitching:			
	1. Beyond range of gage specified or varies from gage specified more than 1/16 inch when no range is specified.			307
	2. Irregular, i.e., uneven gage or various stitching not uniform, affecting appearance.		213	
	3. Edge or raised stitching too close to edge resulting in damage to cloth.	12		
	c. Open seams (broken, missing, skipped stitches, except on top, raised or edge stitching, not resulting in an open seam):			
	1. On outside: - not more than 1/8 inch. - more than 1/8 inch but not more than 1/2 inch. - more than 1/2 inch.	104	214	308
Seams and stitching (cont'd)	2. On outside: - not more than 1/4 inch. - more than 1/4 inch.		215	309

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
	3. Hand felling: - not more than 1/8 inch. - more than 1/8 inch.		216	310
	d. Stitches skipped, missing or broken on top, edge or raised stitching not resulting in an open seam: - 1/4 inch or more but not more than 1/2 inch. - more than 1/2 inch.	105		311
	e. Raw edges:			
	1. On outside: - less than 1/8 inch. - 1/8 inch or more. - more than 3/8 inch.	106	217	312
	2. On inside: - 1/8 inch or more. - more than 3/8 inch.		218	313
NOTE: Raw edges (classified as such when they occur at places where an edge is required to be turned under) not securely caught in the stitching shall be classified as an open seam.				
Seams and stitching (cont'd)	f. Run offs:			
	1. Joining seams when resulting in an open seam (use open seam classification)			
	2. Top, edge or raised stitching (when not resulting in an open seam): - 1/4 inch or more. - 1/2 inch or more.		219	314
	g. Seam and stitch type:			
	1. Not type specified.		220	
	h. Stitch tension:			
	1. Loose tension, resulting in loose seam.	107		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
	2. Loose tension on edge or raised stitching resulting in loosely exposed bobbin thread or top thread.		221	
	3. Tight tension (stitches break when normal strain is applied to seam or stitching) classify as open seam).			
NOTE: Puckering is evidence of tight tension; when puckering is evident, the seam shall be tested by exerting pull in the lengthwise direction of seam or stitching.				
	i. Stitches per inch less than minimum specified:			
	a. Except label:			
	- one or two stitches.			315
	- three stitches.		222	
	- four or more stitches.	108		
	b. On label:			
	- 1 or more stitches.			316
NOTE: To be scored only if condition exists on major portion of seam.				
Shaded parts	a. Any outside part shaded.	13		
	b. Any lining parts shaded.		223	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

4.4.2.3. Detailed defects (outside). Detailed defects on outside shall be classified as follows:

Examine	Defects	Classification		
		Major	Minor A	Minor B
Alignment of hook and eye at end of collar stand	a. Not aligned, causing collar ends to be uneven by 1/4 inch or more when fastened.		224	
	b. Ends of collar spread open 1/4 inch or more when front is fastened.		225	
Collar (construction and setting)	a. Tight, i.e., causing puckers on back and fronts.	14		
	b. Loose, i.e., setting away from neck.	15		
	c. Joining seam of collar to neckline caught through collar lining.		226	
	d. Collar lining exposed beyond top crease edge of collar.		227	
	e. Collar edge:			
	1. Crooked, affecting appearance.		228	
	2. Under collar exposed along collar edge affecting appearance.		229	
	f. Top collar:			
	1. Tight, causing edges to curl on under collar, affecting appearance.	16		
	2. Twisted, i.e., having a diagonal twist, affecting appearance.	17		
	3. Collar crushed or burnt.	18		
	4. Full, i.e., having excessive puckers or fullness, affecting appearance.	19		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
Collar (construction and setting) (cont'd)	g. Under collar:			
	1. Interlining pleated, affecting appearance.	20		
	2. Interlining tight or twisted, causing puckers on under collar.		230	
	3. Interlining omitted.	109		
	h. Collar shape:			
	1. Not uniform, i.e., ends of collar vary in length by 1/4 inch or more.		231	
	2. Pointed ends poorly shaped or not of uniform shape or size.	21		
	i. Collar tab:			
	1. Omitted.	110		
	2. Tab extending less than 3/4 inch beyond end of collar.		232	
	3. Not positioned on inside of collar at left end of collar.	111		
	4. Hand felling omitted or insecure at top, back or bottom raw edges of tab to collar lining.		233	
	j. Collar stand:			
	1. Edgestitching omitted along folded end or along upper edge of collar stand.	112		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
Collar (construction and setting) (cont'd)	2. Seam allowance of the collar, collar stand and lining not turned down toward neck edge of stand or seam allowance not caught in the raised stitching.		234	
	3. One or both corners not securely tacked.		235	
Body lining (scarlet)	a. Fitting of lining:			
	1. Tight short or twisted causing fullness or twist on outside, affecting appearance.	22		
	2. Lining too long, i.e., exposed beyond bottom edge, affecting appearance.		236	
	b. Fitting of interlining:			
	1. Tight, short or twisted causing fullness or twist on outside, affecting appearance.	23		
	2. Too full, causing front to have a wavy appearance, affecting appearance.	24		
	3. Tacking of shoulder edge of interlining to shoulder edge of back part seam allowance omitted or insecure.		237	
Front and bottom edges	a. Front edges stretched, affecting appearance.		238	
	b. Tape set on tight causing puckering on front, affecting appearance.		239	
	c. Front edges irregular, causing curved or crooked edges, affecting appearance.		240	
	d. Front edges bulky or not properly forced out.			317

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification		
		Major	Minor A	Minor B
Front and bottom edges (cont'd)	e. Scarlet lining exposed on right or left front edge.			318
	f. Bottom corner at one or both fronts poorly shaped.		241	
	g. Bottom edge stretched or uneven.			319
Agraffe cord and frogs (position, alignment and attachment to fronts of cloak)	a. Positioned less than 2-1/2 inches or more than 3-1/2 inches from lower edge of collar stand.		242	
	b. Positioned less than 1-1/2 inches or more than 2-1/2 inches from shoulder seam line.		243	
	c. Ends of cord out of horizontal alignment by more than 1/2 inch when cord is buttoned onto the frog on right front.		244	
	d. Tacking stitches at one or both ends of cord caught through scarlet lining.		245	
	e. Tacking at one or both ends of cord insecure.		246	
	f. Cord reversed, i.e., cord with frog on right front and unattached frog on left front.	113		
	g. Front part distorted when cord is buttoned onto frog on right side of cloak.		247	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

4.4.2.4. Detailed defects (inside). Detailed defects on inside of cloak shall be classified as follows:

Examine	Defects	Classification		
		Major	Minor A	Minor B
Hanger braid	a. Missing, or both ends not securely caught in joining seam at neckline.		248	
	b. Less than 1-7/8 inches or more than 2-1/2 inches long.			320
Identification label	a. Missing, incorrect or illegible.		249	
	b. Not stitched on all four sides.			321
	c. Top edge positioned less than 2 inches or more than 2-1/2 inches below neckline.			322
Size label	a. Omitted, incorrect or illegible.		250	
	b. Not securely caught in joining seam at neckline.		251	
Scarlet lining	a. Excessive fullness or twist not affecting outside of cloak.			323
	b. One or more seams not pressed open.		252	
	c. Bottom edge of lining less than 1/2 inch up from bottom edge of cloak.			324
Bottom hem	a. Twisted, not affecting smoothness on outside.			325

4.4.2.5. Finished measurements. Any measurement deviation from the nominal dimension and tolerance specified in Table II shall be classified as a measurement defect.

4.5. Tests.

4.5.1 Stiffness. The stiffness tests shall conform to the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

a. The original test for stiffness shall be in accordance with method 5202 of FED-STD-191, using the moment-weight of one pound.

b. The after wet (dry) cleaning test shall be in accordance with method 5622 of FED-STD-191, except the material shall be subjected to three 20 minute test cycles.

c. The after accelerated aging test shall be in accordance with method 5850 of FED-STD-191, except the aging process shall be limited to five hours at a temperature of 100°C.

d. The after test for perspiration shall be in accordance with method 5682 of FED-STD-191, except the material shall be immersed in the specified solution for 20 minutes and then air-dried.

4.5.2 Tackiness. At room temperature (60-80° F), press a piece of tissue against the lacquered surface for 30 seconds, using any pressure capable of being exerted by the thumb and two fingers. The tissue shall not adhere to the lacquered surface, but shall fall free when pressure is released.

5. PACKAGING

5.1. Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by Department of Defense (DoD) personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department of Defense Agency, or within the Military Department's Systems Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

6.1. Intended use. The cloak covered by this specification is intended for wear by male U.S. Marine Corps officers with the evening dress uniform.

6.2. Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2).
c. Packaging requirements (see 5.1).
d. Size required (see 1.2).
e. Whether first article is required (see 3.2).
f. Number of cloaks in first article (see 3.2).

6.3. Standard sample. For information regarding the availability of standard samples and standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4. Figures. Figures 1 through 6 show general design of the cloak and are furnished for information only. In the event of a conflict between these figures and the text of this specification, the text of this specification shall govern.

6.5. Subject term (keyword) listing.

Collar stand
Evening dress
Male

6.6. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Preparing Activity:
Navy - MC
Project No. 8405-N330

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

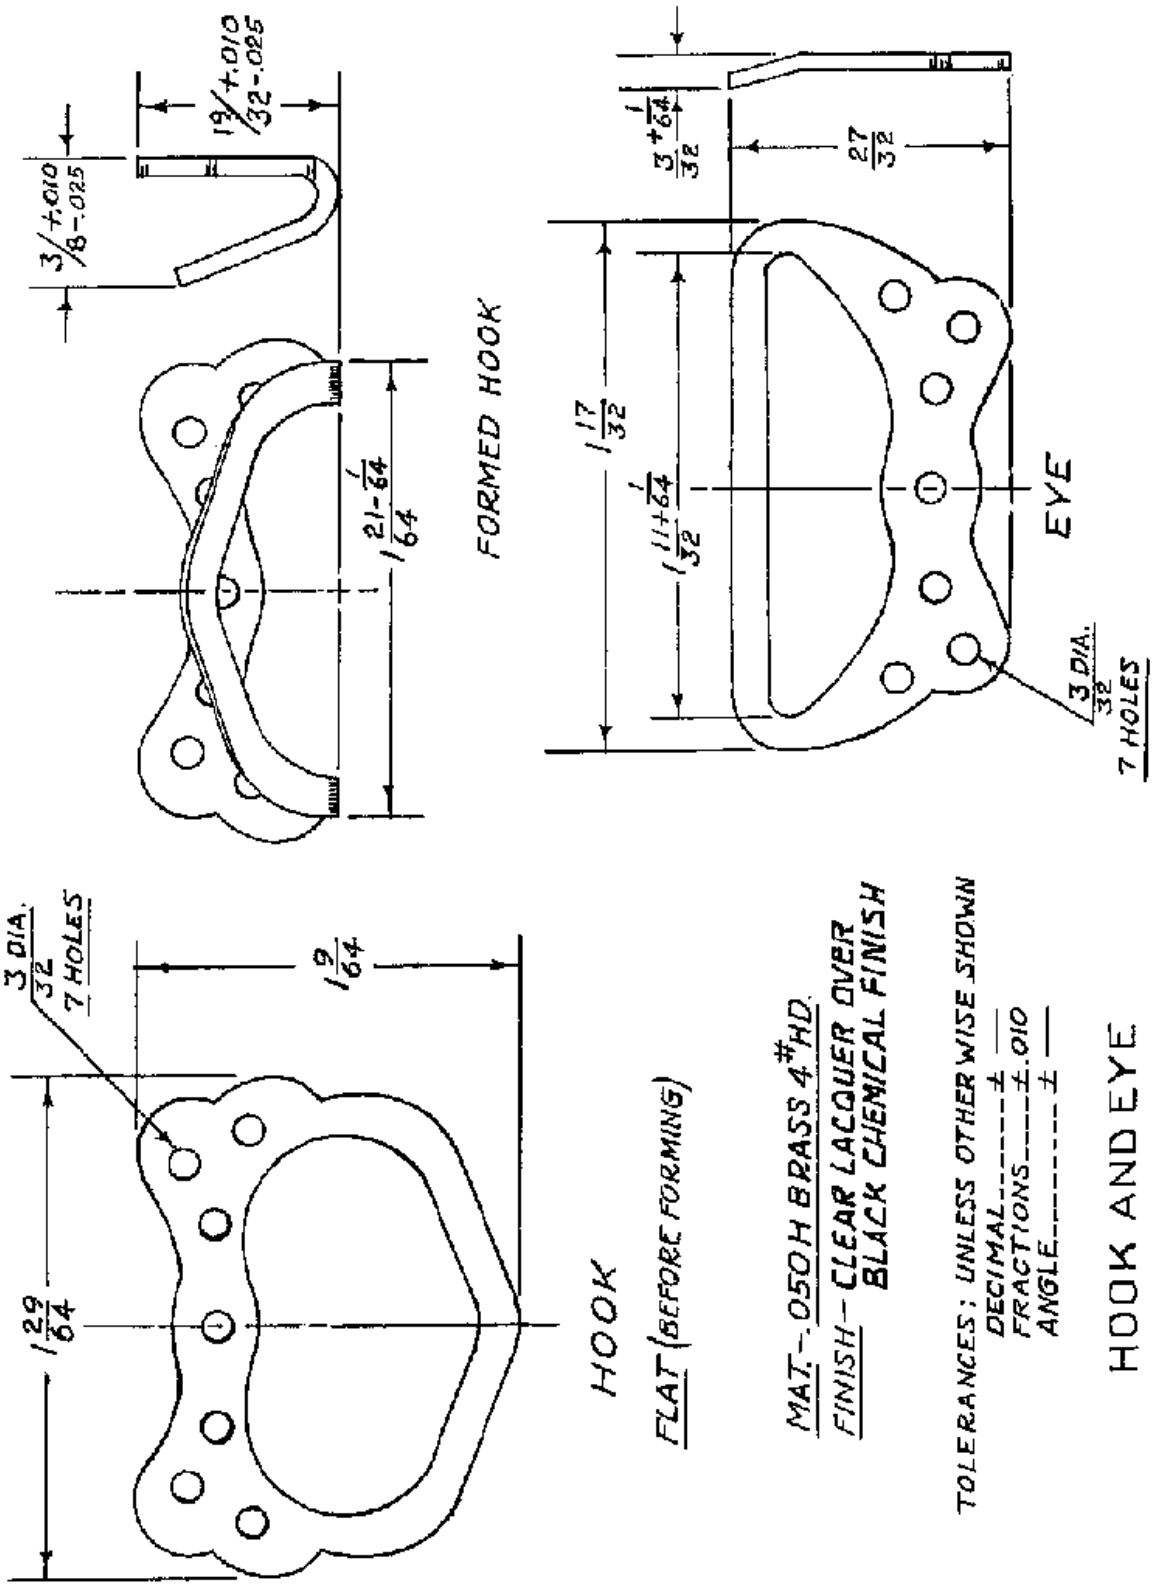


Figure 1. BOAT CLOAK – MENS' DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

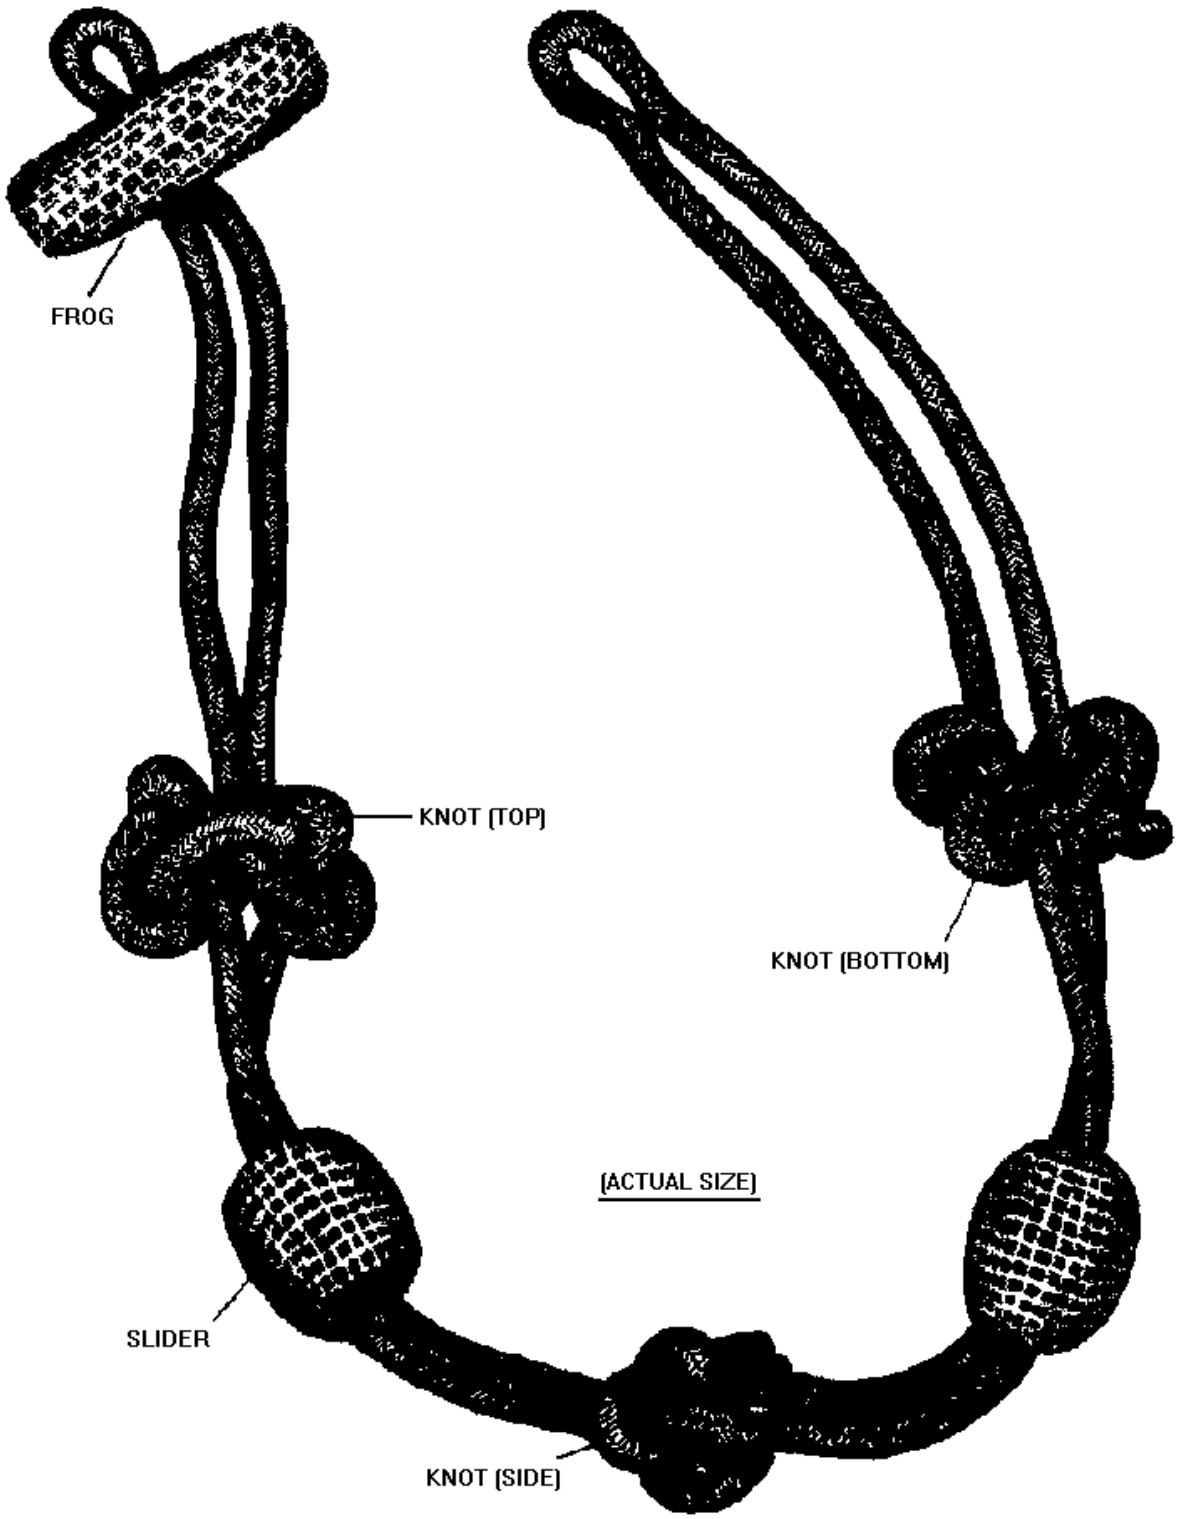


Figure 2. BOAT CLOAK – MENS' DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.


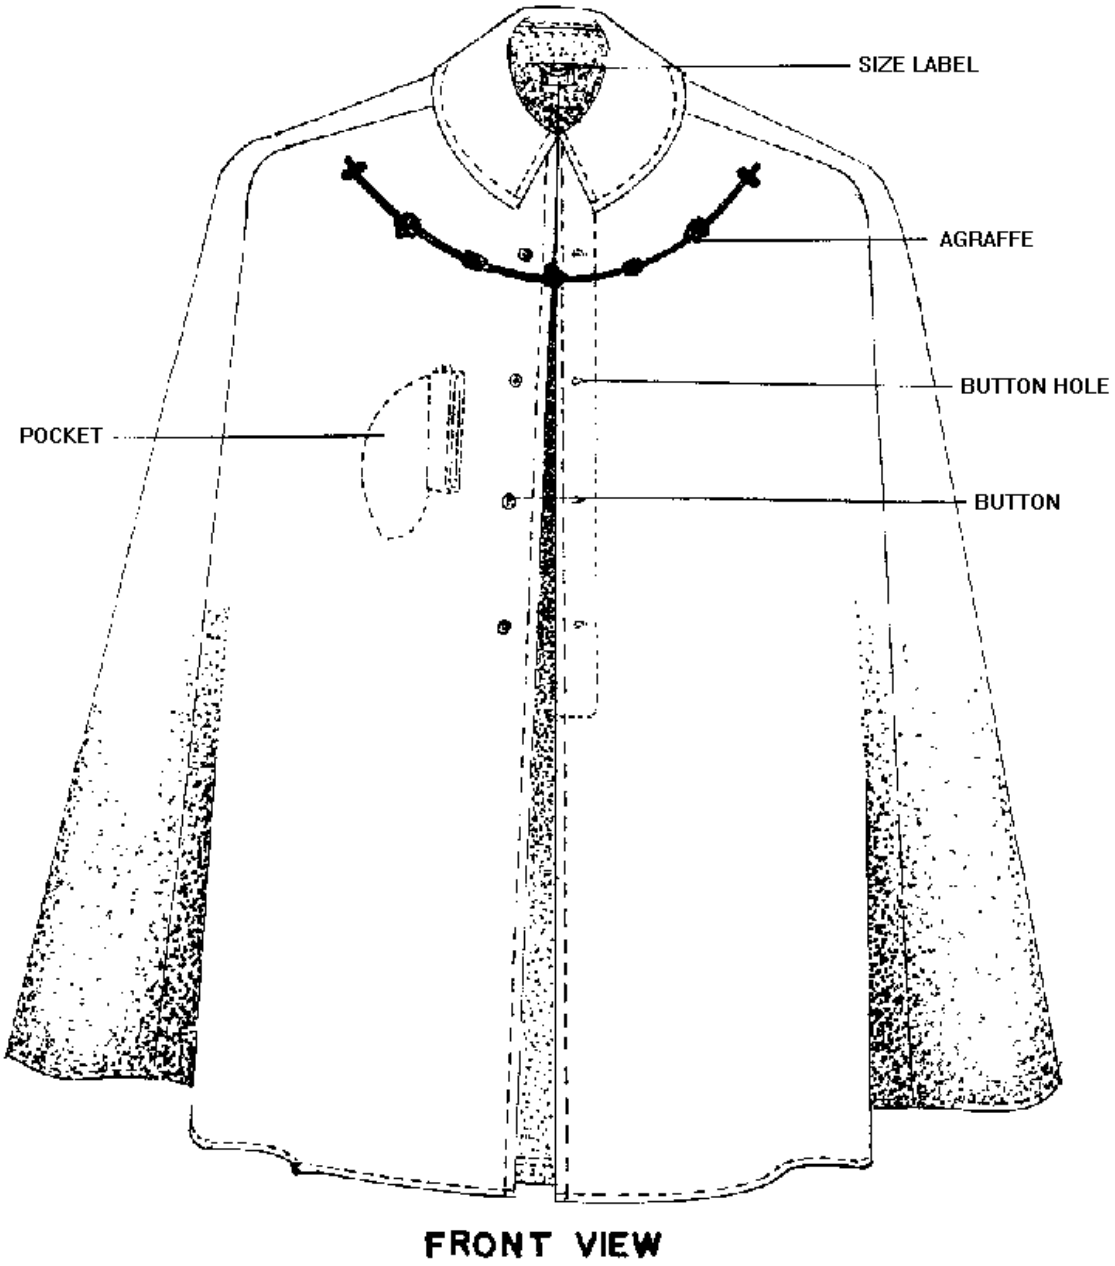


Figure 3. BOAT CLOAK - MENS' DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

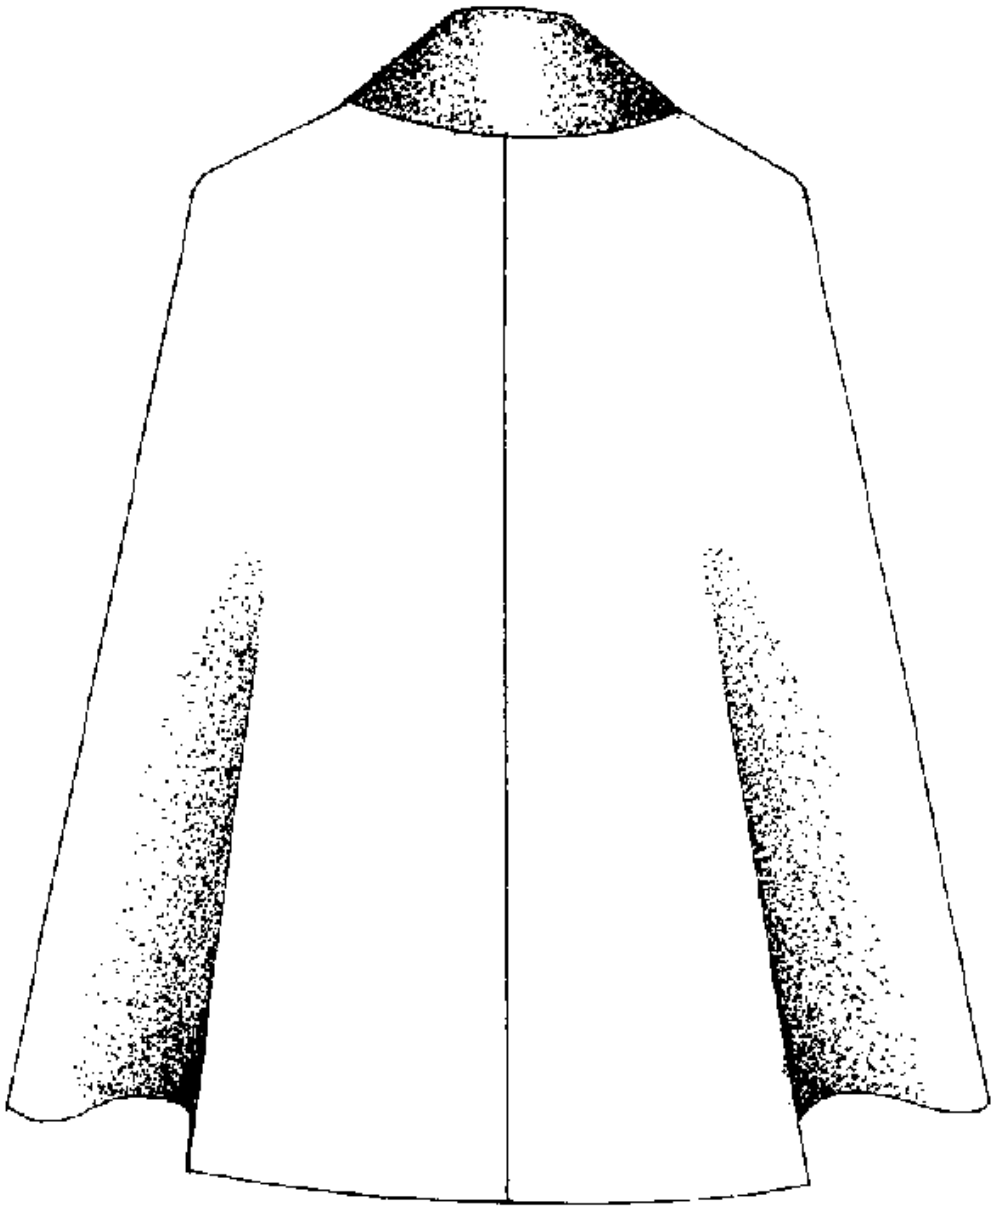

REAR VIEW

Figure 4. BOAT CLOAK - MENS' DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

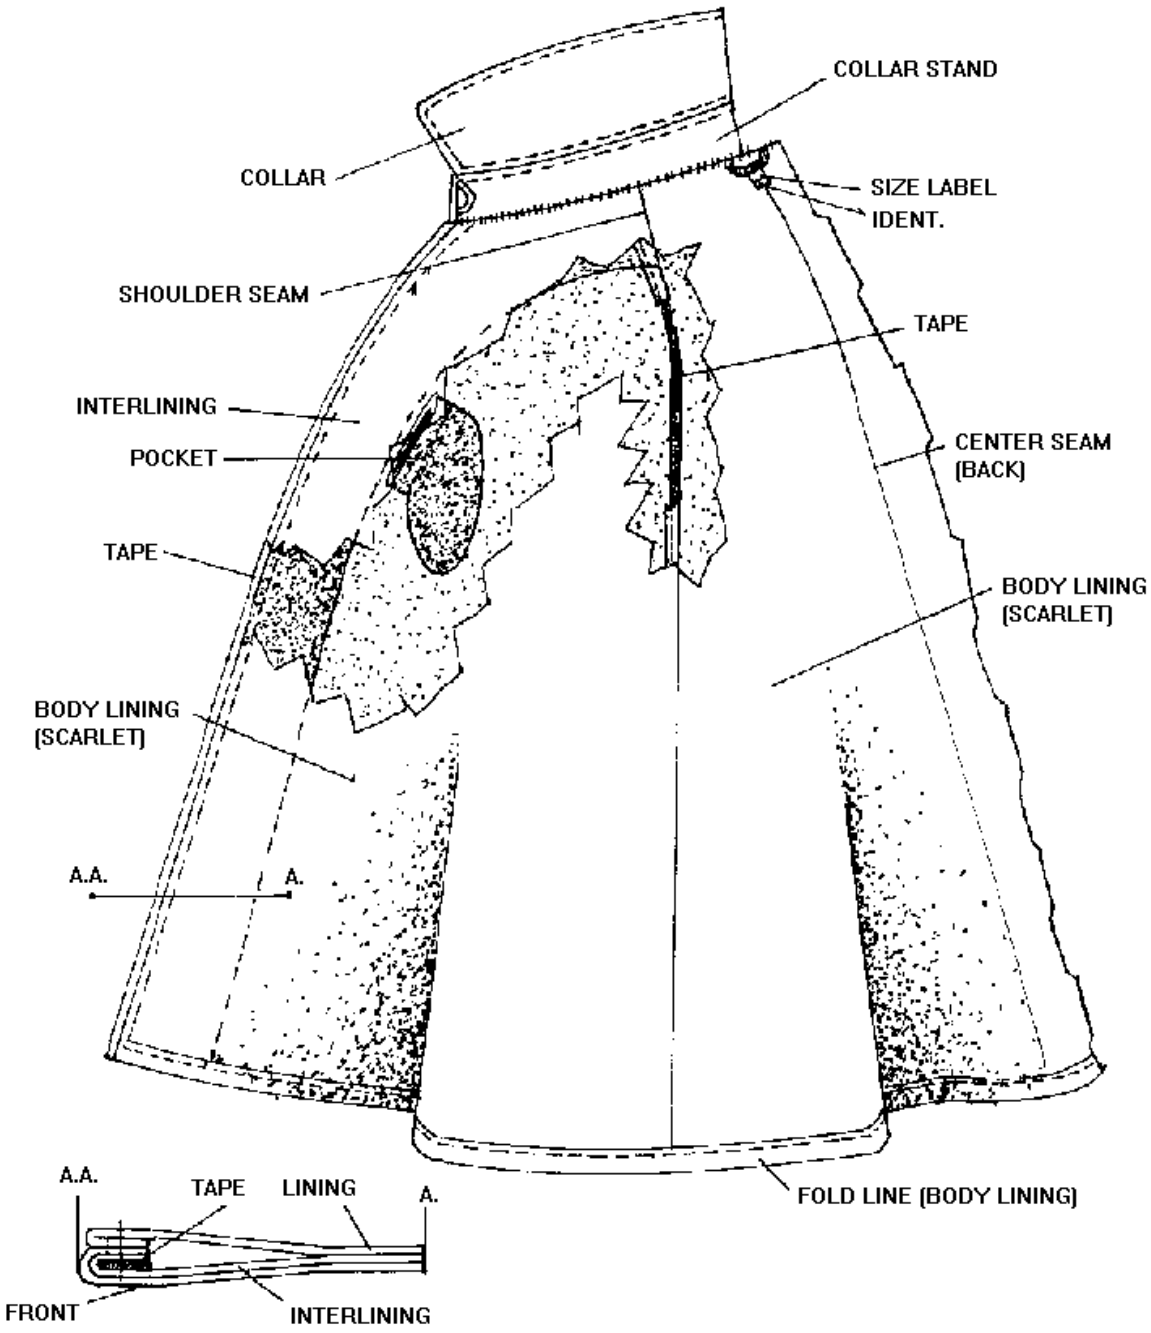


Figure 5. BOAT CLOAK – MENS' DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

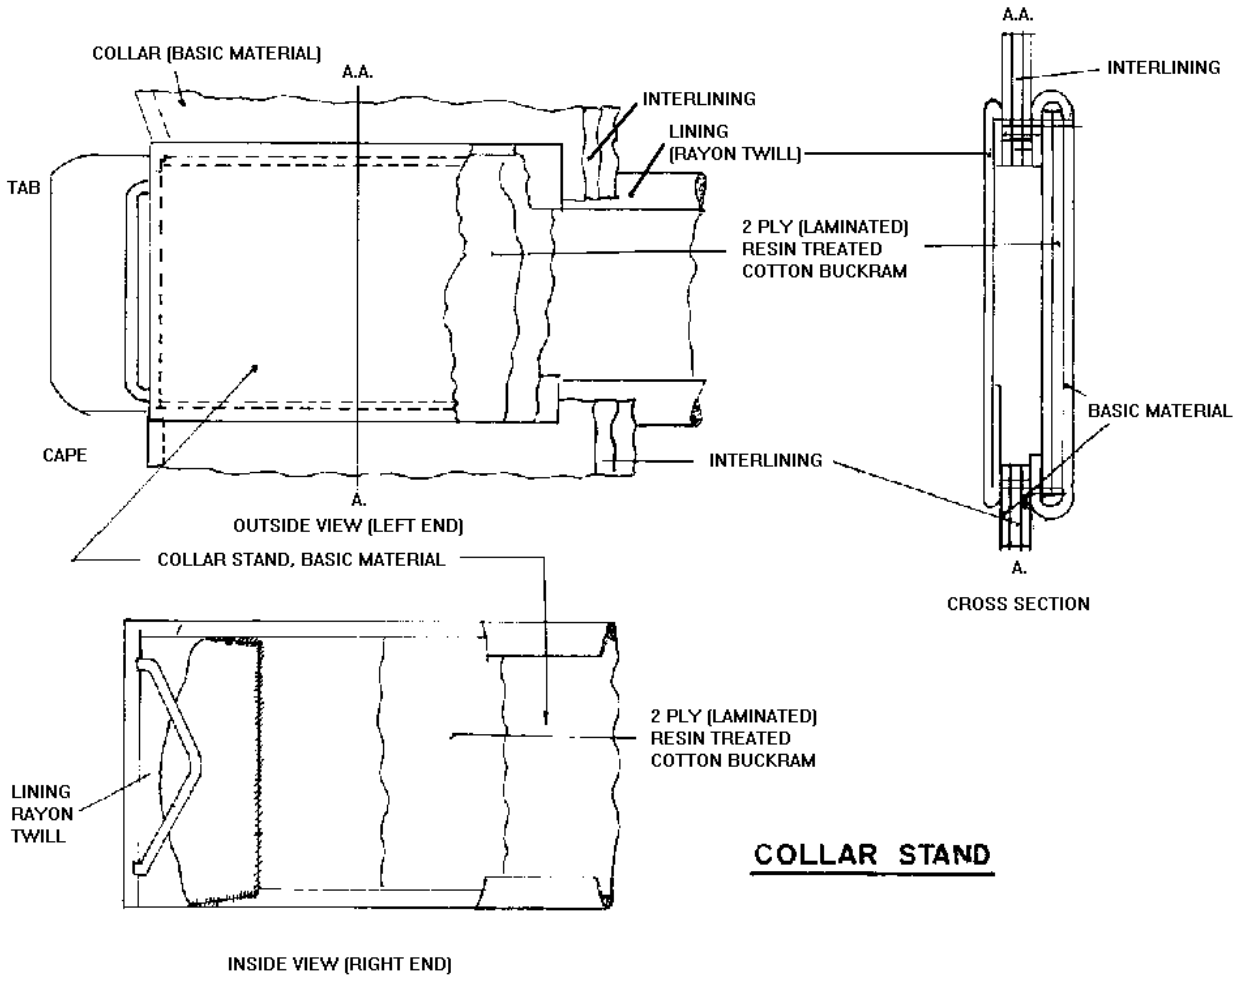


Figure 6. BOAT CLOAK – MENS' DRESS (OFFICER'S)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks, 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-32019(MC)	2. DOCUMENT DATE (YYMMDD) 13 January 1998

3. DOCUMENT TITLE: BOAT CLOAK, MENS' DRESS (OFFICER'S)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME COMMANDER, MARCORSYSCOM, PSE-D	b. TELEPHONE (include Area Code) (1) Commercial (2) DSN (703) 784-4584 278-4584
c. ADDRESS (Include Zip Code) 2033 BARNETT AVE, SUITE 315, QUANTICO, VA 22134-5010	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340, DSN 289-2340

DDFORM 1426, OCT 89 (EF) Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T04:20Z
Check the source to verify that this is the current version before use.