
INCH-POUND
MIL-F-16377/53A(SH)
9 December 1988
SUPERSEDING
MIL-F-16377/53(SH)
31 August 1971

MILITARY SPECIFICATION SHEET

FIXTURES, INCANDESCENT, DETAIL LIGHTING, LANTERN, HAND, PORTABLE AND RELAY WATERTIGHT SYMBOLS 100.2, 101.2, 102.2 AND 108

(A) This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

(A) The requirements including packaging, for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-F-16377(SHIPS).

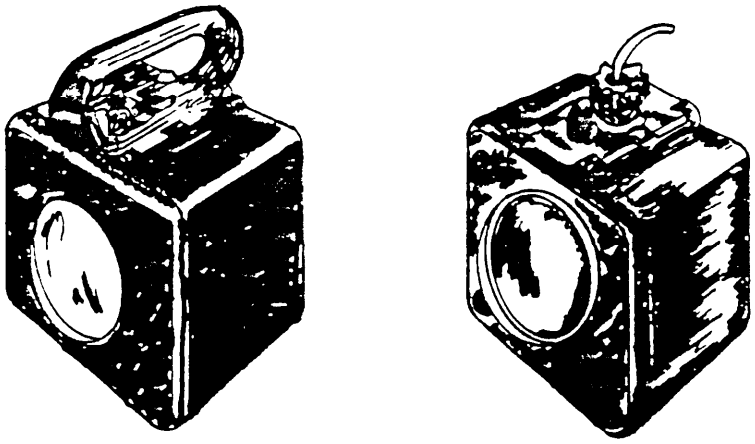

PORTABLE RELAY OPERATED

SH 132317642


FIGURE 1. Lanterns, hand, portable and relay.

(A) NOTES:
1. All dimensions in inches.
2. For tolerances other than specified herein, see MIL-F-16377.

(A) Denotes changes.

AMSC N/A FSC 6230
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

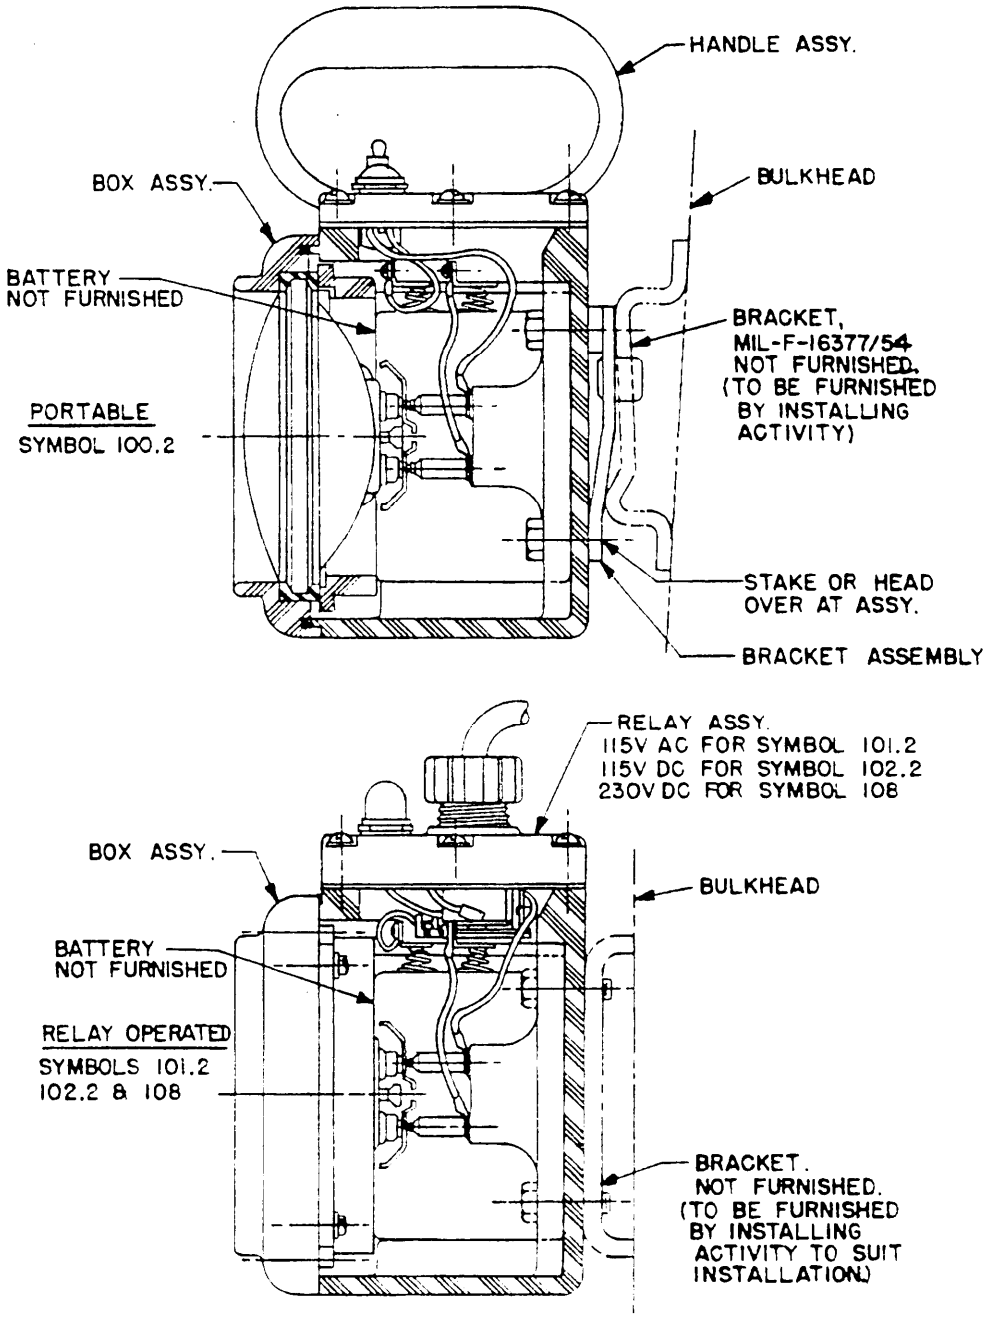

SH 10243

FIGURE 2. Lantern assembly and typical mounting.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

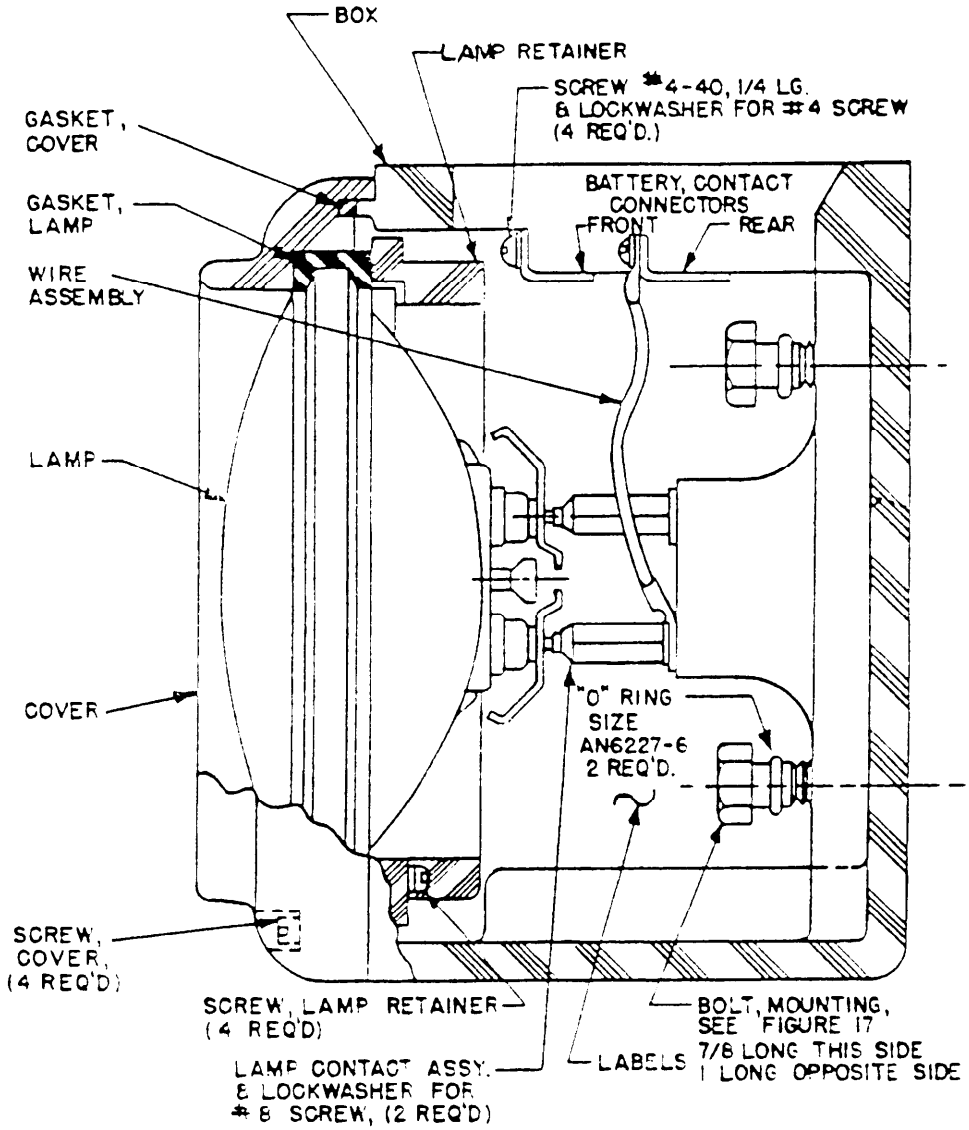

SH 10244

FIGURE 3. Body assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

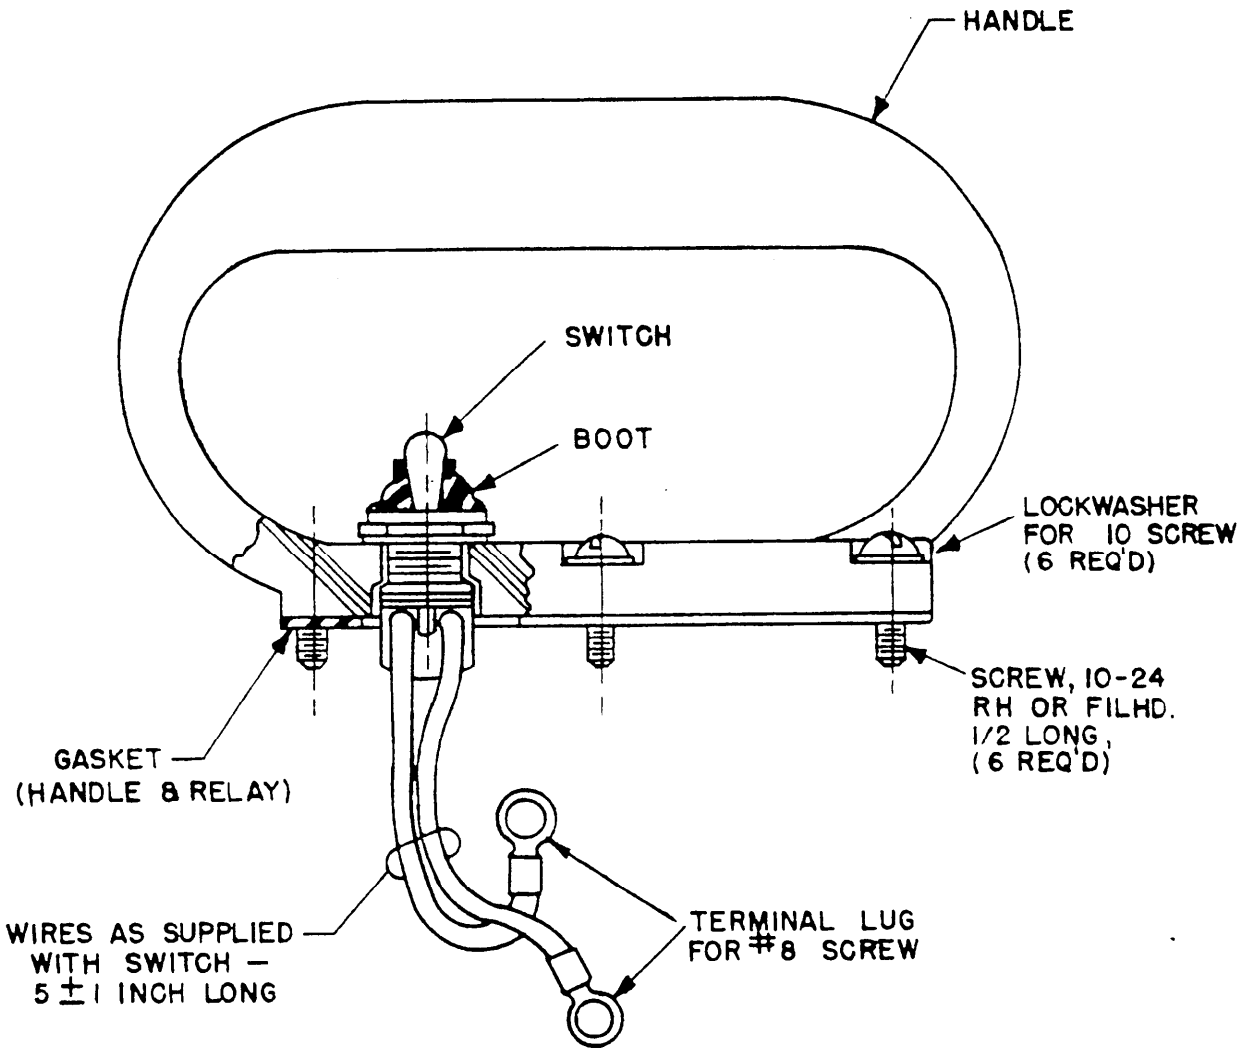


(A) NOTE: See figure 20 for schematic diagram.

SH 10245

FIGURE 4. Handle assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

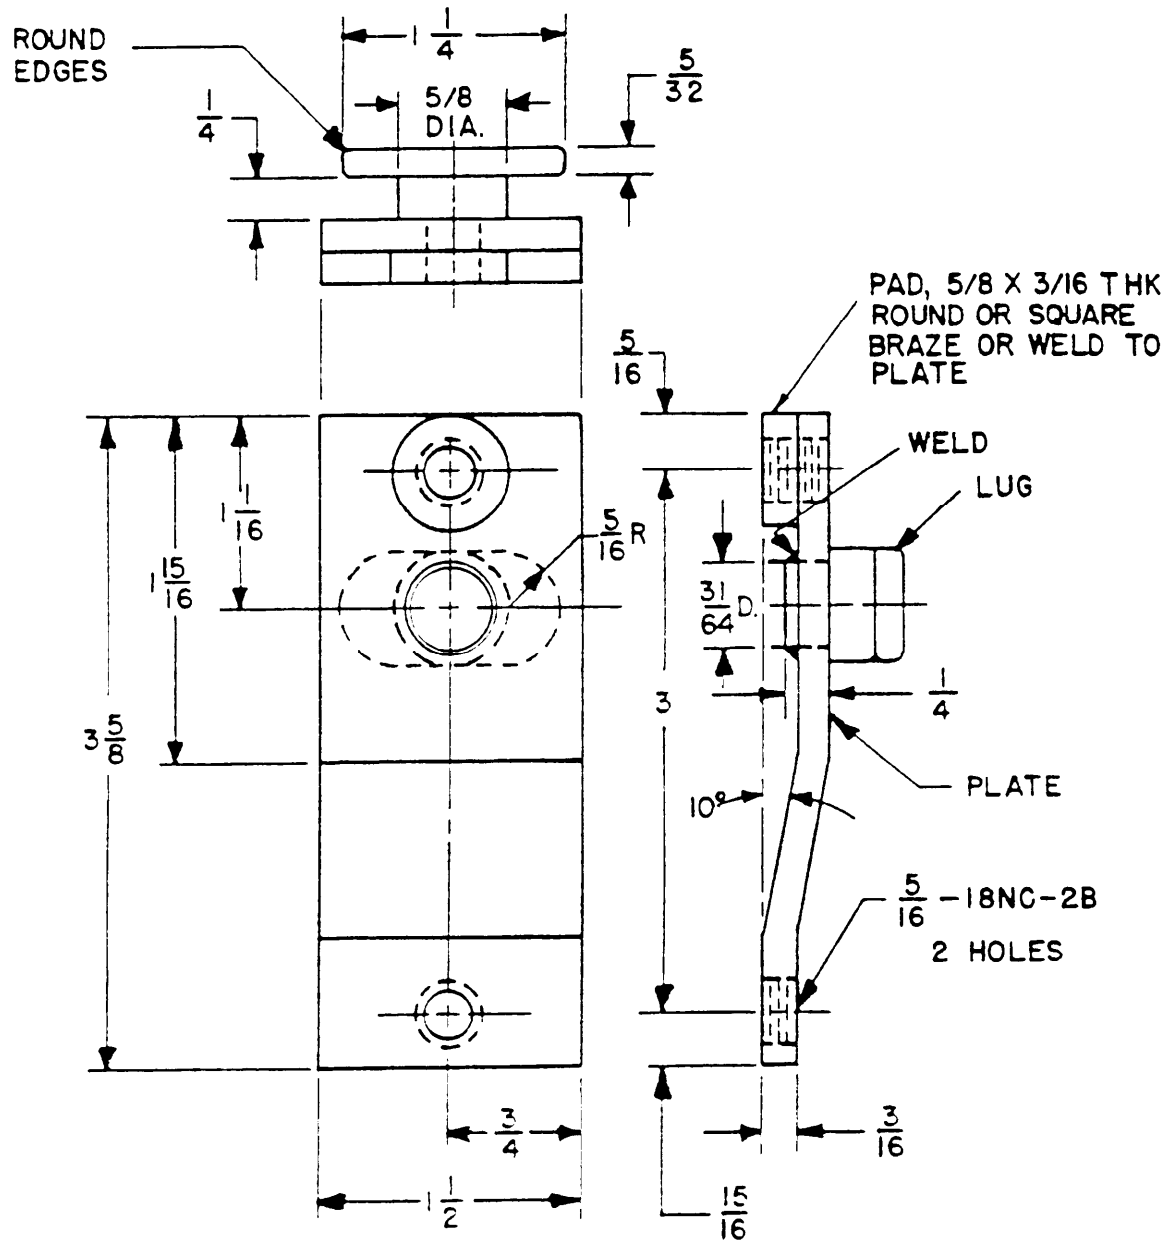

SH 10246

FIGURE 5. Bracket assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

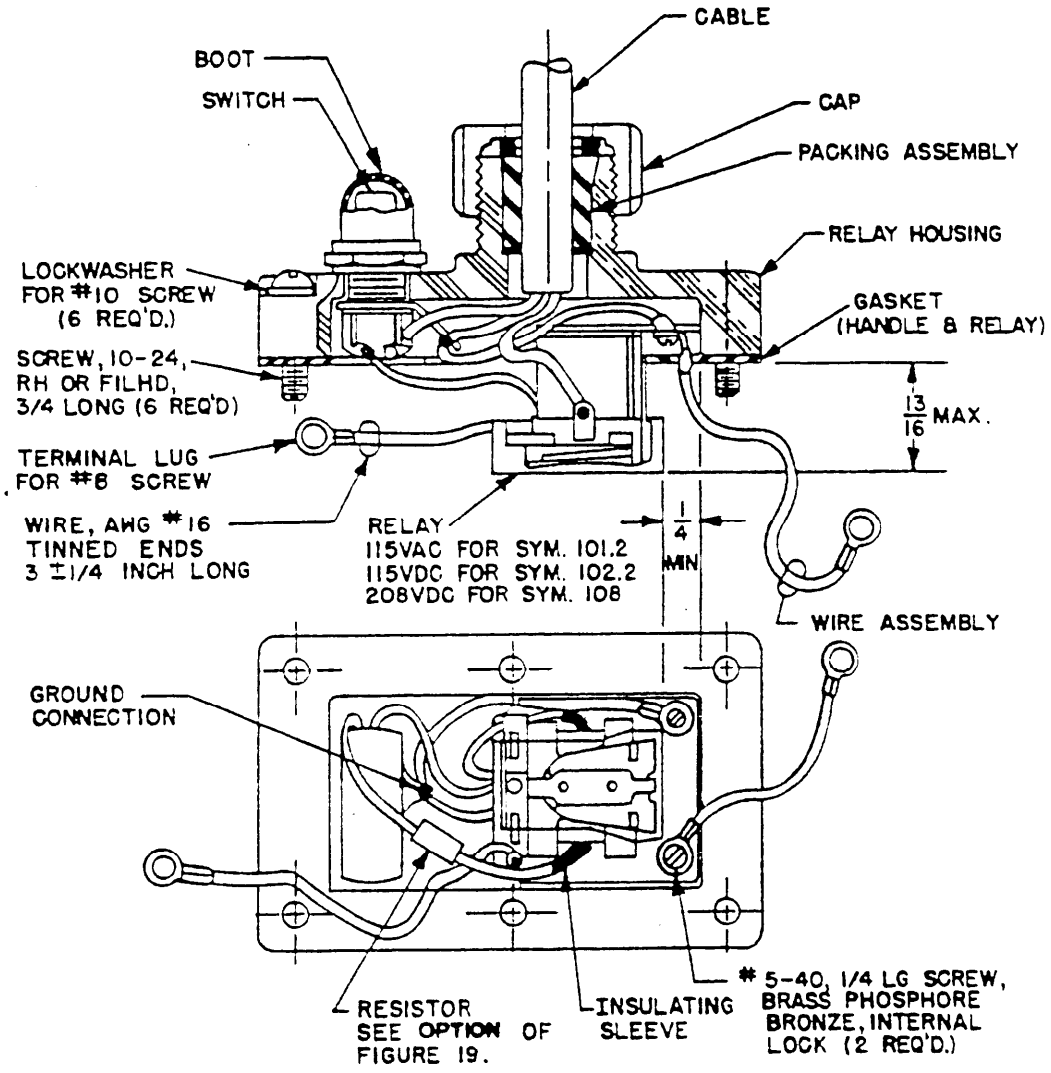


(A) NOTE: See figure 20 for schematic diagram.

SH 10247

FIGURE 6. Relay assembly.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

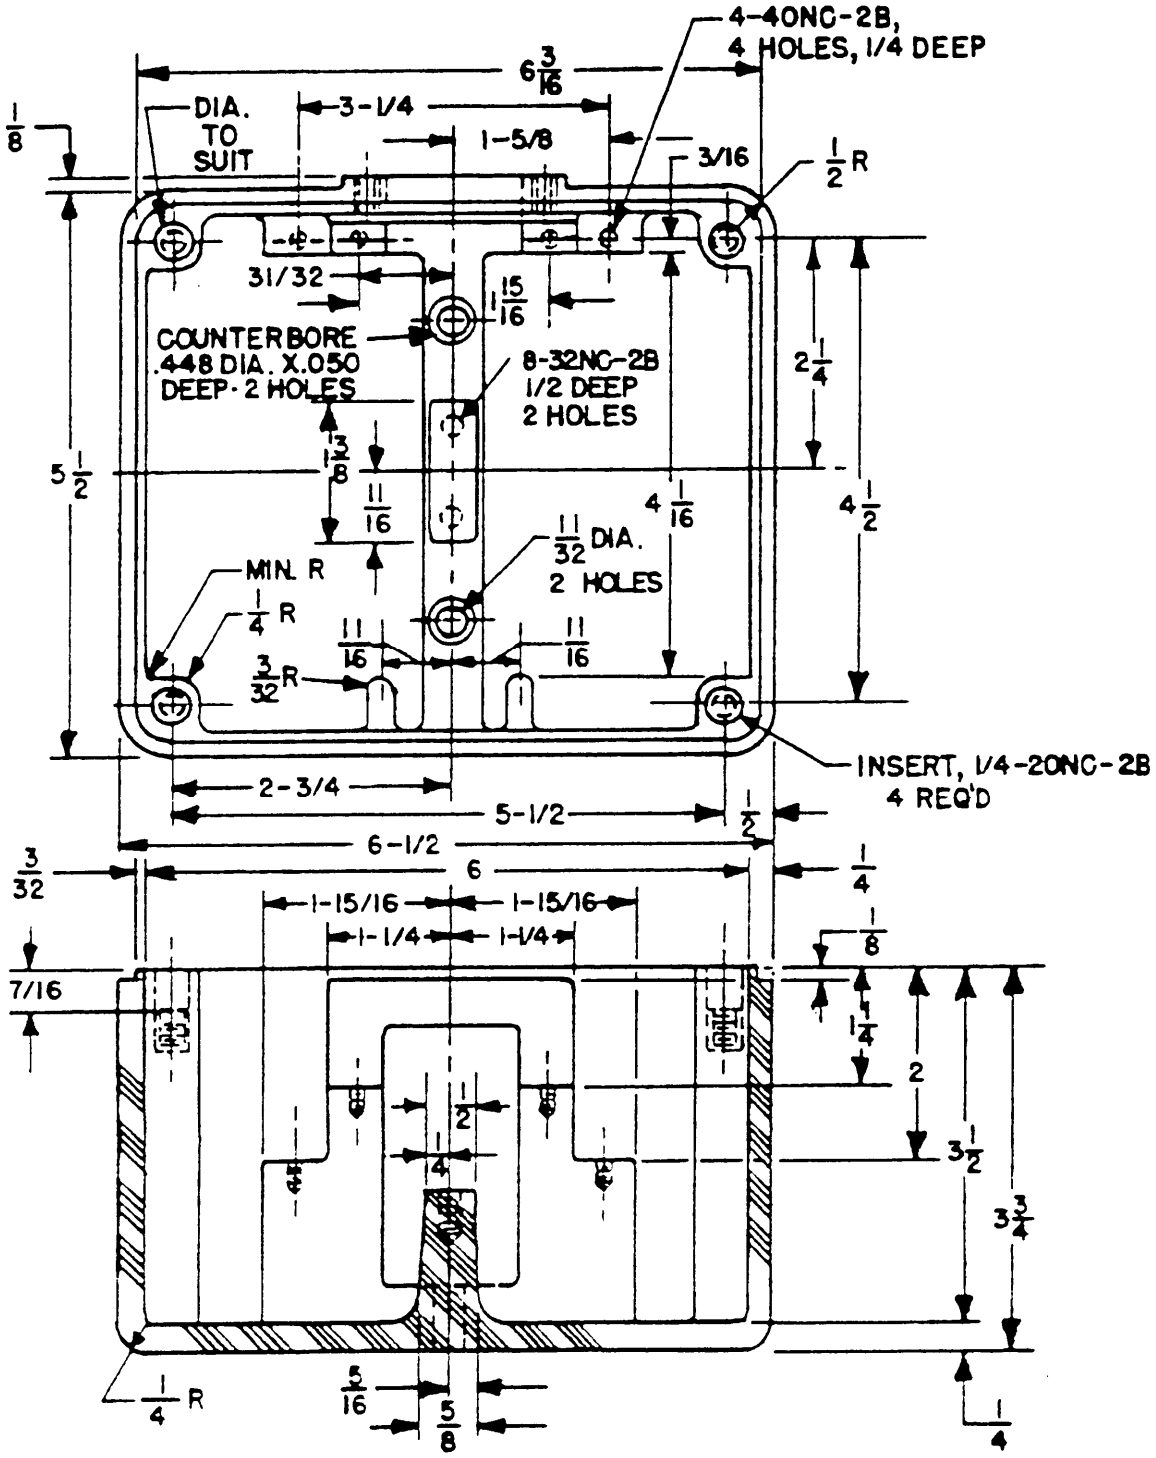

SH 10248

FIGURE 7. Box.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

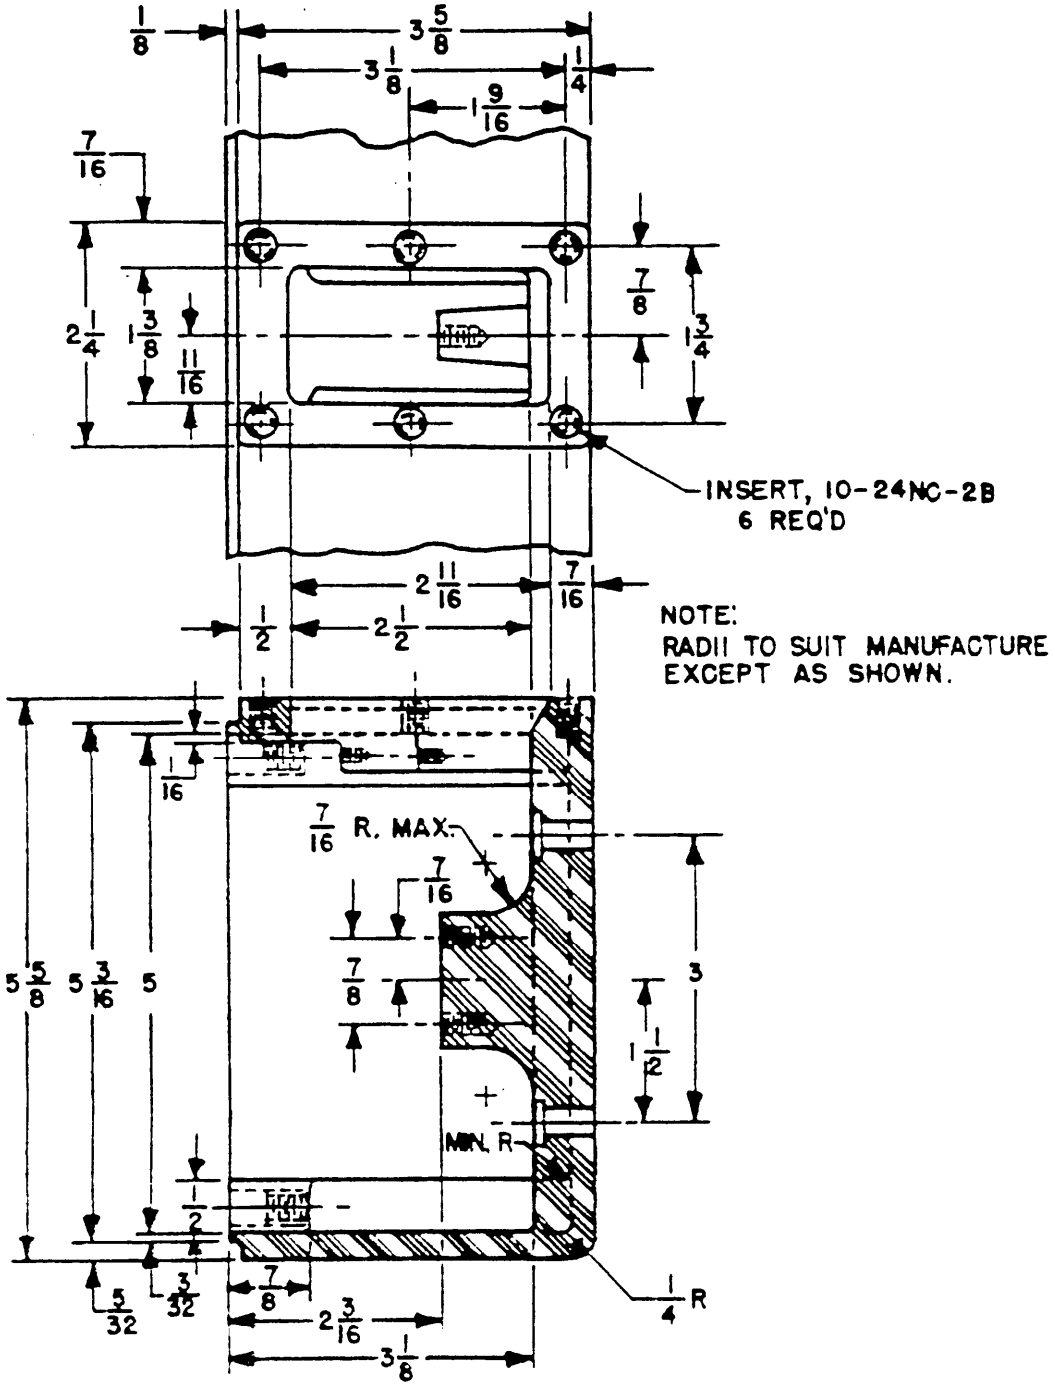

SH 10248

FIGURE 7. Box - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

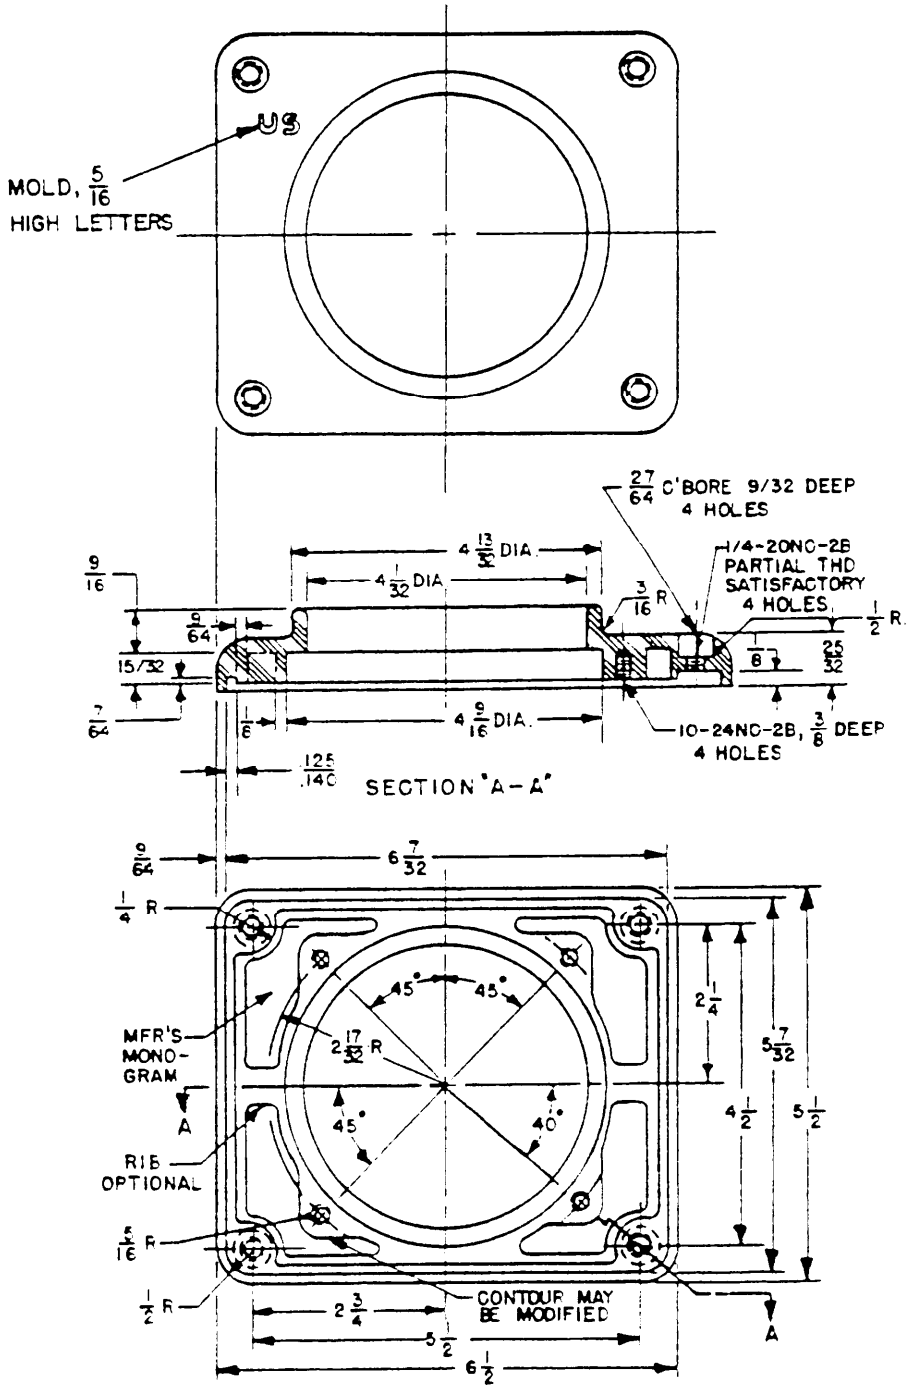

SH 10249

FIGURE 8. Cover.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

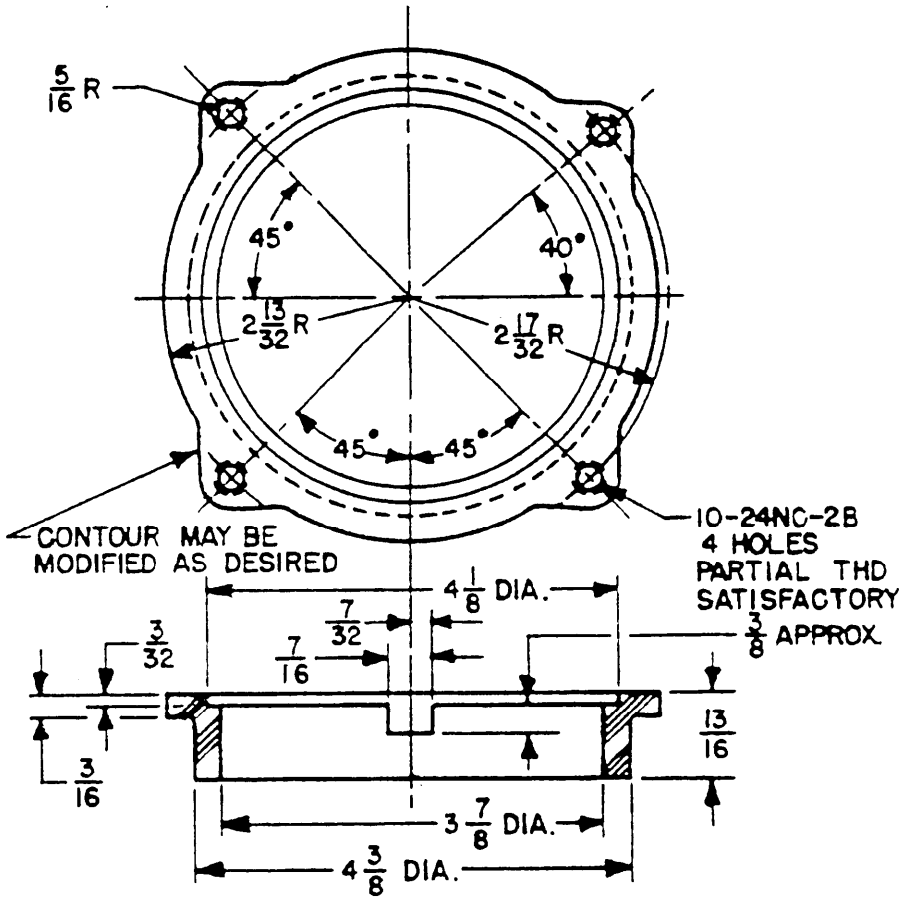

SH 10250

FIGURE 9. Lamp retainer.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

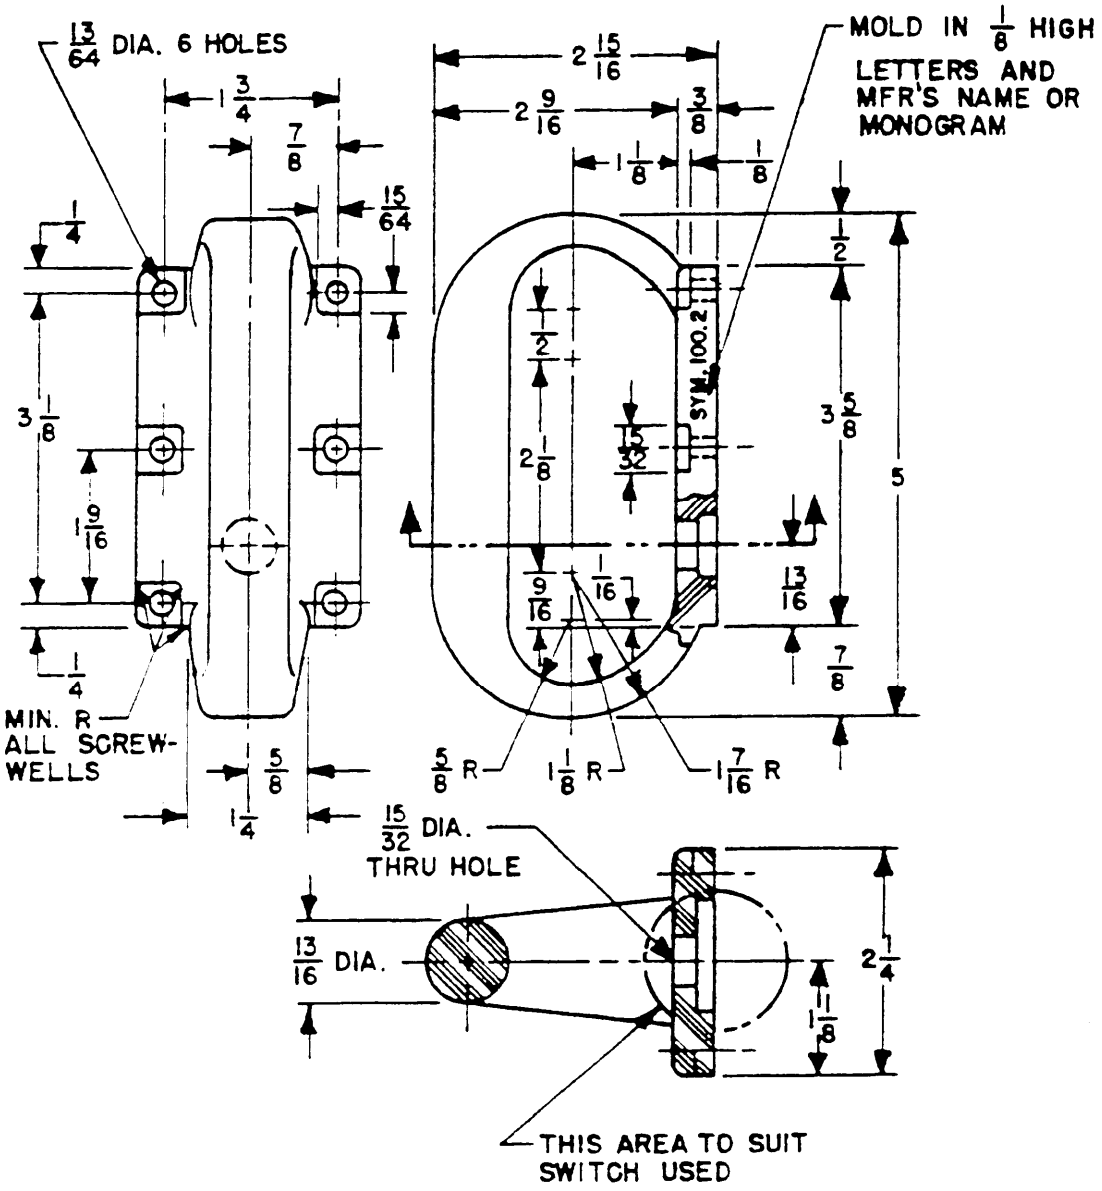


SH 10251

FIGURE 10. Handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

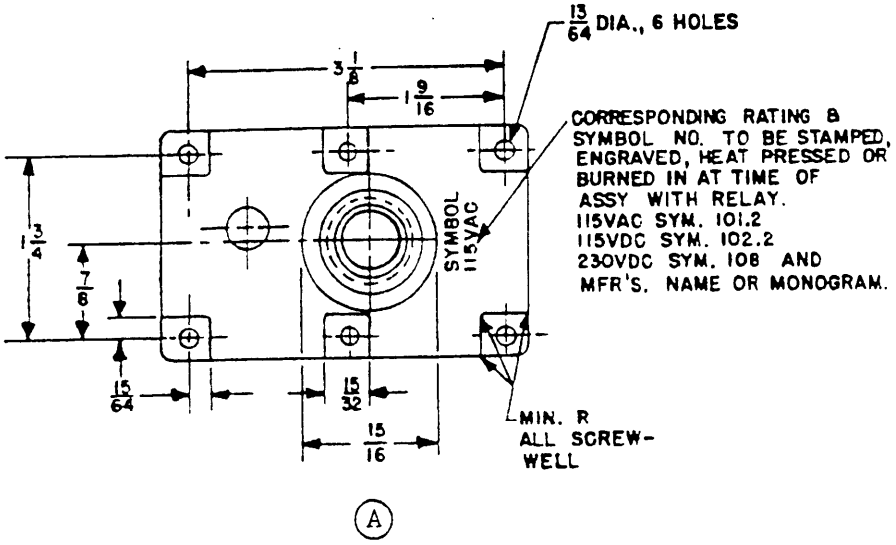


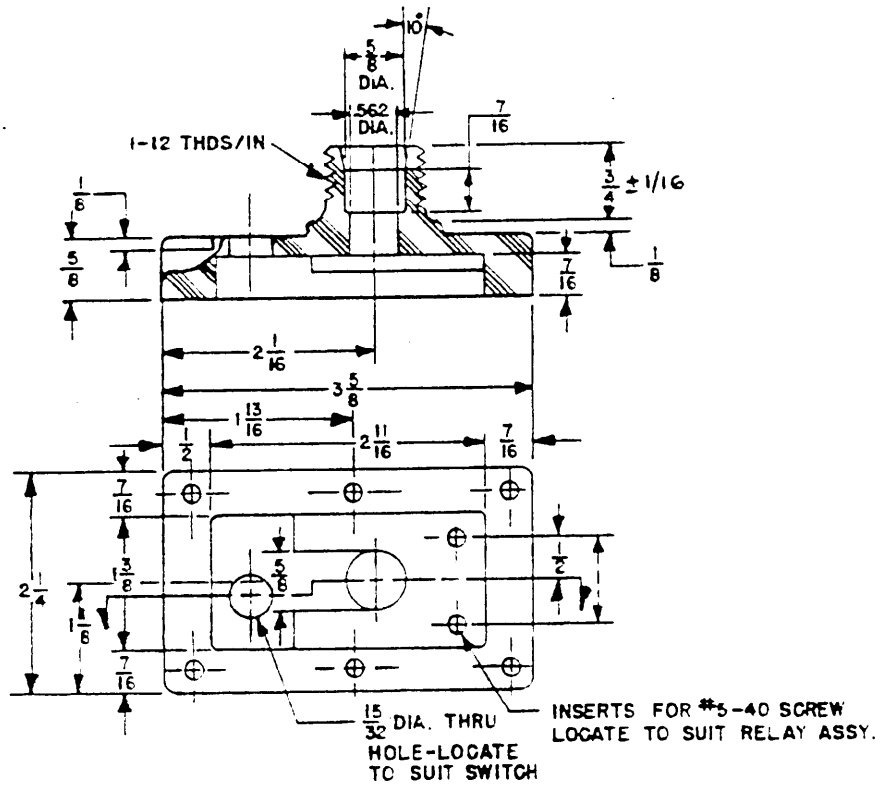

SH 10252


FIGURE 11. Relay housing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

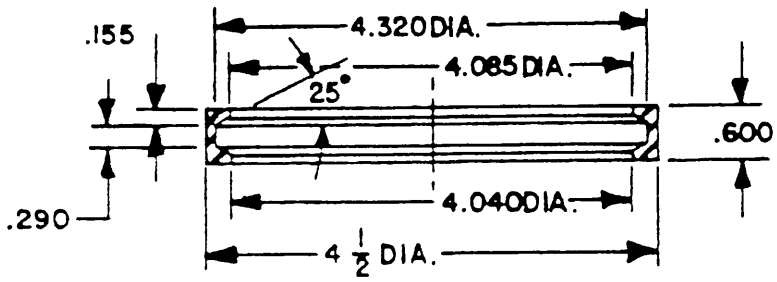

SH 10253


FIGURE 12. Gasket, lamp.

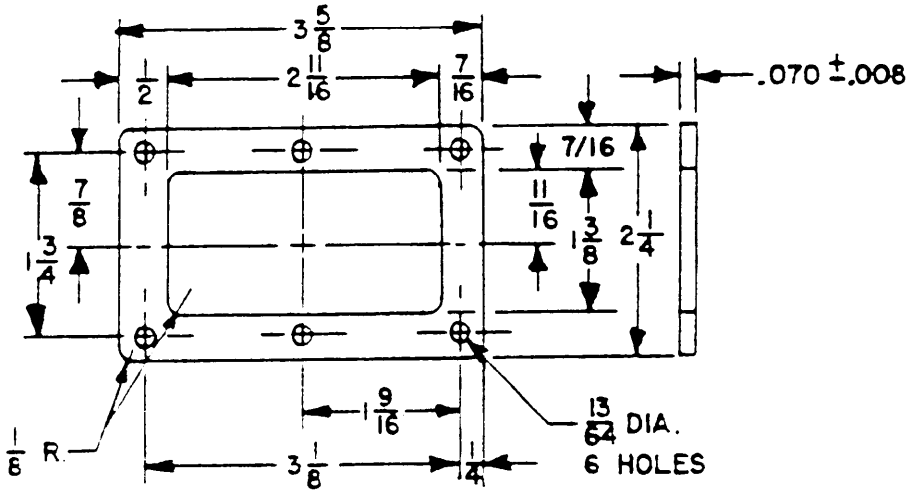

SH 10254

FIGURE 13. Gasket handle and assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

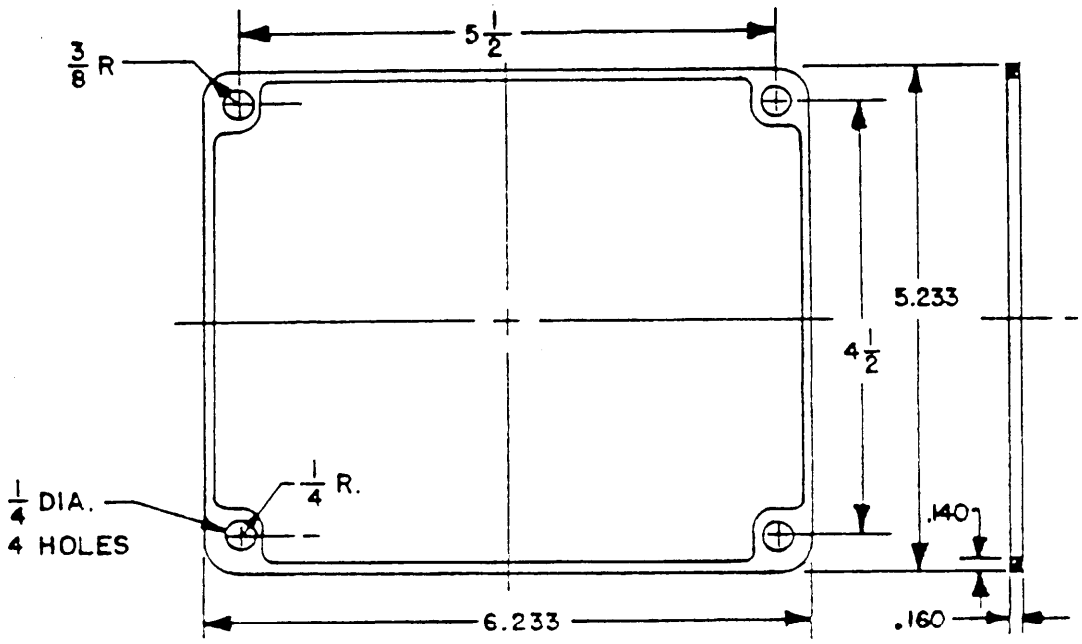

SH 10255

FIGURE 14. Gasket, cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

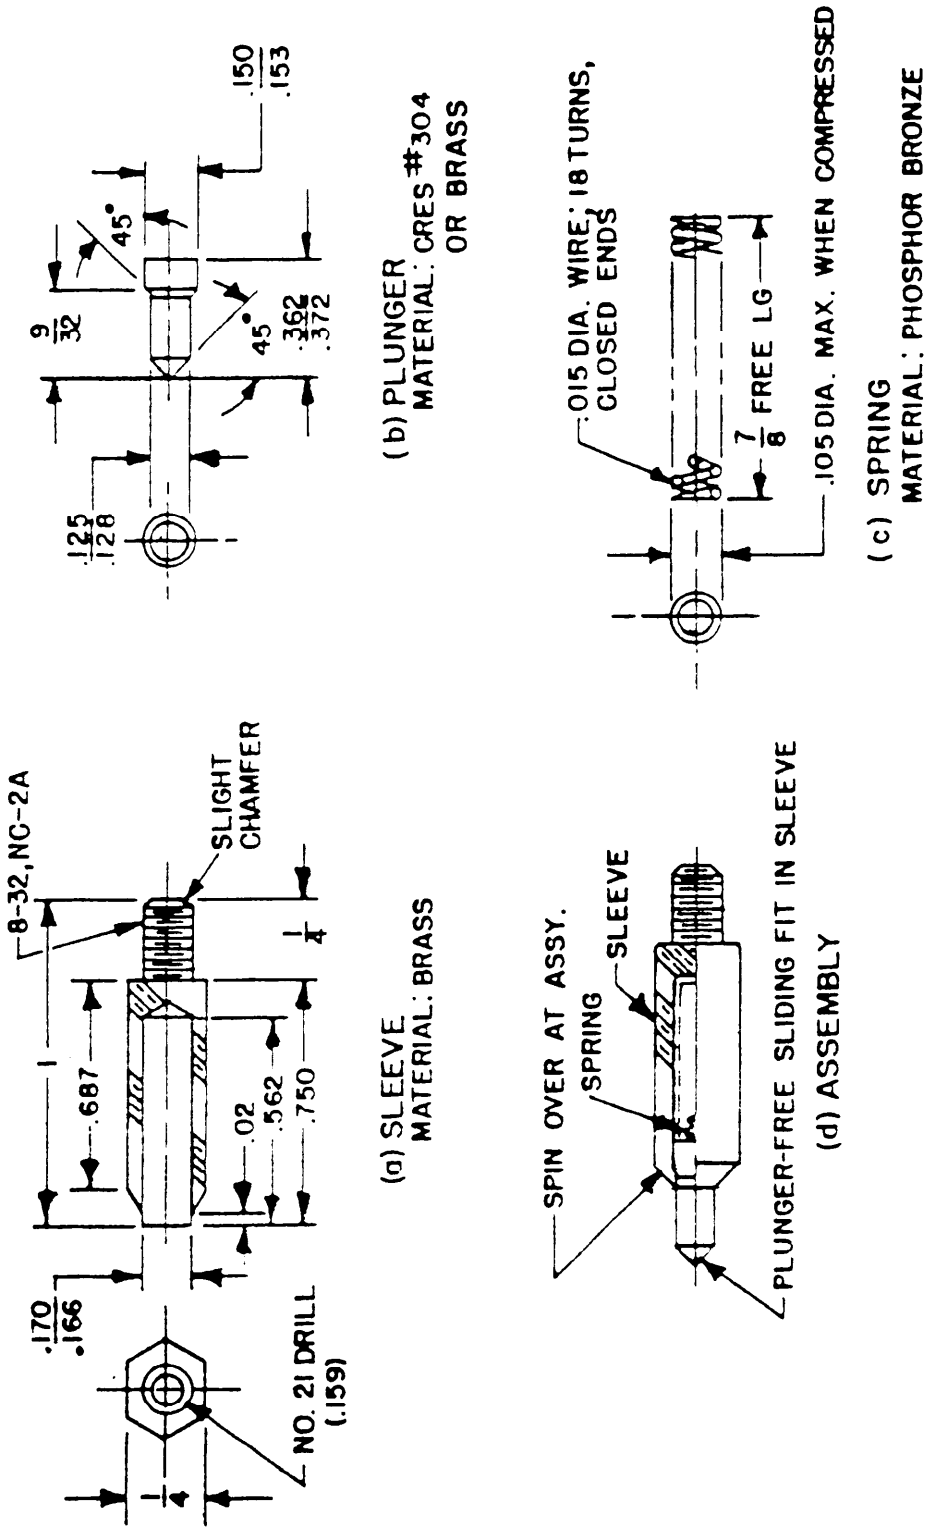


FIGURE 15. Lamp contact assembly.

SH 10256

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.


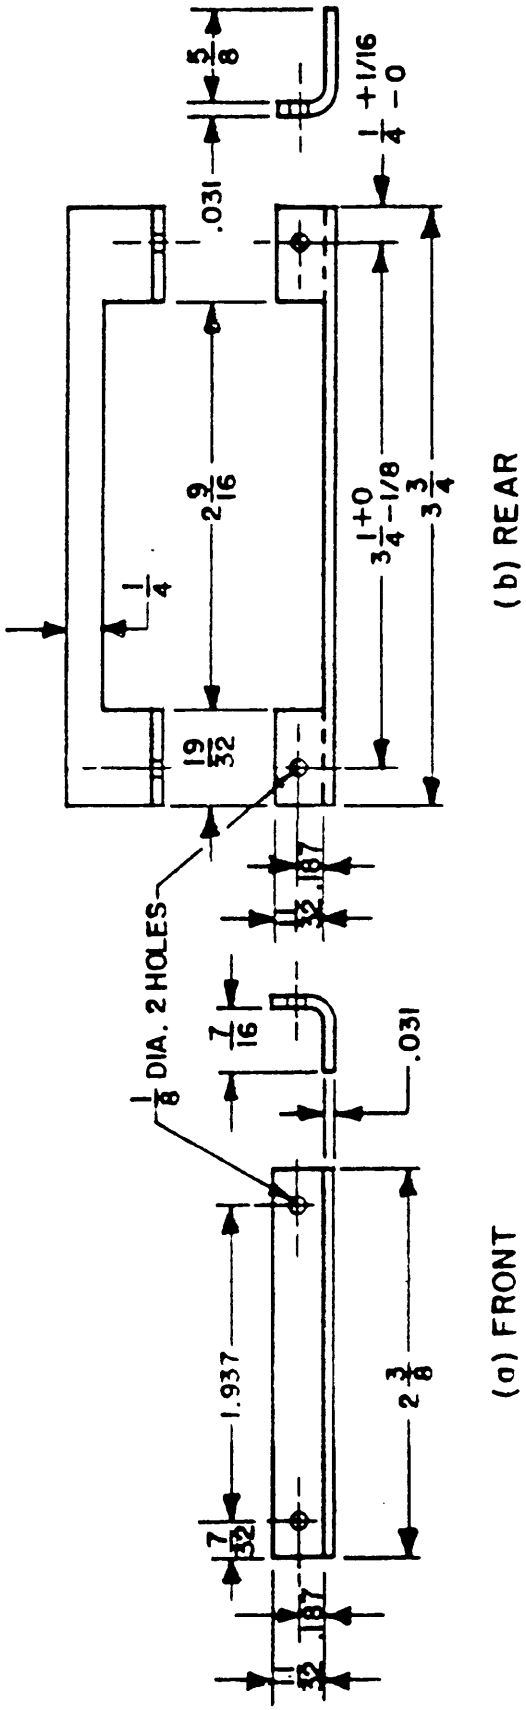



FIGURE 16. Battery contact connectors.

SH 10257


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

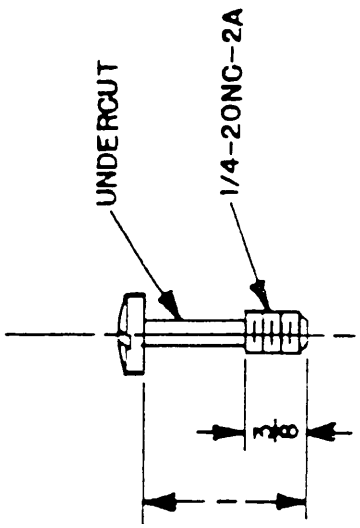

(b) COVER SCREW
MATERIAL: BRASS

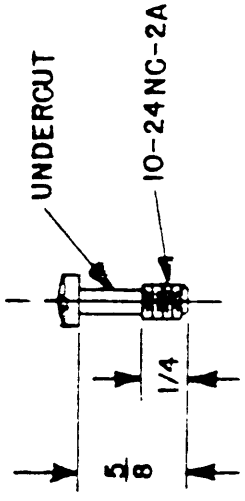

(a) LAMP RETAINER SCREW
MATERIAL: BRASS

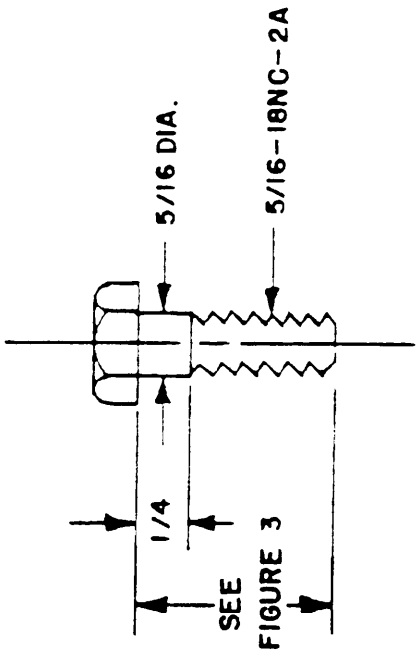

(c) MOUNTING BOLT
MATERIAL: STEEL

FIGURE 17. Screws and bolts.

SH 10258

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.


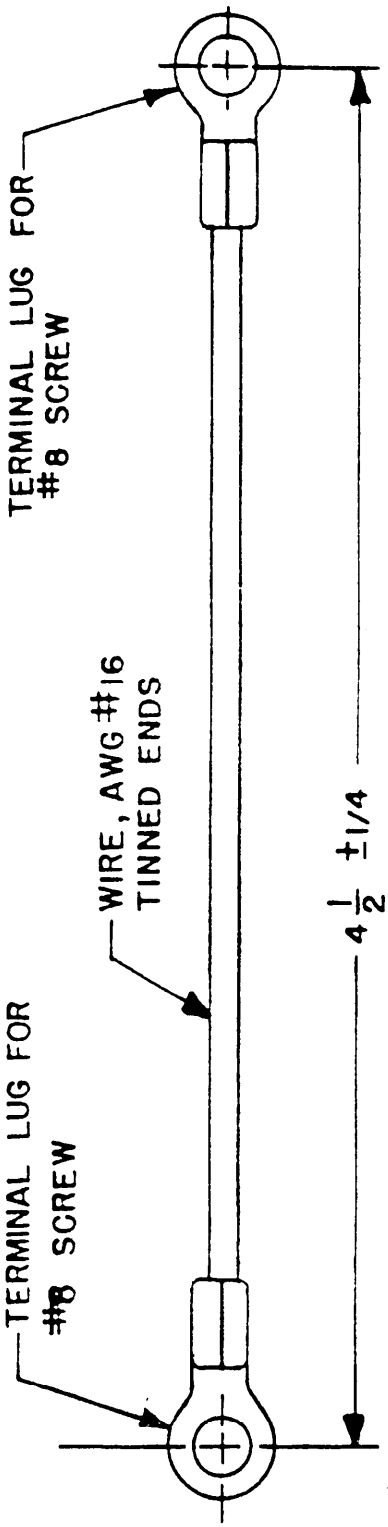


FIGURE 18. Wire assembly.

SH 10259

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

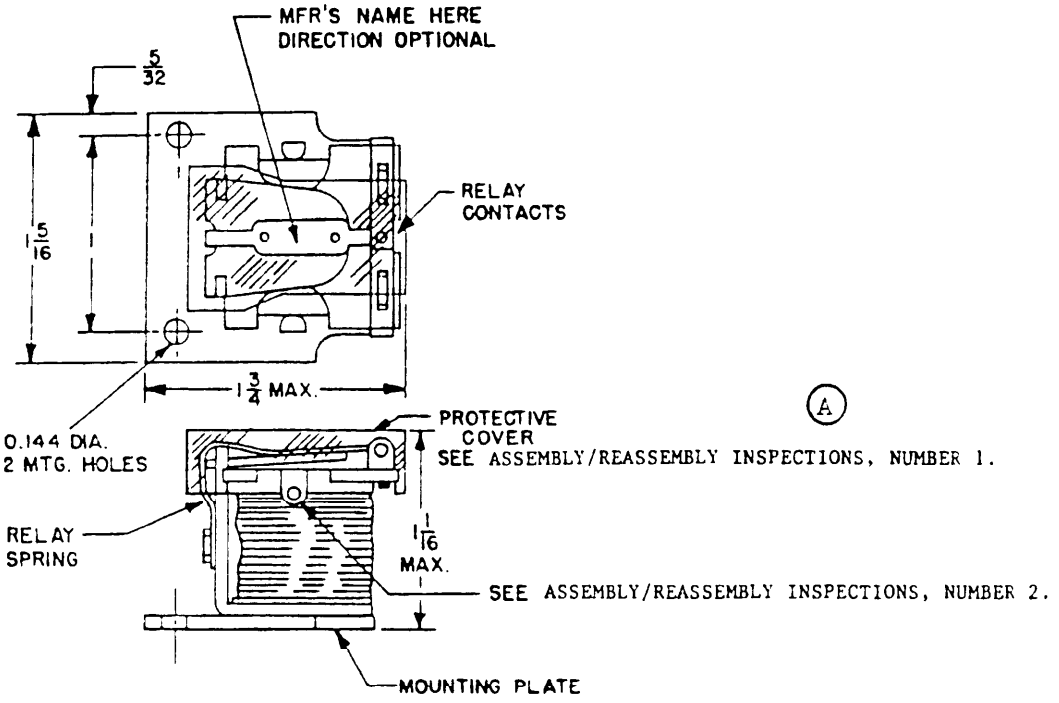

(A) TABLE I. Relay contact and coil ratings. (A)
(See figure 20 for schematic)

(A) Characteristic	115 Vac	115 Vdc	230 Vdc (See option)
Frequency	60 Hz	---	---
Duty	Continuous	Continuous	Continuous
(A) Operating voltage	125 max	125 max	250 max
(A) Coil rating	115 volts	115 volts	230 volts
Pull-in voltage	60-100 max	60-100 max	120-200 max
Drop-out voltage	70-30 min	70-30 min	140-60 min
Contact rating	2 amps, 6 volts	2 amps, 6 volts	2 amps, 6 volts
(A) Service life	100,000 cycles	100,000 cycles	100,000 cycles
Contact resistance	0.1 ohm max	0.1 ohm max	0.1 ohm max
Insulation resistance	100 megohms min	100 megohms min	100 megohms min
Dielectric strength	1000 V rms	1000 V rms	1000 V rms
(A) Coil resistance	3000 ohms	12,000 ohms	See option

FIGURE 19. Relay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

(A) OPTION:

1. For 230 Vdc operation, the 115-Vdc relay with 12,000 ohm, 2 watt resistor in series with coil may be used.

(A) REQUIREMENTS:

1. Relays shall conform to the design shown and to the following tests:

   (a) Insulation resistance - 100 megohms minimum between coil and contacts and to ground (moving contact grounded).
   (b) Dielectric - 500 Vac rms between contacts, 1000 Vac rms between coil and contacts and coil to ground.
   (c) Contact resistance - 0.1 ohm maximum.
   (d) Contact and coil ratings shall be as specified in table I.
   (e) Vibration - relays shall be tested for type I vibration in accordance with MIL-STD-167-1. The relay shall be energized and de-energized for 1 hour each in each of three mutually perpendicular planes.
   (f) Shock - relays shall withstand the shock test for grade A, type A equipment in accordance with MIL-S-901, without contact chatter in excess of 100 microseconds.
   (g) Salt spray - relays shall be tested in accordance with method 101, test condition B, of MIL-STD-202. After test, relay shall be washed, shaken and air blasted and then allowed to dry for 24 hours. Relays shall then be examined for corrosion and exposure of base metal.
   (h) Moisture resistance - relays shall be exposed to a 100-hour humidity test as follows: Assemblies shall be placed in a chamber at a temperature of 50°C at a relative humidity of 90 to 100 percent (dew point reached at least once each 24 hours). A 225 ± 25 volt source of dc shall be provided. One coil terminal shall be connected to the positive source and the negative shall be attached to the frame. After the test, coil resistance shall still be as required.
   (i) The relay shall function satisfactorily in an ambient temperature varying from minus 30 to plus 160°F.


(A) ASSEMBLY/REASSEMBLY INSPECTIONS:

(A) 1. A protective cover shall be provided over the relay contacts and the relay spring. (See figure 11).

(A) 2. Relays shall be furnished with 2-inch wire leads, AWG number 20 or larger, stranded, thermoplastic, for connecting the relay coil to the supply cable and to switch off the relay assembly. Shrink-on insulation sleeves shall be placed over the 120 volt and over (A) electrical connections to ensure that no metallic or conducting parts shall be exposed.

FIGURE 19. Relay - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

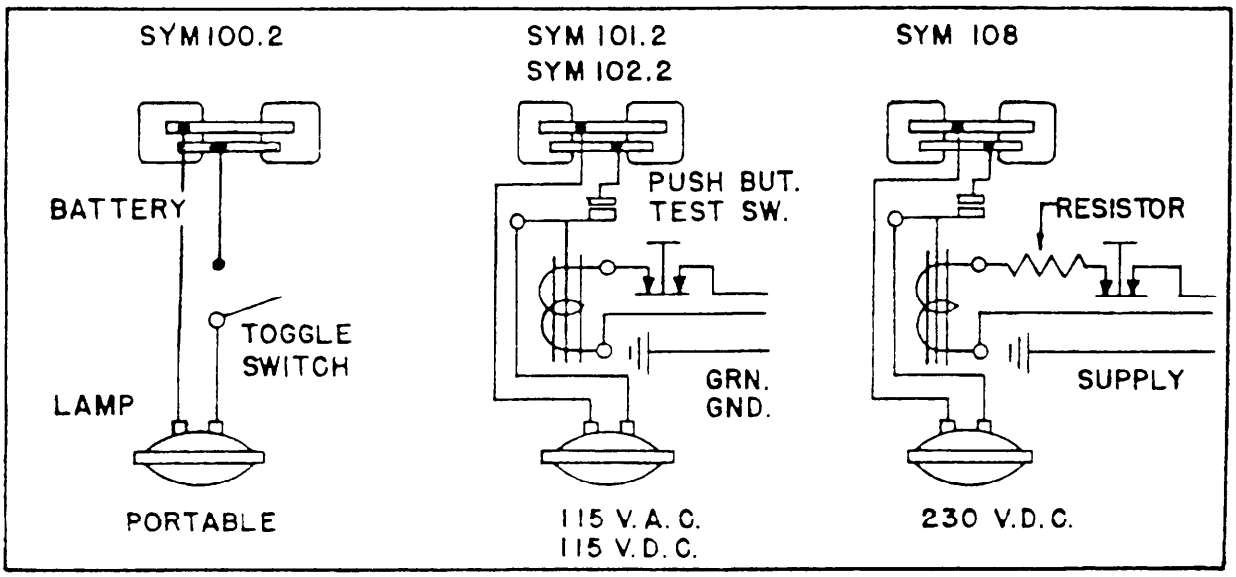

SH 10261

FIGURE 20. Wiring diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Type:	II
Class:	1
Symbol 100.2:	Lantern, portable, with handle and mounting bracket.
Symbol 101.2:	Lantern, relay, 115 Vac.
Symbol 102.2:	Lantern, relay, 115 Vdc.
Symbol 108:	Lantern, relay, 230 Vdc.
Design:	
Dimensions and configurations:	See figures 1 through 20.
Material:	
Box, cover, lamp retainer and relay housing:	Material for box, cover lamp retainer and relay housing shall be molded plastic. The color of molded parts shall be yellow conforming to color number 13415 of FED-STD-595 attained without resort to painting, enameling or other post-molding applications. Plastic material shall be type MAI-60 of MIL-M-14 or one of the following: Fiberite number X5064, Glaskyd number 1902, Plaskon number 446, Raflon number 1030, or equal.
Screws:	All screws shall be brass.
Lockwashers:	All lockwashers shall be phosphor-bronze, internal-lock.
Inserts:	All inserts shall be brass.
Lantern assembly (complete) and typical mounting:	See figures 1 and 2.
Body assembly:	See figure 3. All parts shown on figure 3 shall be furnished assembled as indicated.
Bolts:	Gaskets or bolts with self-contained gaskets such as "steel-bolts" shall be furnished so as to seal the mounting holes against the entrance of water when the body is assembled and mounted in the condition shown on figure 2.
Mounting bolts:	Mounting bolts shall be as shown on figures 3 and 17.
O-ring:	O-ring gaskets shall be furnished to seal the mounting holes against the entrance of water when the body is assembled and mounted in the condition shown on figure 2.
Lamp:	Lamp shall be incandescent, sealed beam, PAR 36, Industry number 4546, conforming to MS16524-2. Lamp shall be furnished.
Lamp contact assembly:	See figure 15. The plunger shall work freely in the sleeve without rubbing or coming adrift.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

Battery contact connectors:	See figure 16. Material shall be brass, half hand. Battery contact connectors shall be silver plated.
Box, cover and lamp-retainer:	See figures 7, 8, and 9 respectively.
Wire assembly:	See figure 18.
Gasket, lamp:	See figure 12. Material shall be neoprene rubber, 45-55 durometer.
Gasket, cover:	See figure 14. Material shall be neoprene rubber, 45-55 durometer.
Handle assembly:	See figure 4. All parts shown on figure 4 shall be furnished assembled as indicated.
(A) Switch:	Switch shall be toggle, DPST, conforming to MS16656-2.
(A) Boot:	Boot shall be type A, style 3 of MIL-B-5423/2.
Gasket:	See figure 13. Material shall be neoprene rubber 45-55 durometer.
Bracket assembly:	See figure 5. Material shall be steel; zinc or cadmium plated.
Relay assembly:	See figure 6. All parts shown on figure 6 shall be furnished assembled as indicated.
Cable:	Cable shall be 10 feet of type SJT or SJO, AWG No. 16, three conductor (white, black, green), in accordance with J-C-580.
Cap:	Cap shall be in accordance with MIL-S-19622/10-0002 of MIL-S-19622/10.
(A) Packing assembly:	Packing assembly shall be in accordance with MIL-S-19622/17-0002 of MIL-S-19622/17.
(A) Switch:	Switch shall be pushbutton, SP-NC, double break, snap in accordance with MIL-S-8805/20, except that it shall be one circuit furnished without the nut and lockwasher.
Boot:	Boot shall be type B, style 2, size 3 of MIL-B-5423/7.
Relay housing:	See figure 11.
Gasket:	See figure 13. Material shall be neoprene rubber 45-55 durometer.
Relay:	See figure 19.
Wire assembly:	See figure 18.
Ground connection:	The metal neck of the pushbutton switch and the relay metallic frame shall be electric ally connected to the green lead of the supply cable for grounding to ships structure.
Wiring:	Interconnecting and power leads shall be soldered on switch and relay terminals. The connections shall be mechanically secure and electrically continuous after soldering.
Insulating sleeve:	Shrink-on insulating sleeves shall be installed over all electrical connections carrying 120 or higher voltage. No metallic parts of such connections shall be exposed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

		Insulating sleeves shall not be loose or allowed to move. Insulating sleeves are not required for ground connections or electrical connections of the battery circuit.
(A)	Batteries:	Lanterns shall accommodate two batteries in parallel, type BA-200/U of MIL-B-18/34. Batteries are not furnished.
	Enclosure:	Watertight-complete lanterns.
	Weight:	
	Symbol 100.2:	5 lbs., 9 oz. maximum without batteries.
	Symbols 101.2, 102.2 and 108:	6 lbs., 8 oz. maximum without batteries.
	Labels:	Labels shall be furnished in accordance with MIL-F-16377. The following labels and information shall be furnished:
	Type I - See MIL-F-16377.	
	Type III - Wiring diagram of figure 20.	
(A)	Type IV - "USE FOLLOWING REPAIR PARTS	
	Lamp	MS16524-2
	Boot for toggle switch	M5423/02
	Boot for pushbutton switch	M5423/07-003
	Toggle switch	MS16656-2
	Pushbutton switch	M8805/20"
Quality assurance:		Quality assurance shall be as specified in MIL-F-16377 and as follows:
First article inspection:		
Body assembly:		See table II.
Handle assembly:		See table II.
Bracket assembly:		Examination only.
Relay assembly:		See table II.
Quality conformance:		
Comparison inspection:		Same as the first article inspection.
Inspection of product for delivery:		
Examination:		See MIL-F-16377.
Examination for packaging:		See MIL-F-16377.
Quality conformance tests:		See MIL-F-16377.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

(A) TABLE II. First article and comparison inspection for body and handle assembly.

Inspection	Remarks 1/
Examination	
Operation	
Enclosure effectiveness	Watertight
Shock	
Vibration	
Enclosure effectiveness	Watertight

1/ For test purposes, body or handle assembly shall be assembled and mounted as shown on figure 2 for symbol 100.2. Batteries shall be installed for the operation, shock and vibration tests.

(A) TABLE III. First article and comparison inspection for relay assemblies.

Inspection	Remarks 1/
Examination	
Operation	
Dielectric withstanding voltage	
Insulation resistance	
Enclosure effectiveness	Watertight
Shock	
Vibration	
Enclosure effectiveness	Watertight
Dielectric withstanding voltage	
Insulation resistance	
Grounding circuit	

1/ Relay assemblies shall be assembled and mounted as shown on figure 2. Batteries shall be installed for the operation, shock and vibration tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.

General information:

(a) Assignment of Military part numbers and general information shown in table IV.

(A) TABLE IV. Part number and general information.

Military part number M16377/53	Item name	Supersedes part number	Remarks
-100.2	Complete lantern, symbol 100.2	MS17231-100.2	1/, 5/
-101.2	Complete lantern, symbol 101.2	MS17231-101.2	2/, 5/
-102.2	Complete lantern, symbol 102.2	MS17231-102.2	3/, 5/
-108	Complete lantern, symbol 108	MS17231-108	4/, 5/
001	Body assembly	MS17231-1	
002	Handle assembly	MS17231-2	
003	Bracket assembly	MS17231-25	
004	Relay assembly, 115 Vac	MS17231-3	
005	Relay assembly, 115 Vdc	MS17231-4	
006	Relay assembly, 230 Vdc	MS17231-5	
007	Cover gasket, figure 14	MS17231-12	

1/ Symbol 100.2 consists of part numbers: M16377/53-001, M16377/53-002 and M16377/53-003.

2/ Symbol 101.2 consists of part numbers: M16377/53-001 and M16377/53-004.

(A) 3/ Symbol 102.2 consists of part numbers: M16377/53-001 and M16377/53-005.

4/ Symbol 108 consists of part numbers: M16377/53-001 and M16377/53-006.

5/ Lanterns are not furnished as complete units. Complete lanterns shall be assembled using the component parts indicated.

(a) Lanterns are intended to be mounted on board ship as shown on figure 2.

(b) Lanterns over surgical tables on board ship are intended to be mounted using the adjustable bracket shown on MIL-F-16377/55.

(c) Color filters, MIL-F-16377/46, shall be used to convert white (clear) light lanterns into colored light lanterns.

(d) Superseding data: These lanterns were formerly covered by MS17231 and Drawing 815-74434 and 9-S-5293-L.

Preparing activity:
Navy - SH
(Project 6230-N314)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:50Z
Check the source to verify that this is the current version before use.