MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; FLUORESCENT, DETAIL LIGHTING FOR MIRRORS

30 WATTS, 120 VOLTS, 60 HERTZ, DRIPPROOF, SYMBOLS 351, 351.1, 352 AND 352.1

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

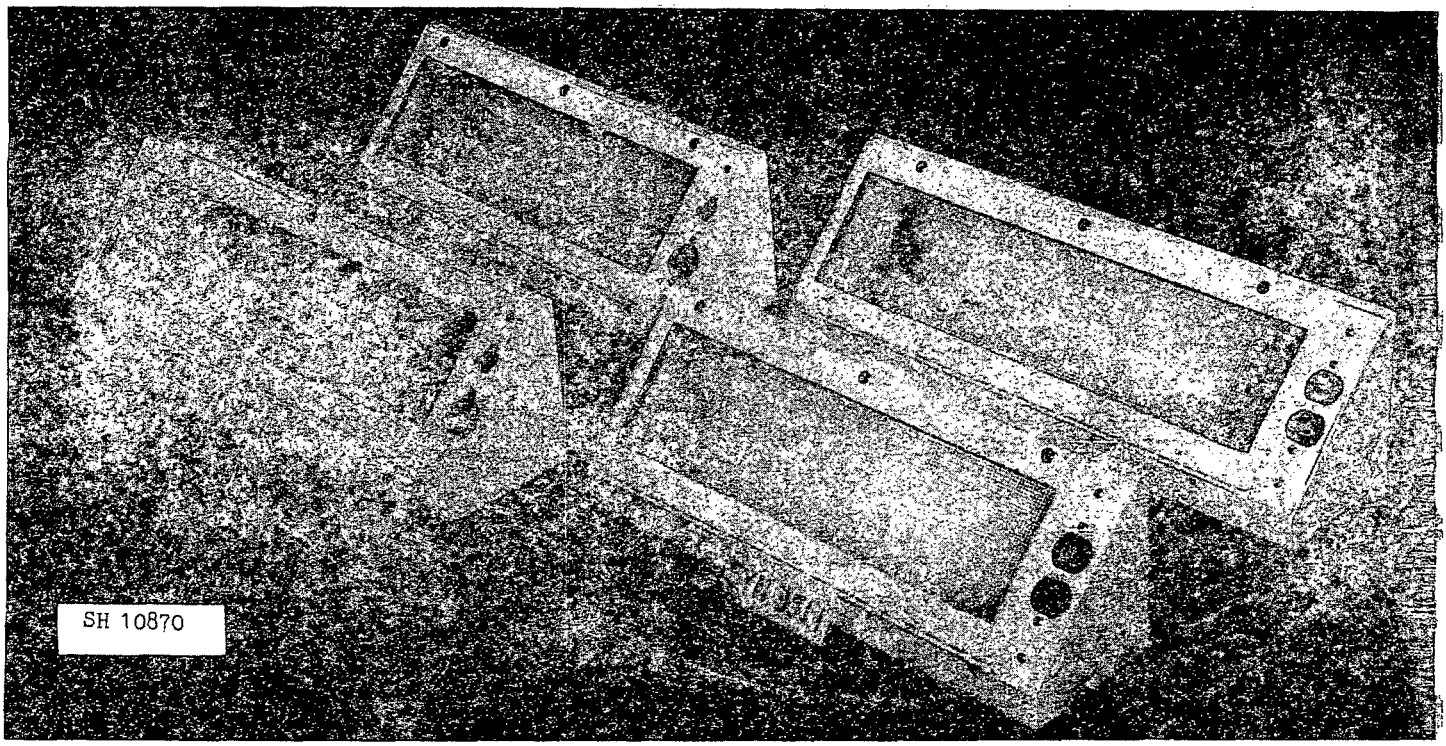


FIGURE 1. Typical view of Symbols 351, 351.1, 352 and 352.1.

All dimensions in inches.
For tolerances other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

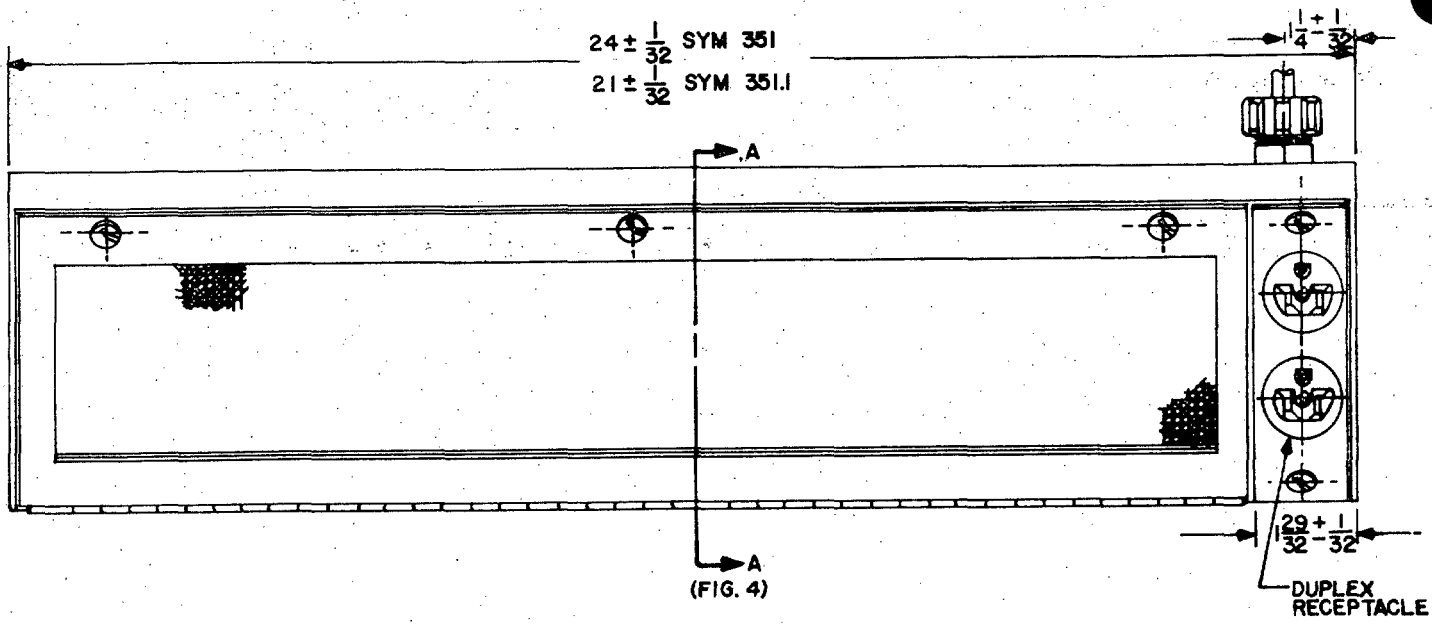


FIGURE 2. Typical front view of symbol 351 and 351.1.

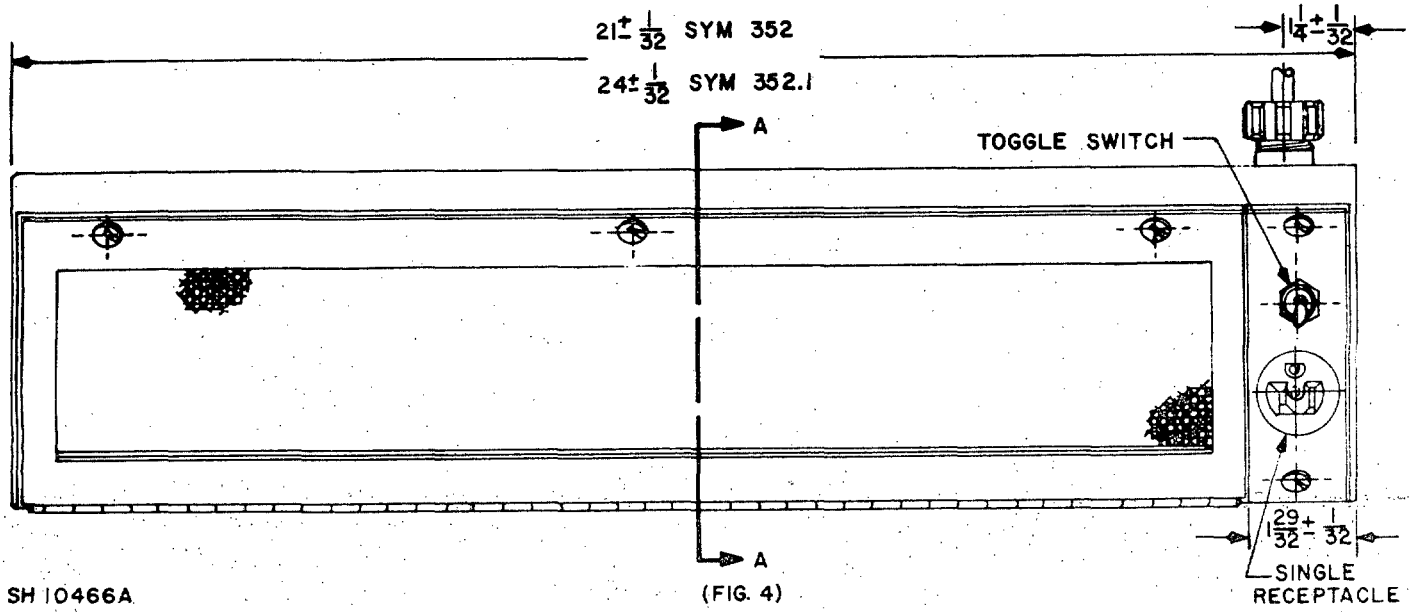


FIGURE 3. Typical front view of symbol 352 and 352.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.



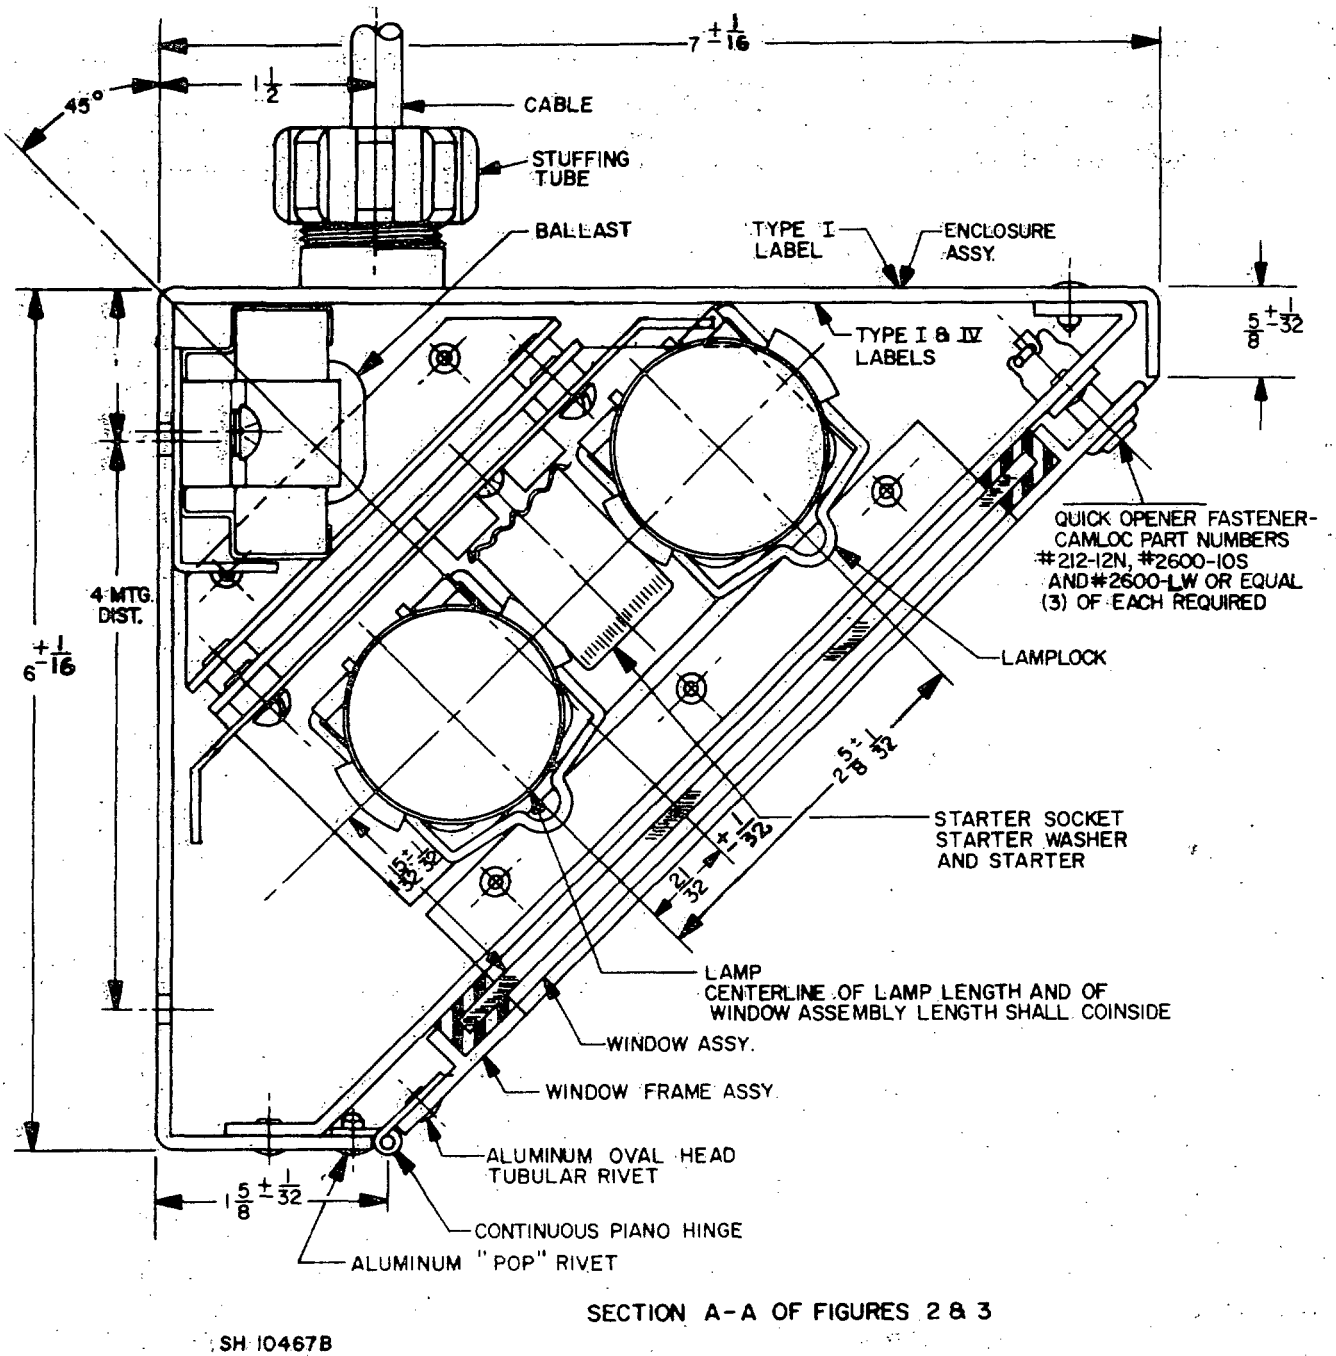


FIGURE 4. Typical section view.


Source: https://assist.dla.mil -- Downloaded: 202610-18T08:51Z
Check the source to verify that this is the current version before use.

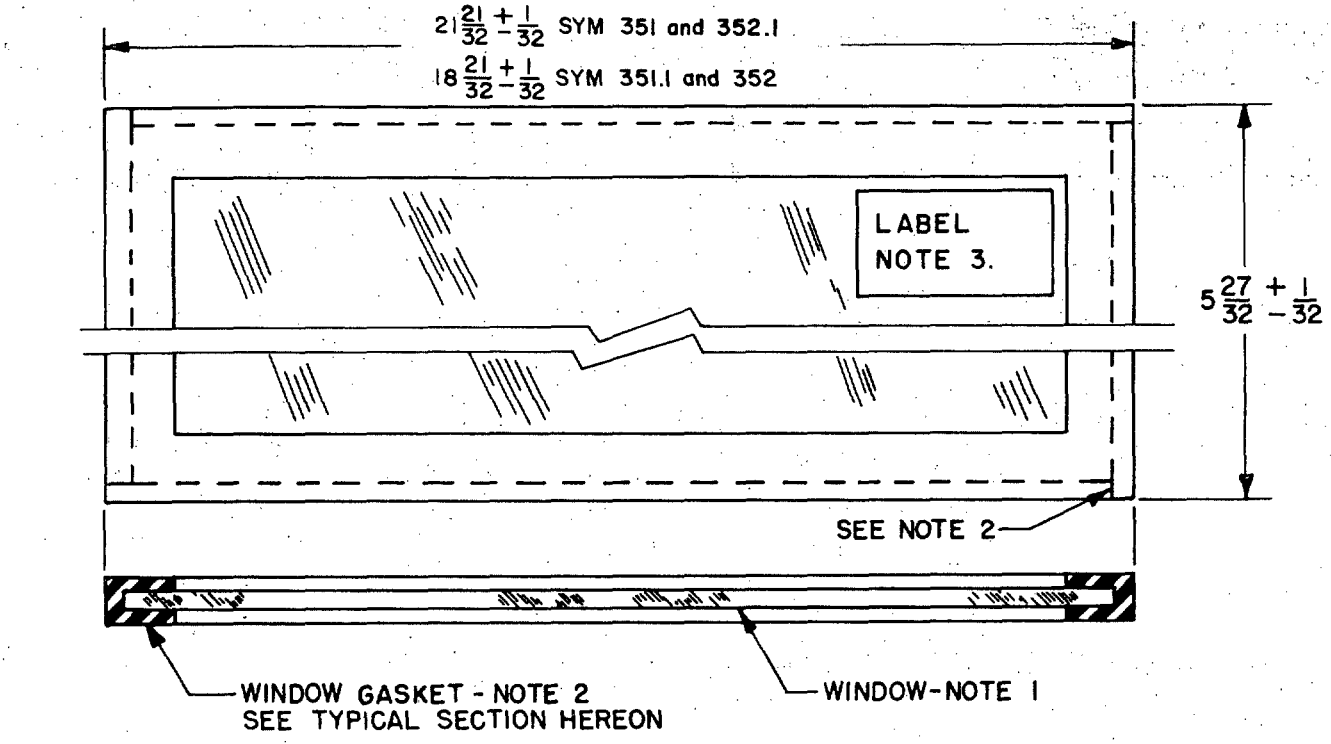

(a) Window Assembly

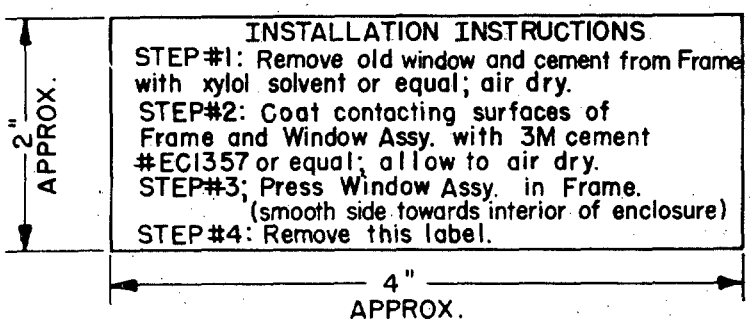

(b) LABEL - Note 3.

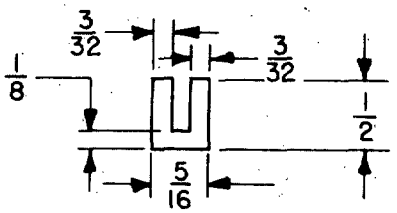

STANDARD RMA TOLERANCES FOR EXTRUSION SHALL APPLY

(c) GASKET-Typical Section


SH 10468

NOTES:

1. Material for window shall be 1/8 inch thick, clear, prismatic (one side only), heat resistant, cast acrylic plastic sheet, type CLEAR-2 of MIL-P-24191.
2. Material for window gasket shall be neoprene rubber 25-35 durometer. Gasket shall be cemented to window. Gasket may be furnished in segments.
3. For window assemblies furnished as repair parts, a type IV label shall be furnished in accordance with MIL-F-16377. Location and the information to be shown on this label shall be as shown hereon.
4. Window Assembly shall be cemented to window frame.

FIGURE 5. Figure assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:51Z
Check the source to verify that this is the current version before use.

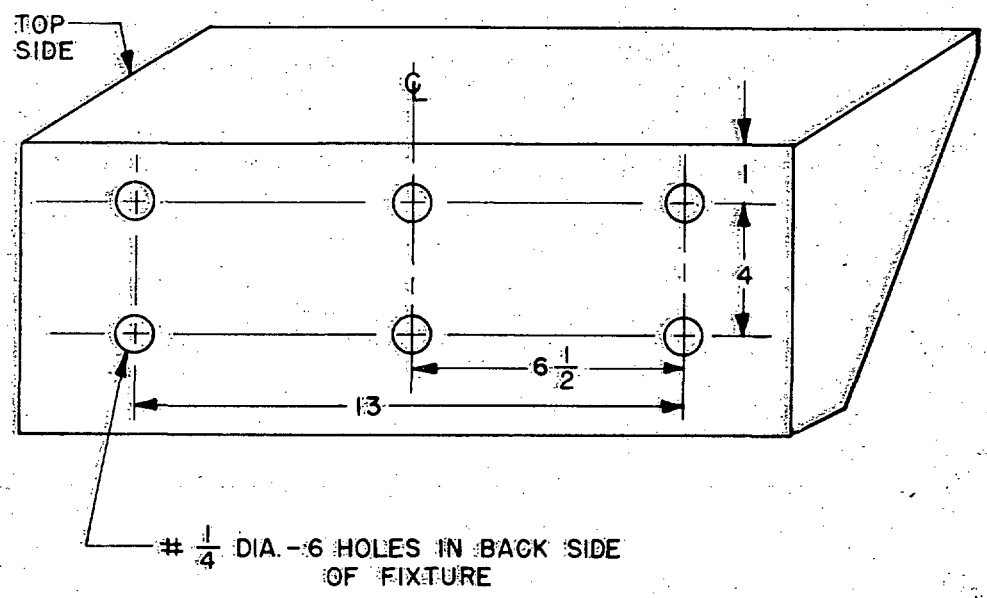


SH 10463


NOTE: MOUNTING BOLTS SHALL BE # 12
THREAD FORMING SCREWS

FIGURE 6. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:51Z
Check the source to verify that this is the current version before use.

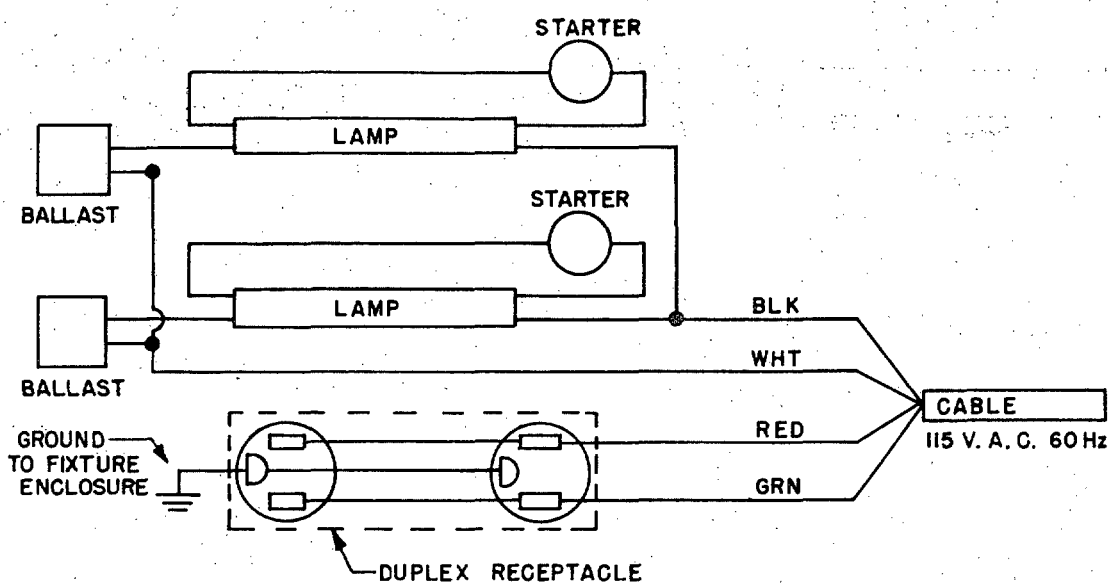

SYMBOLS 351 and 351.1

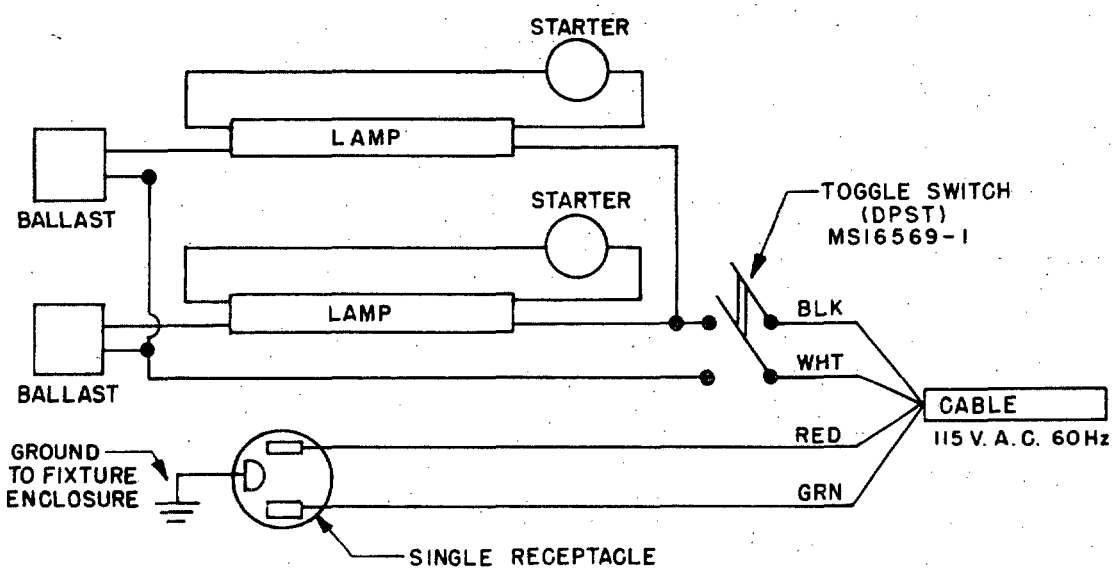


SH 10464

SYMBOLS 352 and 352.1

FIGURE 7. Wiring diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

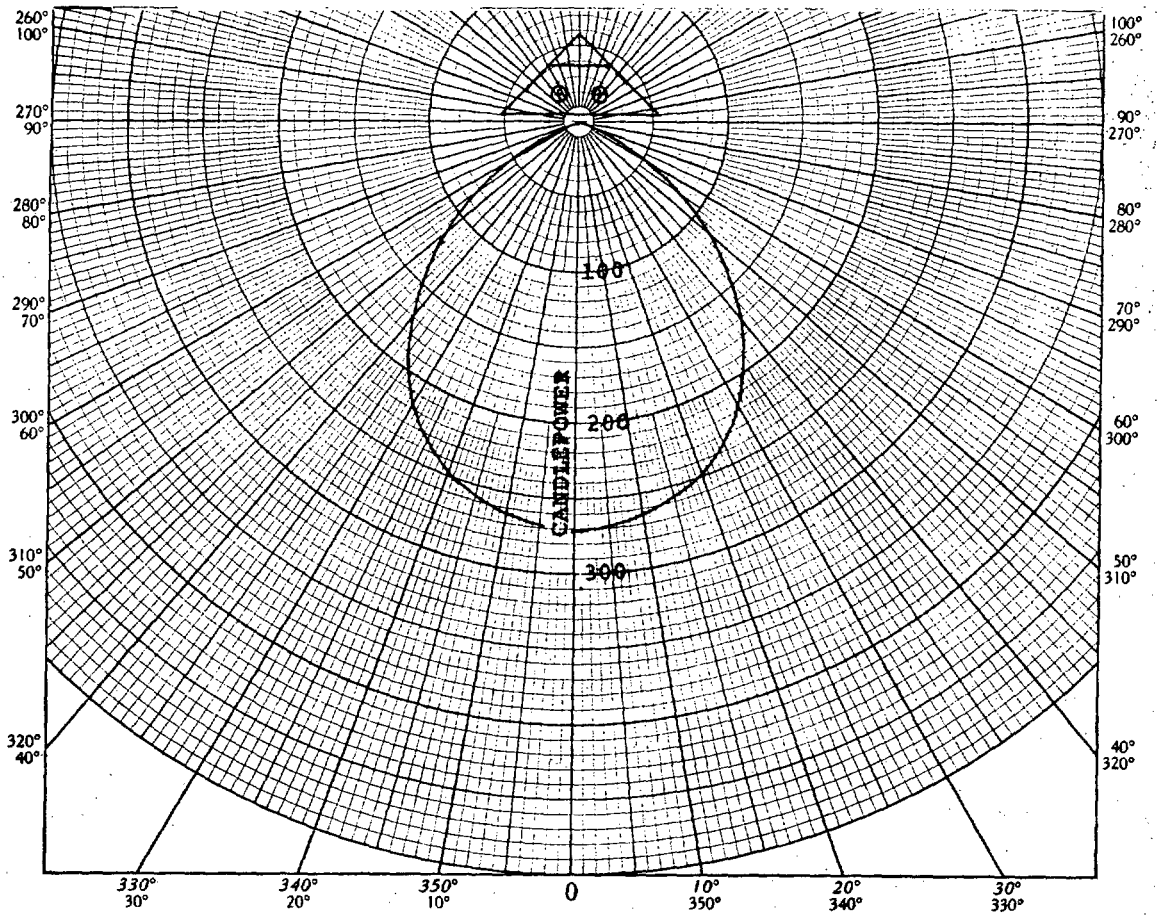

ANGLE	CANDLEPOWER SYMBOLS 351, 351.1, 352, 352.1
0	273
5	270
10	267
15	258
20	250
25	232
30	220
35	202
40	174
45	145
50	116
55	80
60	58

ANGLE	CANDLEPOWER SYMBOLS 351, 351.1, 352, 352.1
65	46
70	23
75	12
80	6
85	0
90	0
95	0
100	0
105	0
110	0
115	0
120	0
125	0

Photometric test data:

Distance - - - 10 feet.
Plane - - - - At right angles to long axis of fixture through geometric center of lamp.
Voltage - - - 115 volts, 60 Hz.
Ambient temperature - - - 76°F.
Lamps - Use lamps furnished with fixtures seasoned for at least 100 hours.
Ballast - Use ballast furnished with fixture.
Lamp Correction - - - Distribution curves based on 790 lumens per lamp.

FIGURE 8. Candlepower distribution curves.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: I
Class: 1

SYMBOL NUMBERS:
Symbol 351: Complete fixture 24 inches in length with two 15-watt cool white fluorescent lamps, clear prismatic window, and duplex receptacle.
Symbol 351.1: Same as Symbol 351 except 21 inches in length.
Symbol 352: Complete fixture 21 inches in length with two 15-watt cool white fluorescent lamps, clear prismatic window, and with toggle switch and single receptacle.
Symbol 352:1: Same as Symbol 352 except 24 inches in length.

DESIGN:
Electrical rating: 30 watts, 120 volts, 60 Hertz.
Dimensions and configuration: See figures 1 through 4.
Window assembly: See figure 5.
Mounting diagram: See figure 6.
Wiring diagram: See figure 7.
Distribution curves: Candlepower - see figure 8.
Cable: 10 feet of type SJO or SJT, construction in accordance with J-C-580 except AWG16, 4 conductor (black, white, red, green).
Receptacle for symbols 351 and 351.1: Receptacle shall be in accordance with W-C-596/12 and NEMA WD-1 (Industry No. 5262) except that the ground contact and mounting strap shall be nickel-plated 0.0003 inch thick.
Receptacle for Symbols 352 and 252.1: Receptacle shall be of W-C-596/11 and NEMA WD-1 (Industry No. 5284) except that ground contact and mounting strap of receptacle shall be nickel-plated, 0.0003 inch thick.
A "U" shaped electrical insulation paper (fish paper, 0.015 thick, NEMA VU) shall be placed around the receptacles to isolate the electrical connections from the light housing.
Finish: Complete fixtures to be finished as same as for type I, class 2 fixtures of MIL-F-16377.
Switch for symbols 352, and 352.1: Switch shall be toggle, DPST, in accordance with MS16569-1.
Enclosure: Dripproof 15 degrees.
Weight:
Symbols 351 and 352.1: 12 lbs 0 oz. maximum.
Symbols 351.1 and 352: 11 lbs 8 oz. maximum.
Designation and marking: The following labels shall be furnished in accordance with MIL-F-16377 applied as shown in figures 1 and 3:

(a) Two type I.
(b) One type IV. The information to be shown on the type IV label shall be "USE THE FOLLOWING REPAIR PARTS ONLY." List all standard parts shown in table I and window assemblies of table IV by name and stock number only.

Standard Parts: The standard parts shown in table I shall be used in the construction of the fixtures specified herein.

QUALITY ASSURANCE:

First article inspection:
Complete fixtures: See table II.
Window assemblies: See table III.
Quality conformance: Same as the first article inspection.
Comparison inspection: Same as the first article inspection.
Inspection of product for delivery:
Examination: See MIL-F-16377.
Examination for preparation of delivery: MIL-F-16377.
Quality conformance tests: See MIL-F-16377.

GENERAL INFORMATION

Assignment of Military part numbers and general information is shown in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

TABLE I. Standard parts.

Name	Specification or Military Part Number	National Stock Number (NSN)	Remarks
Lamp	W-L-116/13	6240-00-583-3668	Industry number F15T12/CW
Lamp lock	M16377/40-002	6250-00-899-7040	---
Lampholder	MIL-L-970/11	6250-00-284-0481	---
Startersocket	MIL-L-970/13	6250-00-295-2738	---
Starter	8W, type III of W-S-755	6250-00-299-2884	Commercial designation: FS2
Ballast	M16377/44-001	6250-00-569-9502	---
Switch, Toggle, DPST	MS16569-1	5930-00-719-9659	---

TABLE II. First article and comparison inspection for complete fixtures.

Tests	Requirement paragraph of MIL-F-16377	Test paragraph of MIL-F-16377	Remarks
Examination	3.13	4.5	---
Operation	3.13	4.8.1	---
Dielectric withstanding voltage	3.6.15	4.8.2	---
Insulation resistance	3.6.16	4.8.3	---
Enclosure effectiveness	3.5.11	4.8.14.2	Dripproof 15 degrees
Shock	3.5.12	4.8.7	---
Vibration	3.5.13	4.8.8	---
Enclosure effectiveness	3.5.11	4.8.14.2	Dripproof 15 degrees
Dielectric withstanding voltage	3.6.15	4.8.2	---
Insulation resistance	3.6.16	4.8.3	---
Noise	3.5.14	4.8.9	---
Continuity of grounding	3.6.13.4	4.8.12	---
Optical uniformity	3.7.4.1.1	4.8.4	---
Light output	3.7.1	4.8.6	Candlepower
Magnetic permeability	3.4.8	4.8.18	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

TABLE III. First article and comparison inspection for window assemblies.

Tests	Requirement paragraph of MIL-F-16377	Test paragraph of MIL-F-16377	Remarks
Examination	3.13	4.5	---
Optical uniformity	3.7.4.1.1	4.8.4	---

TABLE IV. Part number and general information.

Military Part number M16377/58-	Item Name	National Stock Number (NSN)	Remarks
351	Complete fixture, symbol 351	6210-00-115-9171	Figure 1
351.1	Complete fixture, symbol 351.1	6210-01-044-5273	Figure 1
352	Complete fixture symbol 352	6210-00-115-9137	Figure 1
352.1	Complete fixture symbol 352.1	6210-01-045-7724	Figure 1
001	Window assembly symbols 351 and 352.1	6210-00-115-9197	Figure 5
002	Window assembly symbols 351.1 and 352	6210-01-047-0209	Figure 5

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 6210-N589)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.