INCH-POUND

MIL-F-16377/58B(SH)
AMENDMENT 1
2 August 1996

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; FLUORESCENT, DETAIL LIGHTING FOR MIRRORS
30 WATTS, 120 VOLTS, 60 HERTZ, DRIPPROOF
SYMBOLS 351, 351.1, 352 AND 352.1

This amendment forms a part of MIL-F-16377/58B(SH), dated 11 April 1983, and is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Page 5/6.

PAGE 3

Figure 4: Add the following: "NOTE: Dimensions shown may be modified to accomodate ballast. Critical dimensions (mounting, window area, lamp spacing, etc.) must be maintained".

PAGE 8

DESIGN: Cable: Delete and substitute:

"Cable: 10 feet of type LSFHOF-3 in accordance with MIL-C-24643/3."

DESIGN: Receptacle for Symbols 351 and 351.1: After "nickel-plated" delete "0.0003 inch thick".

AMSC N/A FSC 6210
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

DESIGN: Receptacle for Symbols 352 and 352.1: Delete "W-C-596/11 and NEMA WD-1", the parentheses around "Industry No. 5284", and, after "nickel-plated", "0.0003 inch thick".

DESIGN: Weight: Symbols 351 and 352.1: Delete "0 oz." and substitute "6 oz.".

DESIGN: Weight: Symbols 351.1 and 352: Delete "8 oz." and substitute "14 oz.".

PAGE 9

Table I, Lampholder: Delete "MIL-L-970/11" and substitute "UL-542". Add to "Remarks" column "SUPP. SA, FIG. SA2.2".

Table I, Startersocket: Delete "MIL-L-970/13" and substitute "UL-542". Add to "Remarks" column "SUPP. SA, FIG. SA2.4".


Table I, Starter: Delete "8W" and substitute "20W".

Table I, Ballast: Delete "M16377/44-001" and substitute "M16377/72-001".

Preparing activity:
Navy - SH
(Project 6210-N661-10)



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

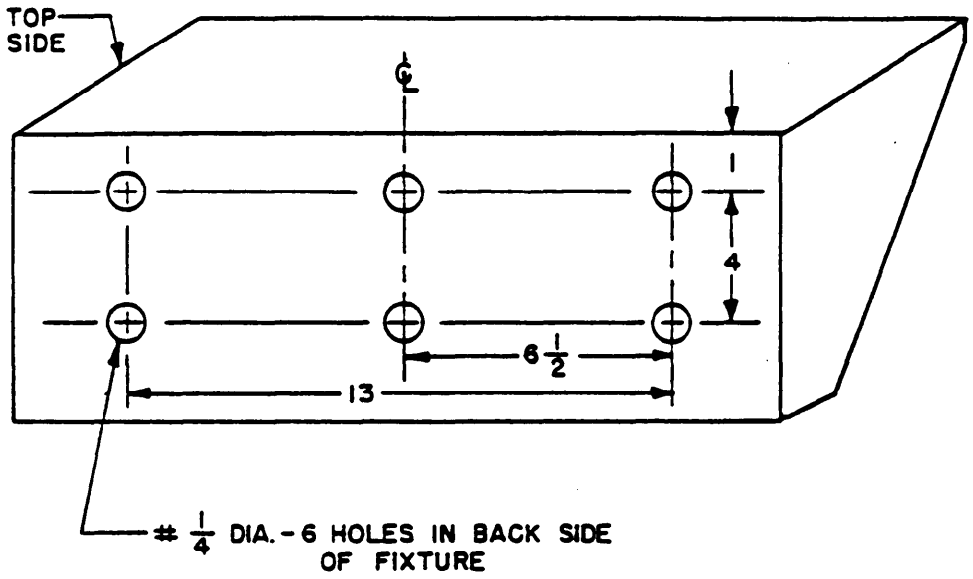



NOTE: MOUNTING BOLTS SHALL BE # 12 THREAD FORMING SCREWS

FIGURE 6. Mounting dimensions.


Reprinted without change.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

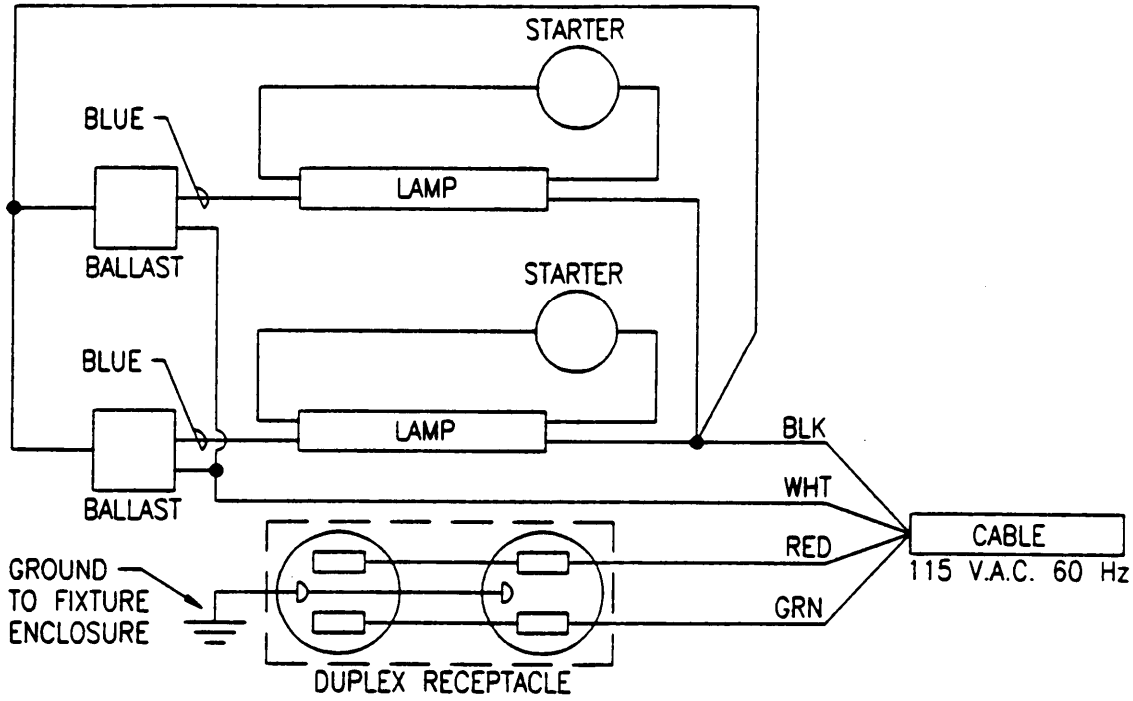


SYMBOLS 351 AND 351.1

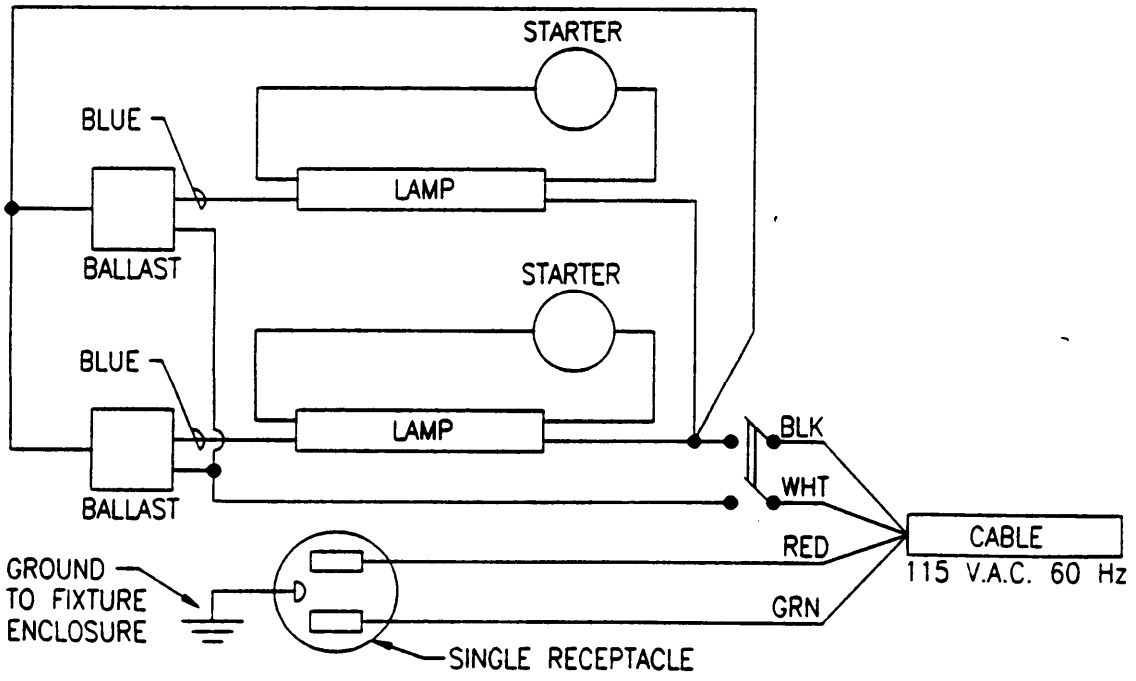


SYMBOLS 352 AND 352.1

FIGURE 7. Wiring diagram.

Supersedes page 6 of MIL-F-16377/58B(SH) of 11 April 1983.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.