MIL-F-16377/60A(SH)
11 April 1983
SUPERSEDING
MIL-F-16377/60(SHIPS)
4 June 1975

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, FLOODLIGHTS, 150 WATTS, 120 VOLTS, DRIPPROOF 15 DEGREES, SYMBOLS 316 AND 317

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

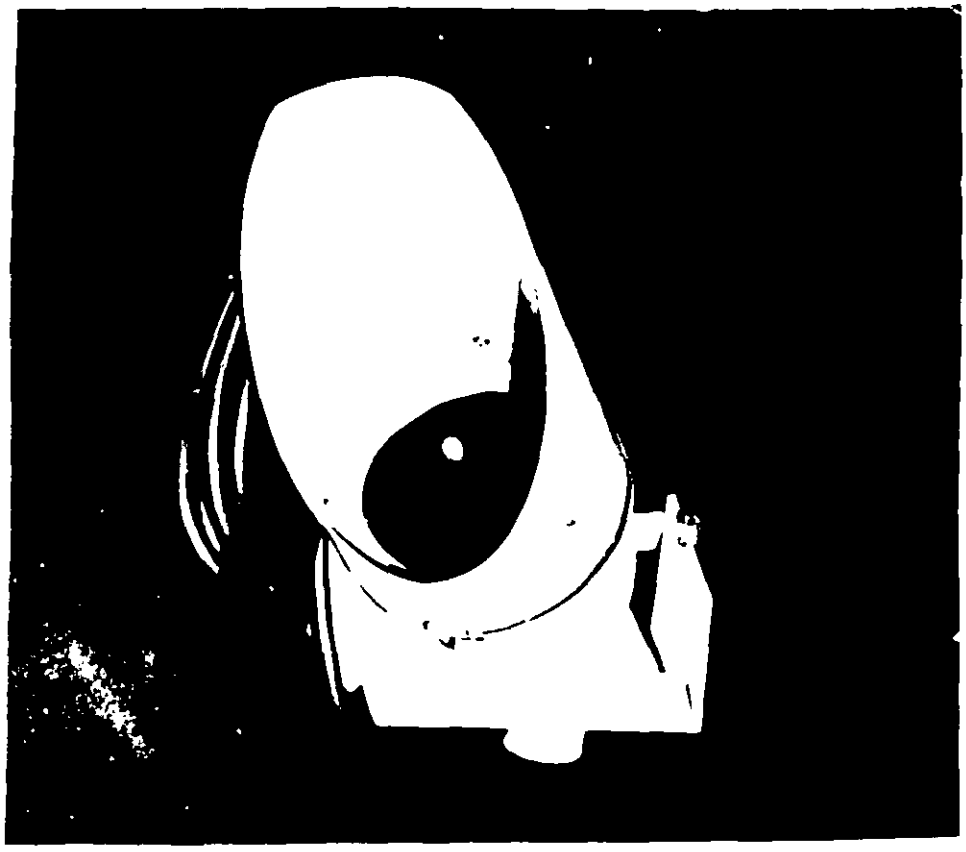


FIGURE 1. Typical view of Symbols 316 and 317.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6230

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

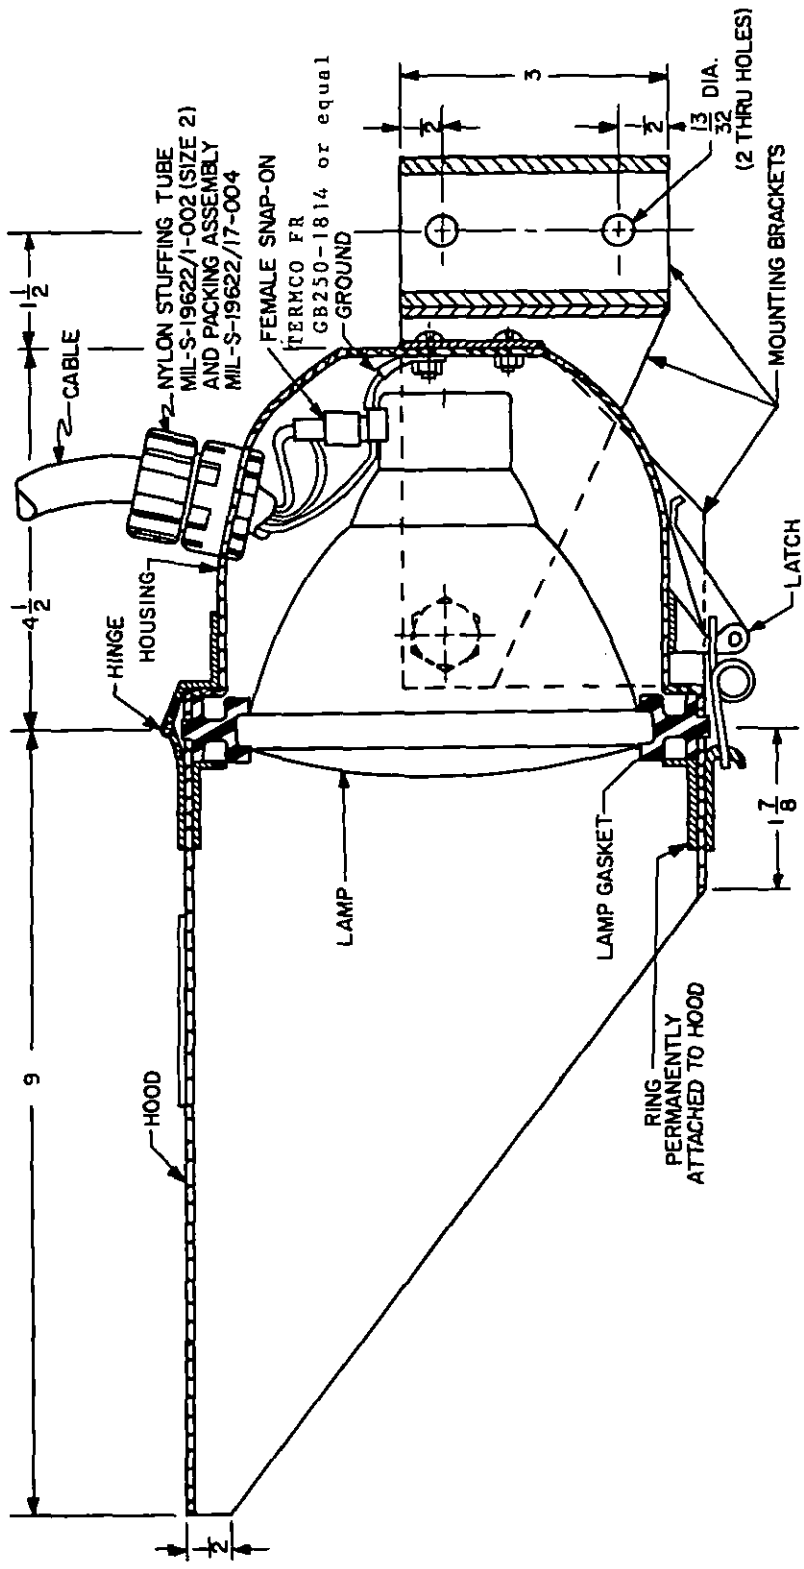


FIGURE 2. Typical section view of symbol 316.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

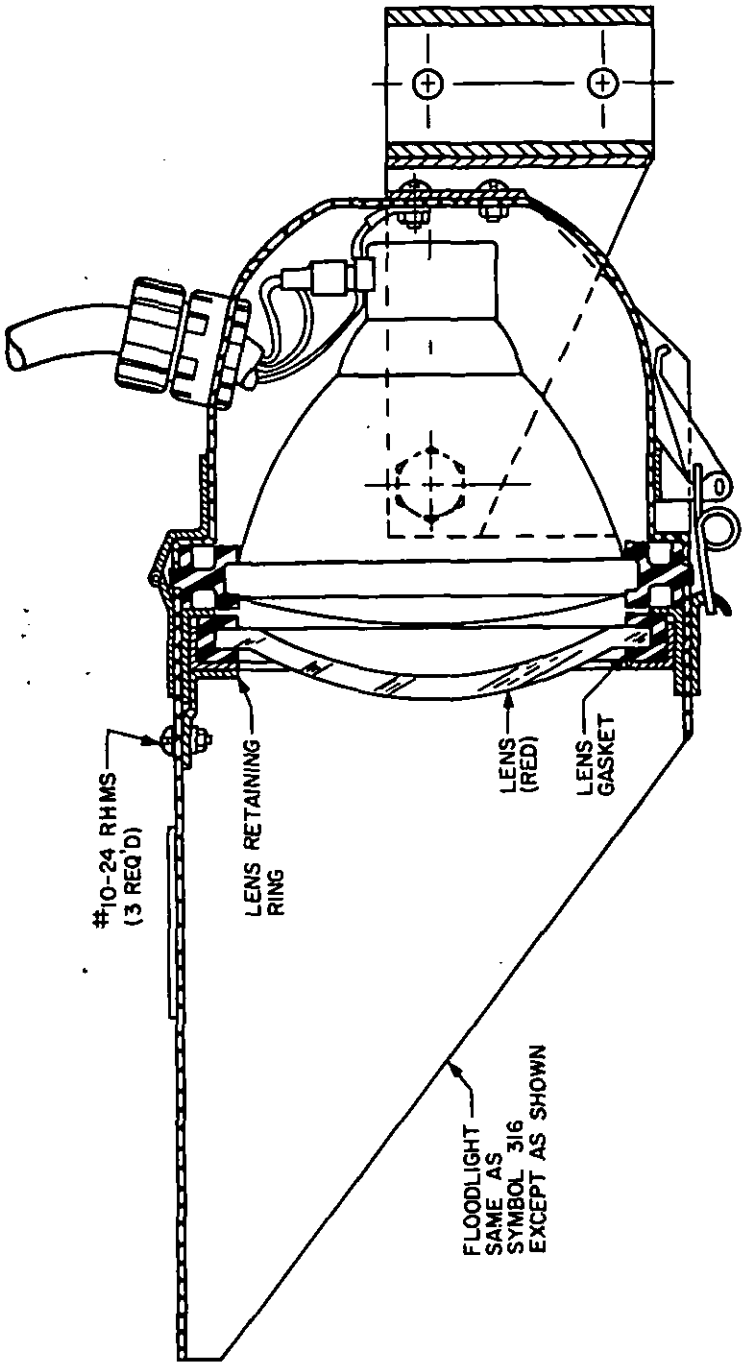


FIGURE 4. Typical section view of symbol 317.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:52Z
Check the source to verify that this is the current version before use.

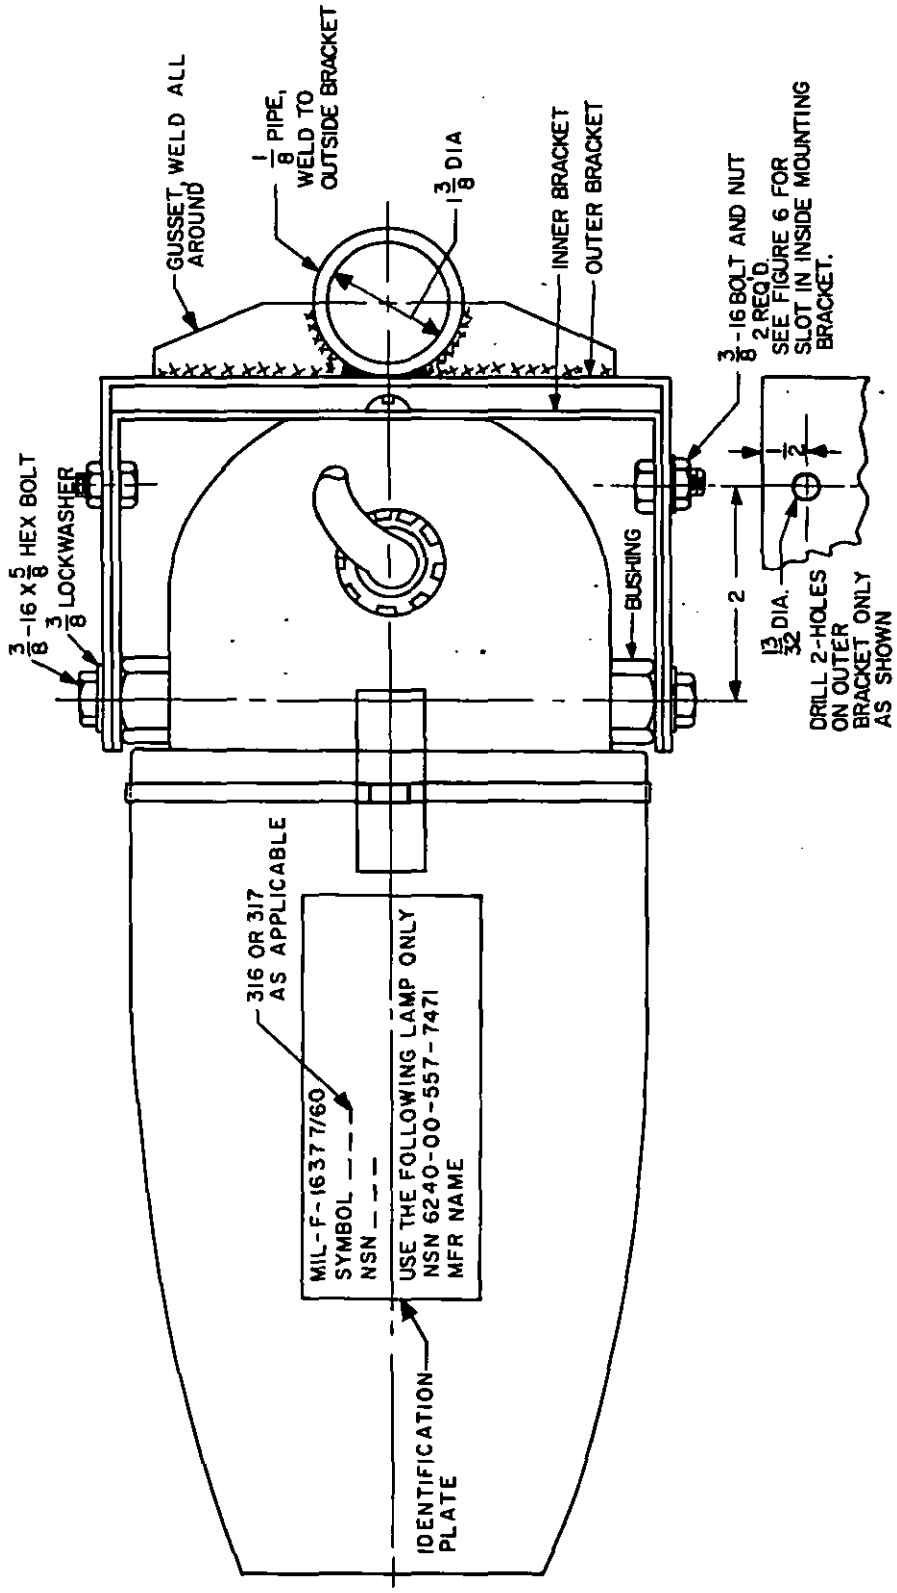


FIGURE 4. Typical top view.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:52Z
Check the source to verify that this is the current version before use.

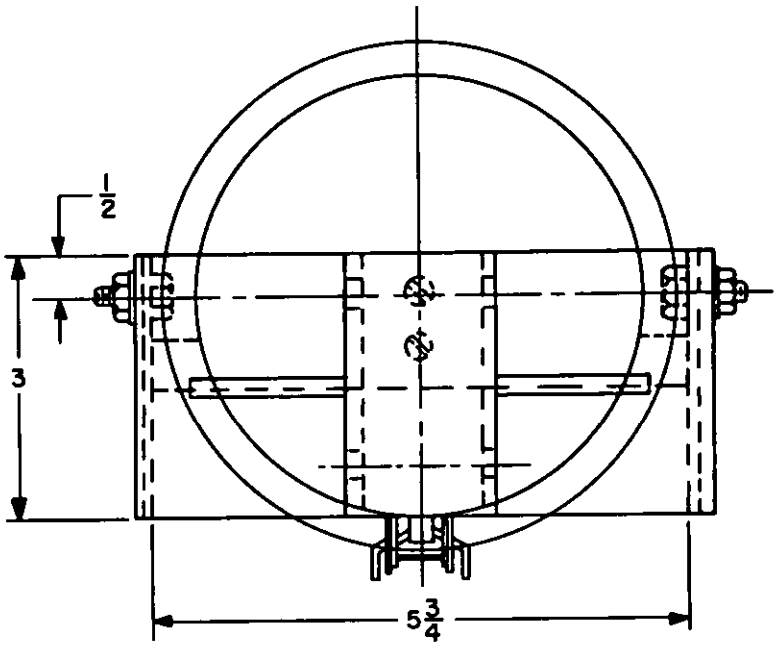


FIGURE 5. Typical rear view.

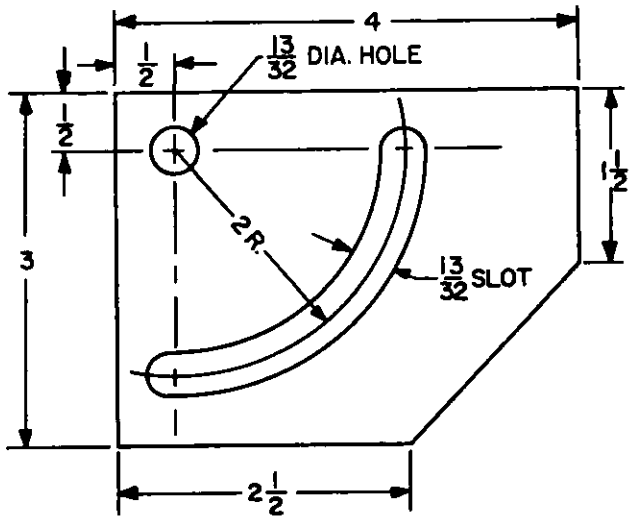


FIGURE 6. Side view of inner mounting bracket showing slot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

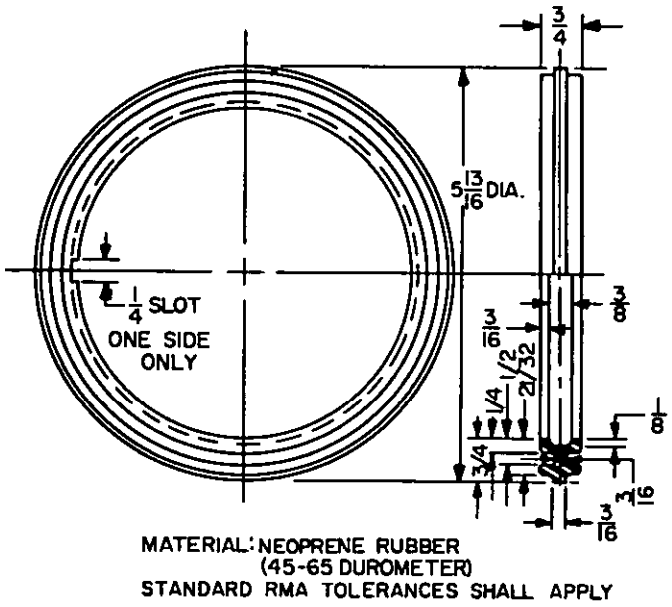


FIGURE 7. Lamp gasket.

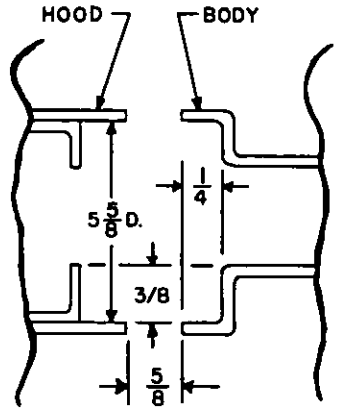


FIGURE 8. Lamp gasket mounting.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:52Z
Check the source to verify that this is the current version before use.


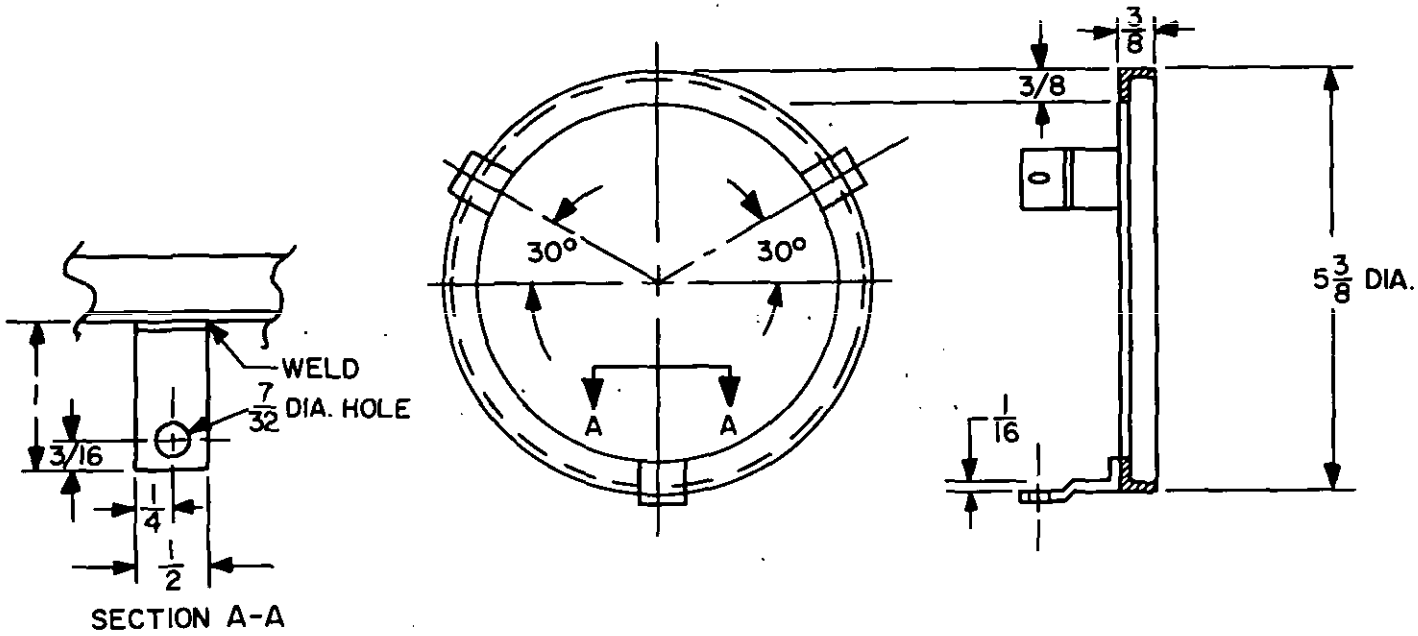



FIGURE 9. Lens retaining ring.

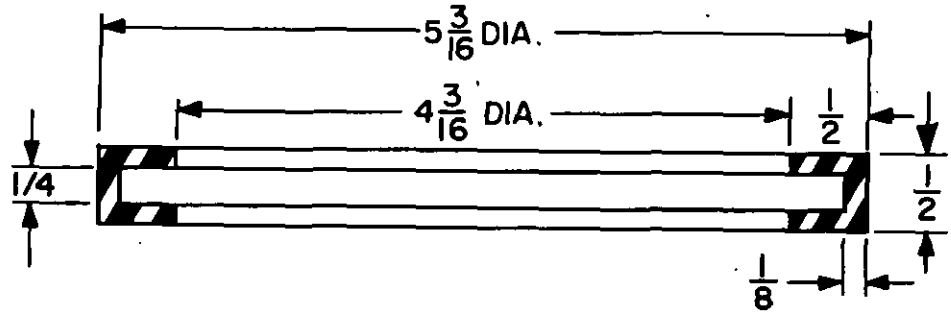

MATERIAL: NEOPRENE RUBBER
(45-65 DUROMETER)
STANDARD RMA TOLERANCES SHALL APPLY

FIGURE 10. Lens gasket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

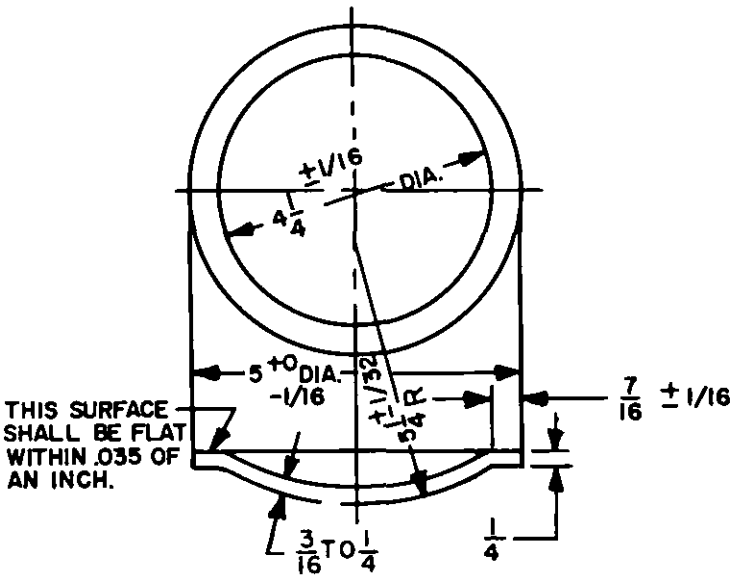

MATERIAL: GLASS
SPECIFICATION: MIL-F-16377
COLOR: RED TRANSPARENT, 20-30% LIGHT TRANSMISSION AT 76°F.

FIGURE 11. Lens.

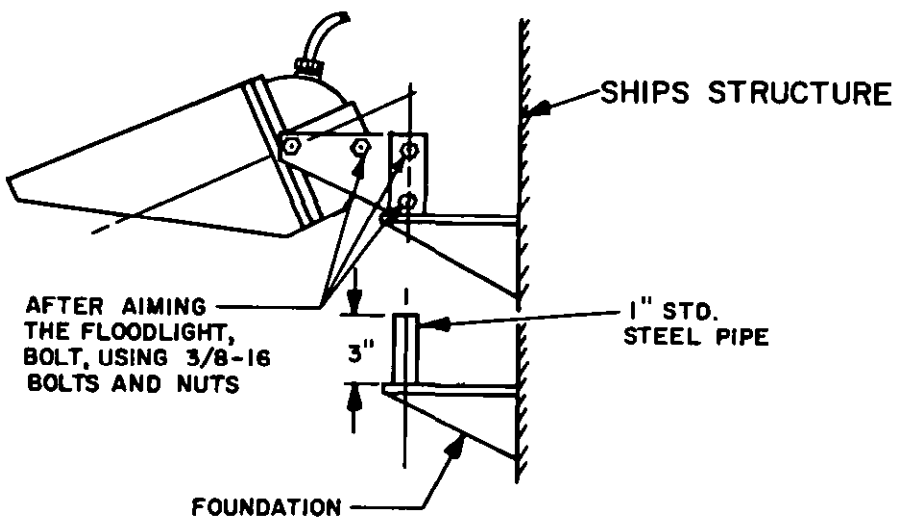


FIGURE 12. Typical mounting detail.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:52Z
Check the source to verify that this is the current version before use.

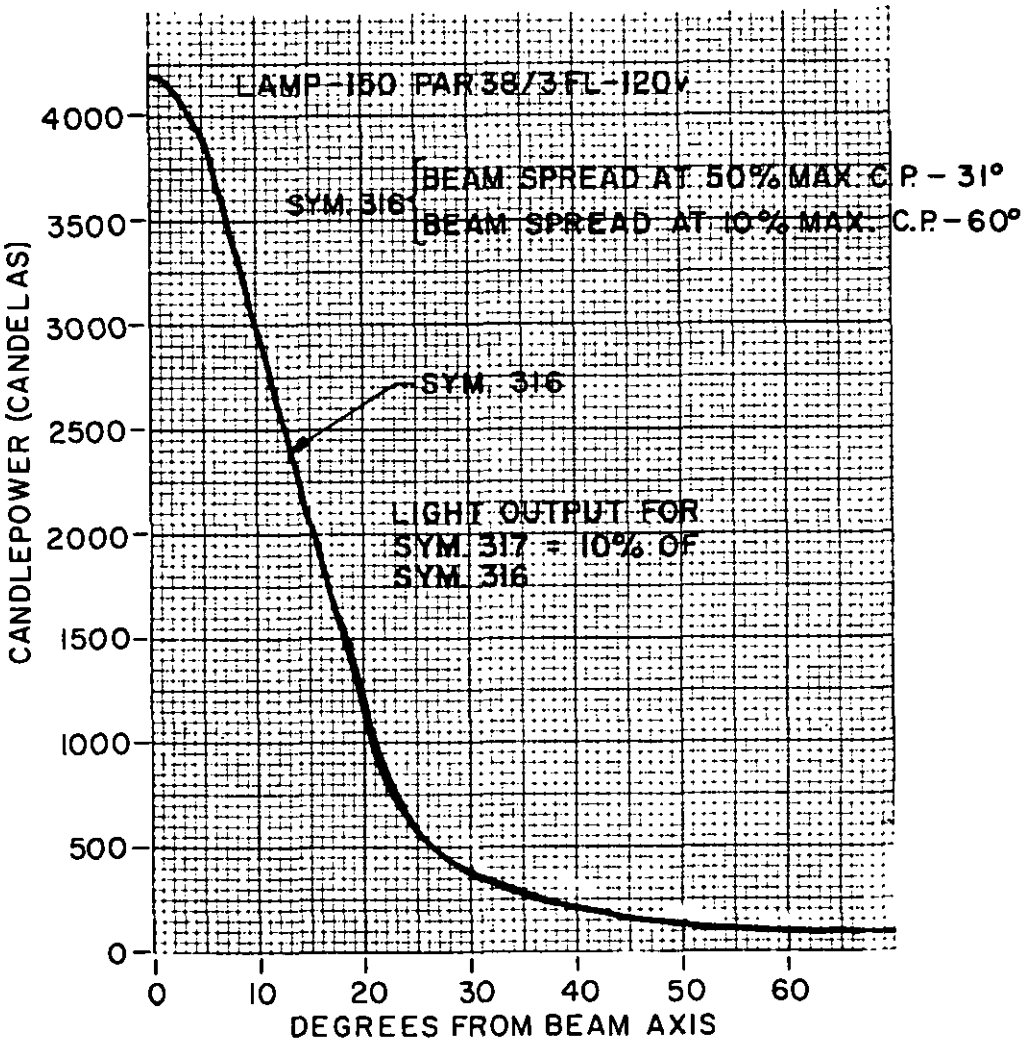


FIGURE 13. Typical candlepower distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: II
Class: 2.
SYMBOL NUMBERS:
Symbol 316: Floodlight, 150 watts, 120 volts, sealed beam lamp, white.
Symbol 317: Floodlight, 150 watts, 120 volts, sealed beam lamp, red.
DESIGN:
Electrical rating: 150 watts, 120 volts.
Dimensions and configuration: See figures 1 through 13
Material: Corrosion resistant steel (CC304) except as otherwise indicated in this specification.
Finish: Gray enamel.
Enclosure: Dripproof 15 degrees.
Lamp: The lamp shall be incandescent, 150 watt, 120 volt, sealed beam, PAR-38, side prong, compact projector flood, industry number 150 PAR 38/3FL-120V, NSN 6240-00-557-7471. Lamp shall not be furnished.
Cable: Floodlights shall be furnished with 10 feet of 3-conductor cable, type, THOF-3 in accordance with MIL-C-915/6. The third conductor shall be used for grounding.
Weight:
Symbol 316: 9.5 lbs.
Symbol 317: 10 lbs.
Designation and marking; An identification plate shall be furnished in accordance with MIL-F-16377 attached as shown on figure 4.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:
Complete floodlights: See table I
Lenses: See table II.
Quality conformance:
Comparison inspection: Same as the first article inspection.
Inspection of product for delivery
Examination: See MIL-F-16377.
Examination for preparation for delivery: See MIL-F-16377.
Quality conformance tests: See MIL-F-16377.

GENERAL INFORMATION: Assignment of military part numbers and general information is shown in table III.

TABLE I. First article and comparison inspection for complete floodlights.

Tests	Requirement of paragraph of MIL-F-16377	Test paragraph of MIL-F-16377	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Dripproof-15 degrees
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14	Dripproof-15 degrees
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Grounding circuit	3.6.13.3	4.8.11	
Salt spray	3.5.15	4.8.10	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

TABLE II. First article and comparison inspection for lenses.

Tests	Requirement paragraph of MIL-F-16377	Test paragraph of MIL-F-16377	Remarks
Examination	3.13	4.5	
Optical uniformity	3.7.4.1.1	4.8.4	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Mechanical shock	3.7.5.6	4.8.17.3	6 ft. lbs.
Thermal shock	3.7.5.7	4.8.17.4	
Breakage pattern	3.7.5.9	4.8.17.6	
Color and luminous transmittance	3.7.3.1	4.8.6.3	red

TABLE III. Part number and general information.

Military Part number M16377/60	Item name	National Stock Number (NSN)	Supersedes
316	Complete floodlight, symbol 316	6230-01-026-4438	
317	Complete floodlight, symbol 317	6230-01-026-4439	
001	Lens	6210-00-060-3220	MS17227-2
002	Lamp gasket	5330-01-028-6281	
003	Lens retaining ring	6230-01-026-4562	
004	Lens gasket	5330-01-028-5739	

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Navy - SH
(Project 6230-N285)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.