INCH-POUND
MIL-DTL-16377/60B(SH)
30 June 2014
SUPERSEDING
MIL-F-16377/60A(SH)
11 April 1983

DETAIL SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, FLOODLIGHTS, 150 WATTS, 120 VOLTS, DRIPPROOF 15 DEGREES, SYMBOLS 316 AND 317

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-16377.

All dimensions are in inches. For tolerances, other than specified herein, see 3.5.2 of MIL-DTL-16377.

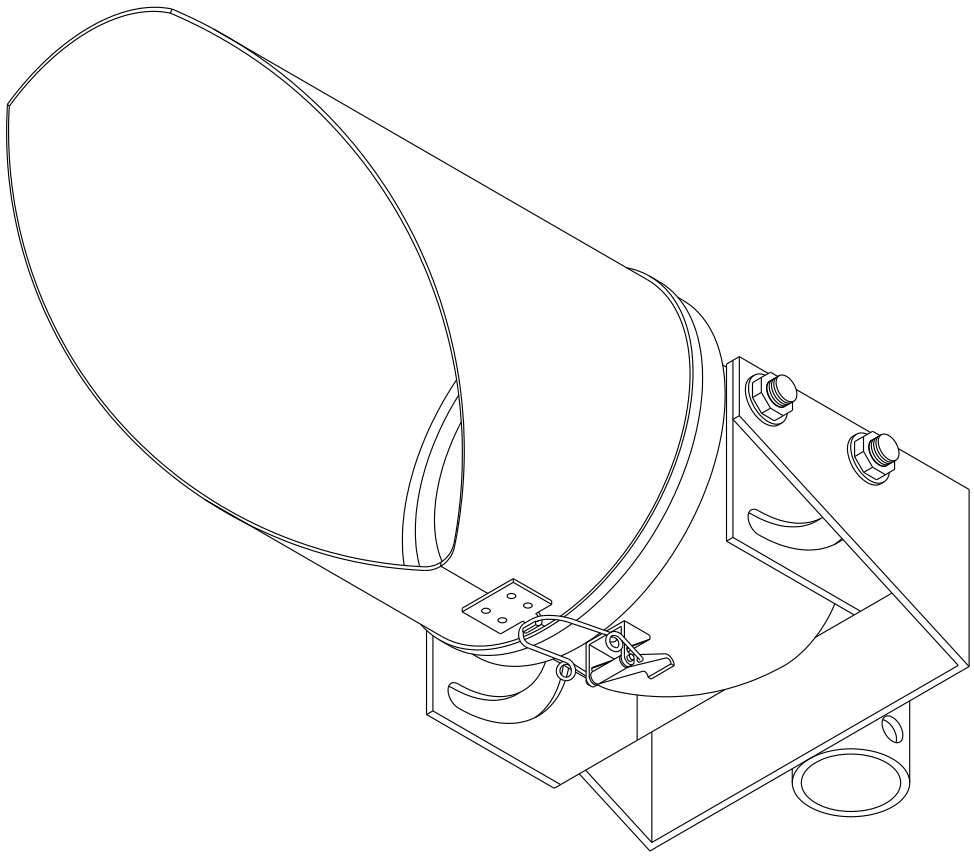


FIGURE 1. Typical view of symbols 316 and 317.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

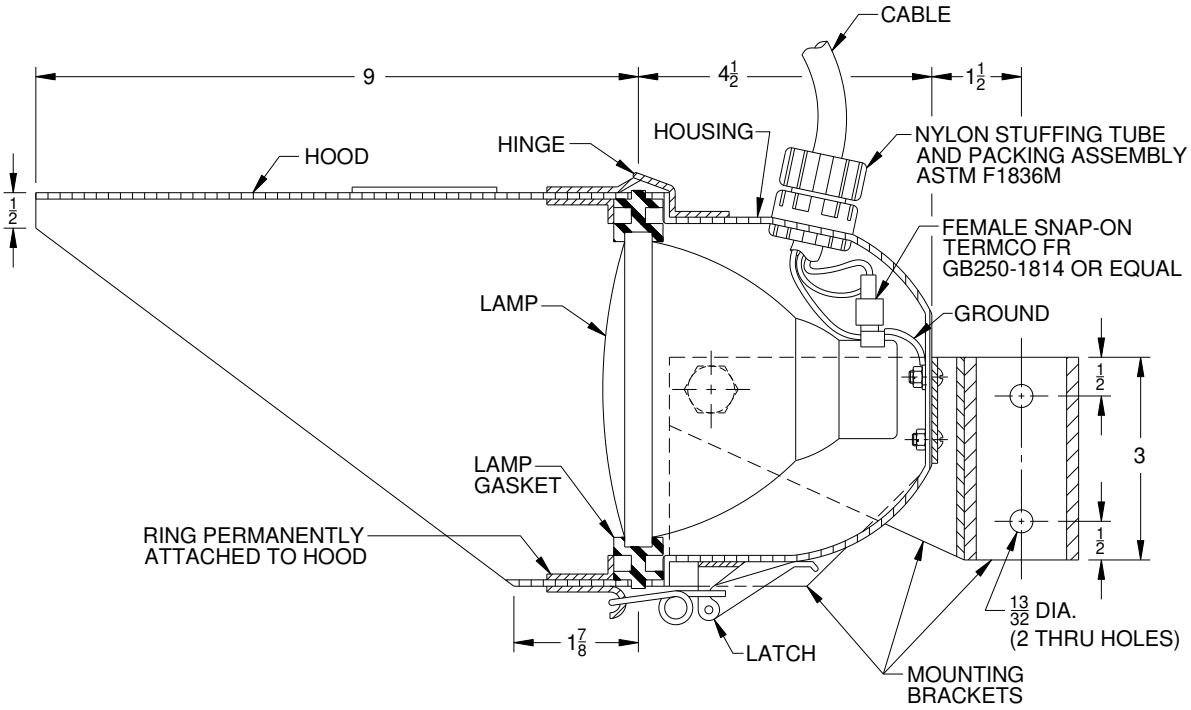


FIGURE 2. Typical section view of symbol 316.

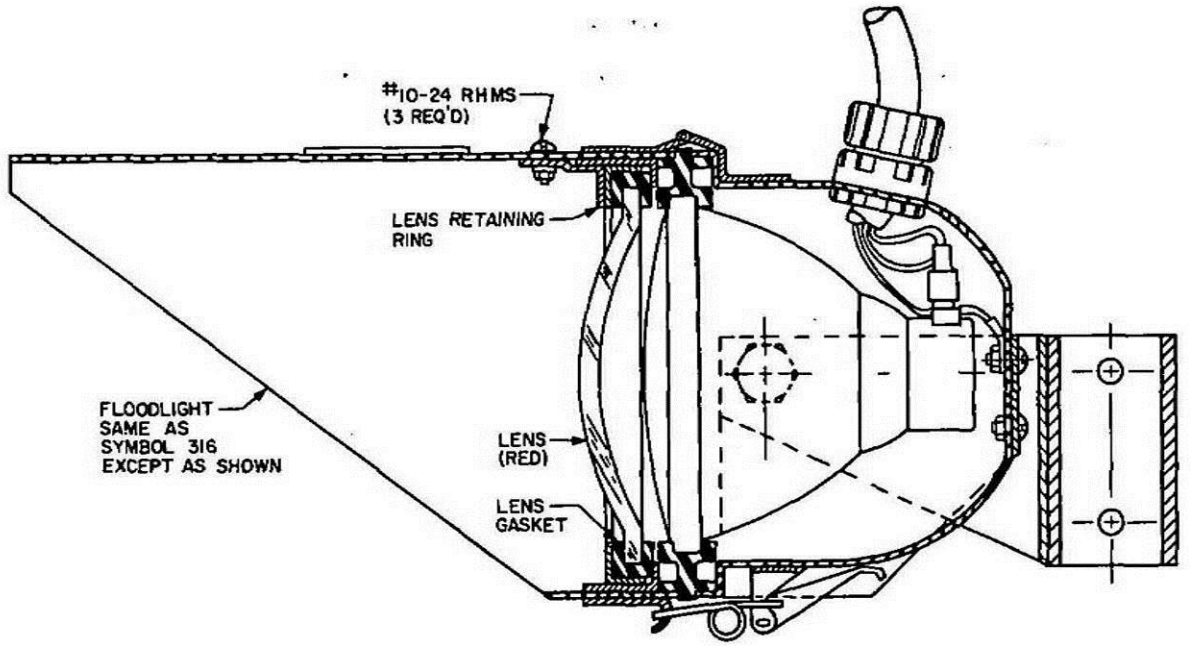


FIGURE 3. Typical section view of symbol 317.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

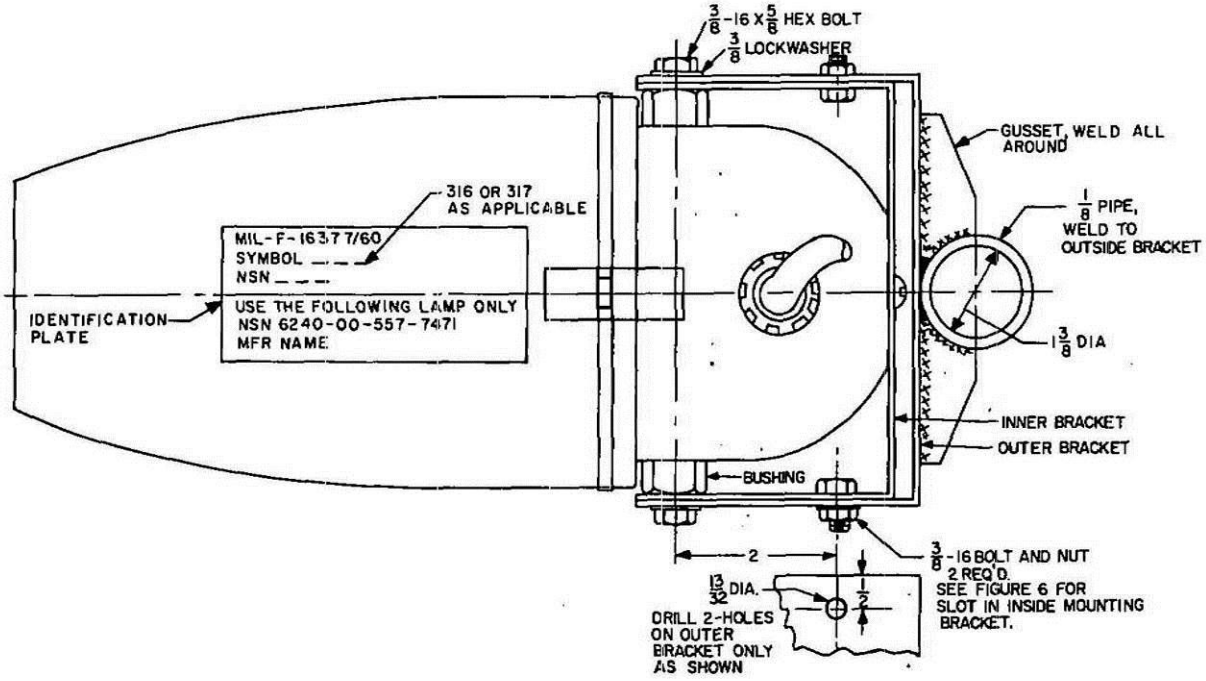


FIGURE 4. Typical top view.

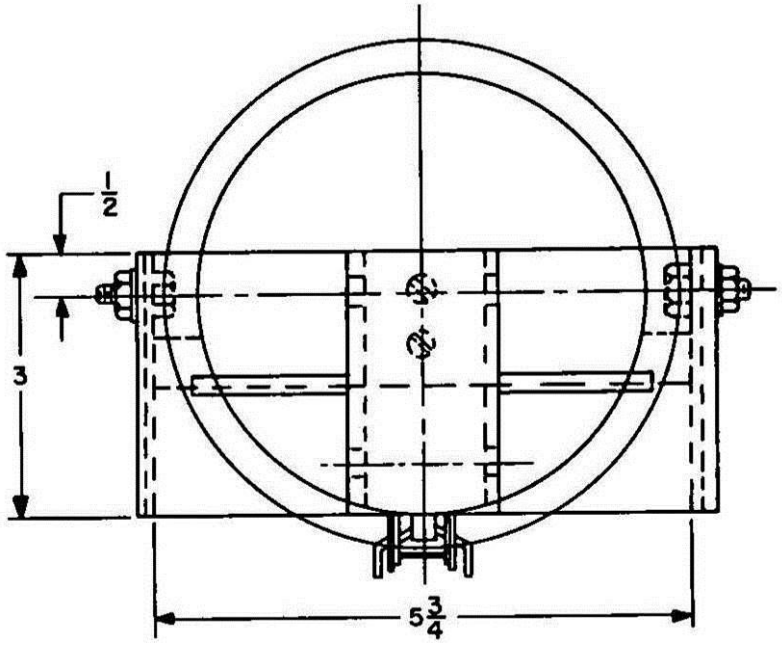


FIGURE 5. Typical rear view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

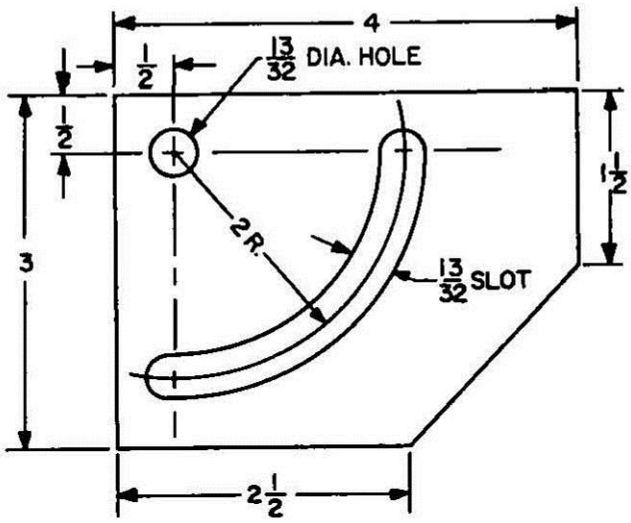


FIGURE 6. Side view of inner mounting bracket showing slot.

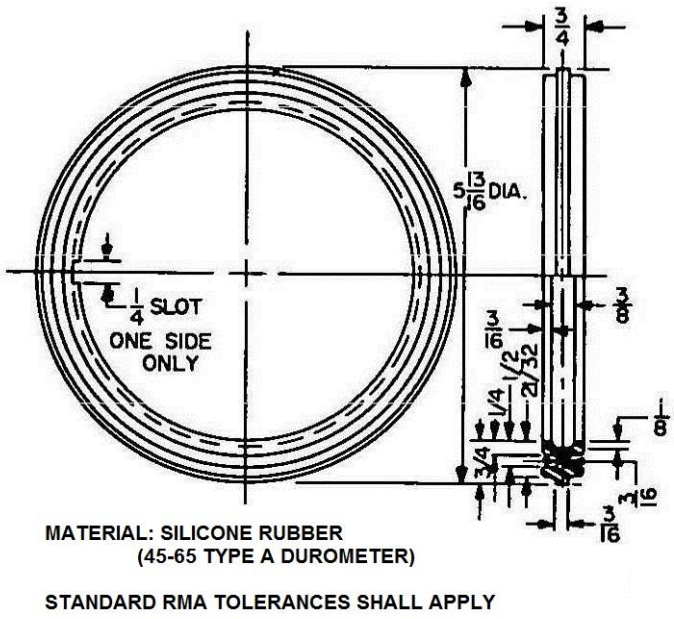


FIGURE 7. Lamp gasket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

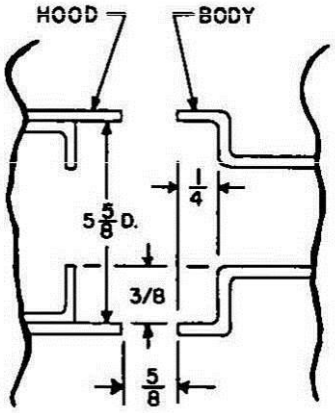


FIGURE 8. Lamp gasket mounting.

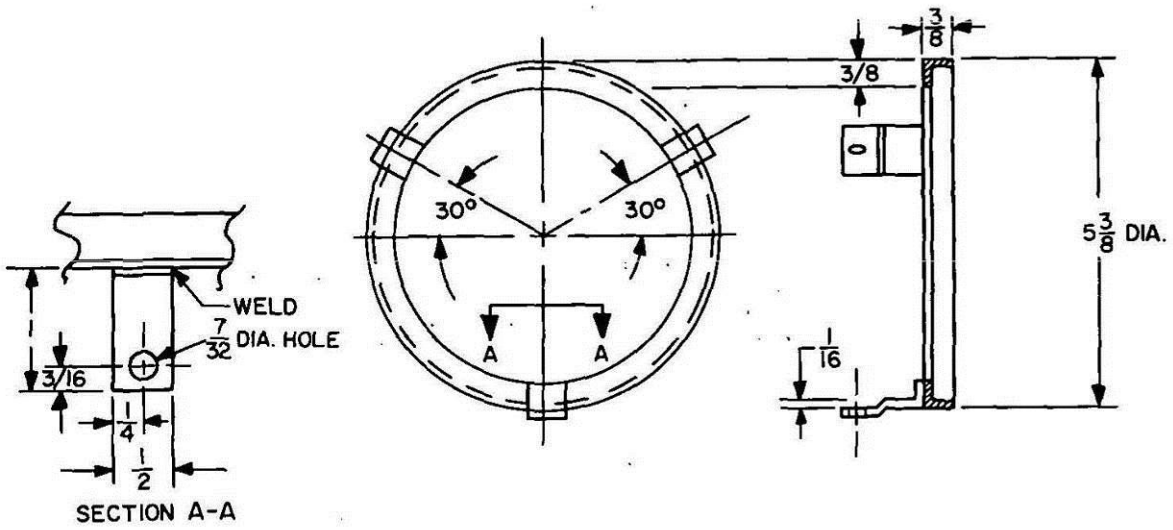


FIGURE 9. Lens retaining ring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.


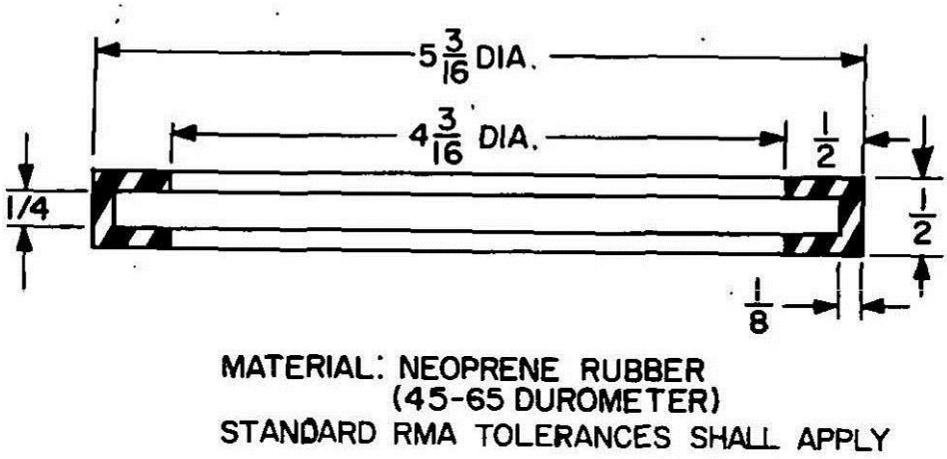


FIGURE 10. Lens gasket.

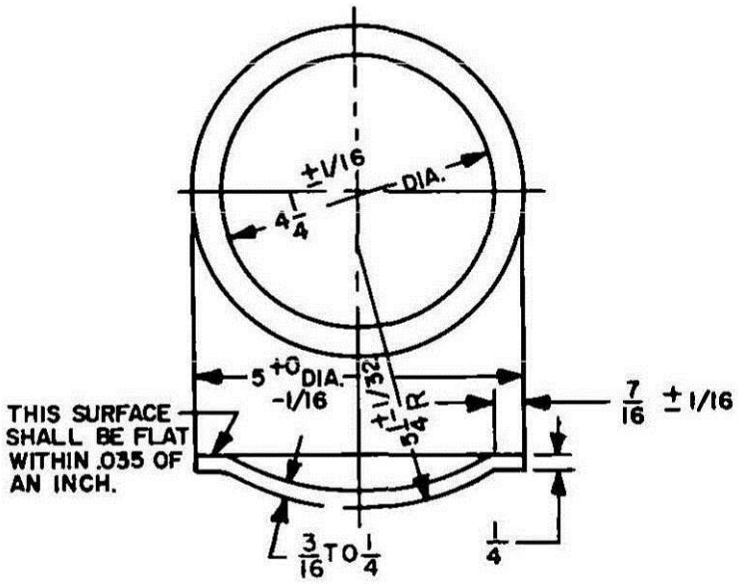

Material:	Glass.
Specification:	MIL-DTL-16377.
Color:	Red transparent, 20 – 30% Light transmission at 76 °F (24.4 °C).

FIGURE 11. Lens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

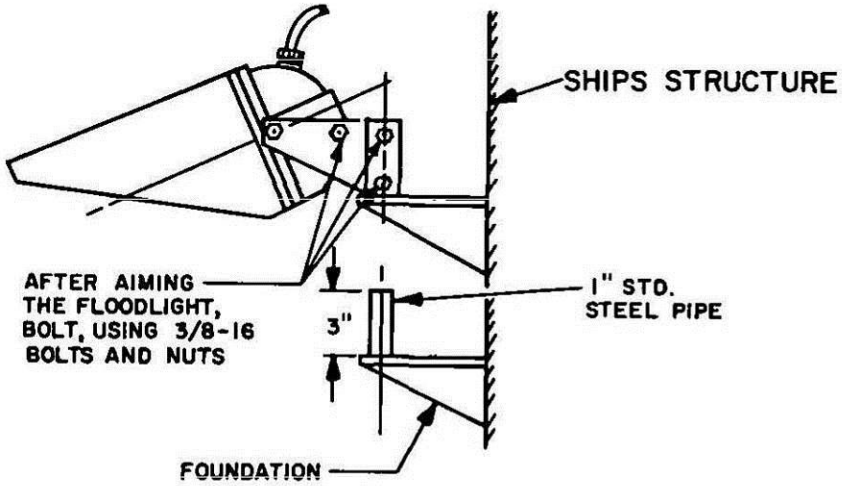


FIGURE 12. Typical mounting detail.

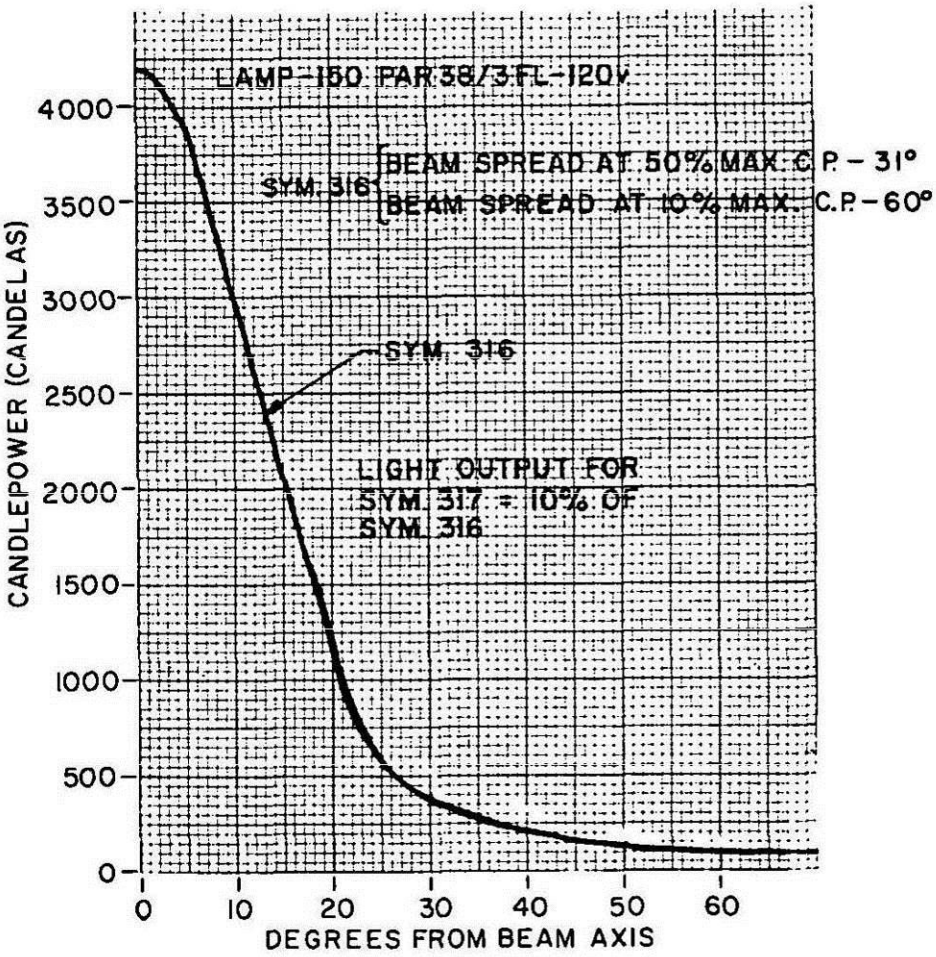


FIGURE 13. Typical candlepower distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:

Type: II
Class: 2

SYMBOL NUMBERS:

316: Floodlight, 150 watts, 120 volts, sealed beam lamp, white.
317: Floodlight, 150 watts, 120 volts, sealed beam lamp, red.

DESIGN:

Electrical rating: 150 watts, 120 volts.
Dimensions and configuration: See figures 1 through 13.
Material: Corrosion resistant steel (316) except as otherwise indicated in this specification.
Finish: Haze gray, Number 26270 of FED-STD-595.
Enclosure: Dripproof 15 degrees.
Lamp: The lamp shall be incandescent, 150 watt, 120 volt, sealed beam, PAR-38, side prong, compact projector flood, industry number 150 PAR-38/3FL-120V, NSN 6240-00-557-7471. Lamp shall not be furnished.
Cable: Floodlights shall be furnished with 10 feet of 3-conductor cable, Type, THOF-3 in accordance with MIL-DTL-915/6. The third conductor shall be used for grounding.
Weight:
Symbol 316: 9.5 pounds.
Symbol 317: 10 pounds.
Designation and marking: An identification plate shall be furnished in accordance with MIL-DTL-16377, attached as shown on figure 4.

EXAMINATION AND TESTS:

Examination and tests shall be as specified in MIL-DTL-16377 and as follows:

First article inspection:
Complete floodlights: See table I.
Lenses: See table II.
Conformance:
Comparison inspection: Same as first article inspection.
Conformance inspection: See MIL-DTL-16377.

GENERAL INFORMATION:

Assignment of military part numbers and general information is shown in table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

TABLE I. First article and comparison inspection for complete floodlights. [1/]

Test	Requirement	Test Method	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Dripproof 15 degrees
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14	Dripproof 15 degrees
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Grounding circuit	3.6.13.3	4.8.11	
Salt spray	3.5.15	4.8.10	

NOTE:
[1/] Requirement and test method paragraph numbers refer to MIL-DTL-16377.

TABLE II. First article and comparison inspection for lenses. [1/]

Test	Requirement	Test Method	Remarks
Examination	3.13	4.5	
Optical uniformity	3.7.6.1.1	4.8.4	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Mechanical shock	3.7.7.6	4.8.17.3	6 ft-lbs.
Thermal shock	3.7.7.7	4.8.17.4	
Breakage pattern	3.7.7.9	4.8.17.6	
Color and luminous transmittance	3.7.3.1	4.8.6.3	Red

NOTE:
[1/] Requirement and test method paragraph numbers refer to MIL-DTL-16377.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

TABLE III. Part number and general information.

Military Part Number M16377/60-	Item Name	National Stock Number (NSN)	Supersedes
316	Complete floodlight, Symbol 316	6230-01-026-4438	
317	Complete floodlight, Symbol 317	6230-01-026-4439	
001	Lens	6210-00-060-3220	MS17227-2
002	Lamp gasket		
003	Lens retaining ring	6230-01-026-4562	
004	Lens gasket	5330-01-028-5739	
005	Lens (amber)	6210-01-166-7186	M16377/60-001 (MOD)

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy – SH

Review activity:
DLA – IS

Preparing activity:
Navy – SH
(Project 6230-2012-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.