-MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING, FLUORESCENT, DETAIL LIGHTING FOR MIRRORS FOR SMALL BOATS

8 WATTS, 120 VOLTS, 60 HERTZ, TOTALLY ENCLOSED, SYMBOL 354

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquisition of the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

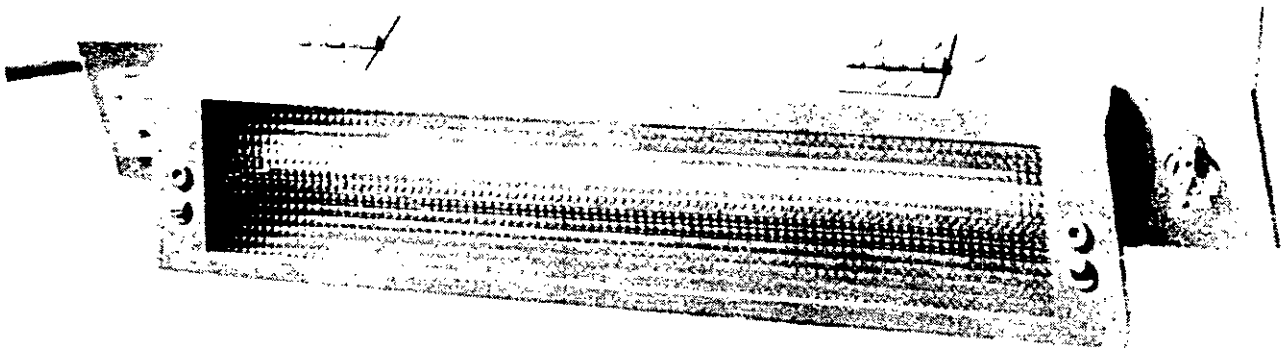


FIGURE 1. Typical view of Symbol 354.

All dimensions in inches.
For tolerances other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:54Z
Check the source to verify that this is the current version before use.


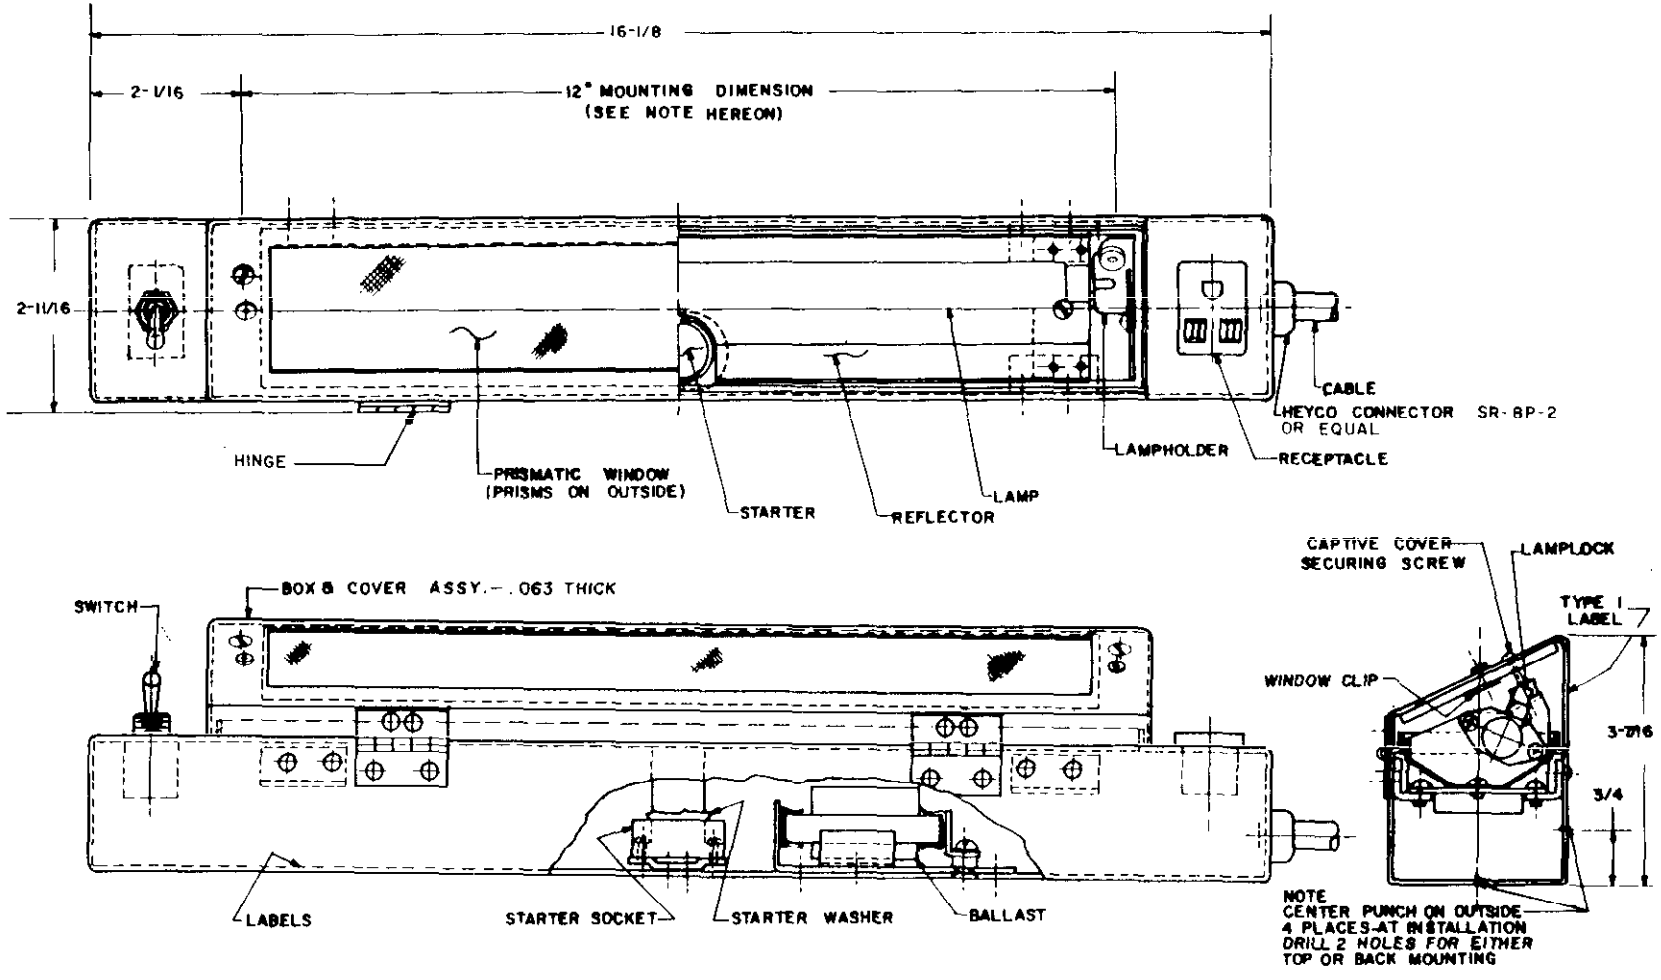


FIGURE 2 TYPICAL SECTION VIEWS OF SYMBOL 354

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:54Z
Check the source to verify that this is the current version before use.

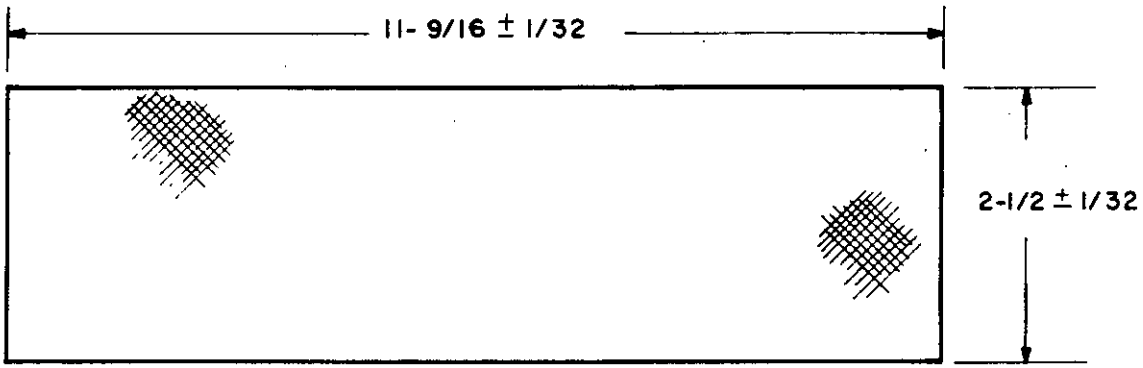

Material for window shall be 1/8 inch thick, clear, prismatic (one side only), heat resistant, cast acrylic plastic sheet, type CLEAR-2 of MIL-P-24191.

FIGURE 3. PRISMATIC WINDOW.

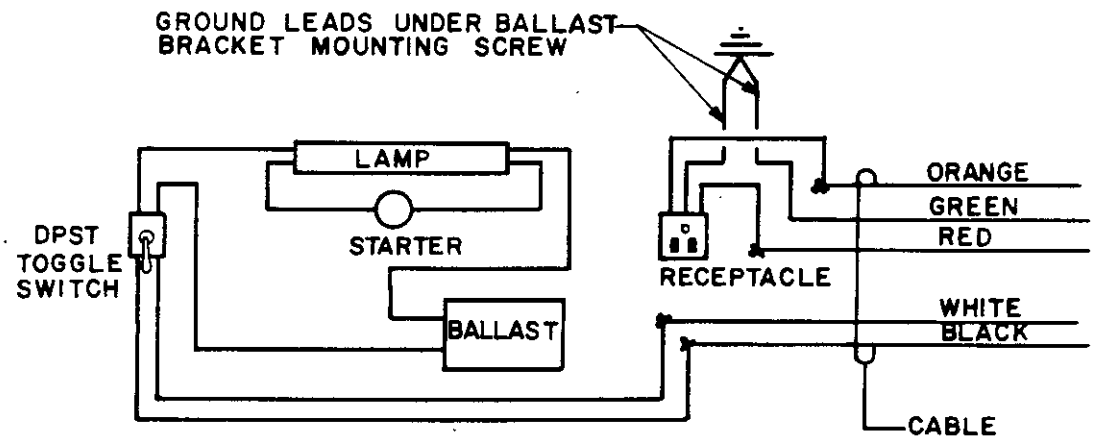


FIGURE 4. WIRING DIAGRAM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: I
Class: 1

SYMBOL NUMBER:
Symbol 354: Complete fixture 16-1/8 inches in length with one 8-watt cool white fluorescent lamp, clear prismatic window, and with toggle switch and single receptacle.

DESIGN:
Electrical rating: 8-watts, 120 volts, 60 Hertz.
Dimensions and configuration: See figures 1 through 3.
Prismatic Window: See figure 3.
Wiring diagram: See figure 4.
Cable: 10 feet of type ST, AWG 18,5 conductor (black, white, red, green and orange) in accordance with J-C-580.
Receptacle: Receptacle shall be Leviton part number 1374-051 (ivory) or equivalent except that the ground contact shall be nickel-plated 0.0003 inch thick.
Weight: 3 lbs. 8 oz.
Enclosure: Totally enclosed
Switch: Switch shall be toggle, DPST, in accordance with MS16569-1.
Finish: Complete fixtures to be finished as same as for type I, class I fixtures of MIL-F-16377.
Designation and marking: The following labels shall be furnished in accordance with MIL-F-16377 applied as shown in figures 1 and 3:

(a) Two type I.
(b) One type IV. The information to be shown on the type IV label shall be "USE THE FOLLOWING REPAIR PARTS ONLY." List all standard parts shown in table I and window assemblies of table IV by name and stock number only.

Standard Parts: The standard parts shown in table I shall be used in the construction of the fixtures specified herein.

QUALITY ASSURANCE:
First article inspection:
Complete fixtures: See table II.
Window assemblies: See table III.
Quality conformance: Same as the first article inspection.
Inspection of product for delivery:
Examination: See MIL-F-16377.
Examination for preparation of delivery: MIL-F-16377.
Quality conformance tests: See MIL-F-16377.

GENERAL INFORMATION:
Assignment of Military part numbers and general information is shown in Table IV.

TABLE I. Standard Parts.

Name	Specification or Military Part Number	National Stock Number (NSN)	Remarks
Lamp	W-L-116/3	6240-00-299-5546	Industry number F8T5/CW
Lamplock	M16377/40-001	6250-00-399-7039	
Lampholder	MIL-L-970/10	6250-00-377-8590	
Startersocket	MIL-L-970/13	6250-00-295-2738	
Starter	8w, Type III of W-S-755	6250-00-299-5962	Commercial Designation:FS5
Ballast	M16377/45-001	6250-00-295-2735	
Switch, Toggle, DPST	MS16569-1	5930-00-719-9659	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:54Z
Check the source to verify that this is the current version before use.

TABLE II. First Article and Comparison Inspection.

Tests	Requirement Paragraph	Test Paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Shock	3.5.12	4.8.7	Grade B
Vibration	3.5.13	4.8.8	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Noise	3.5.14	4.8.9	
Grounding circuit	3.6.13.3	4.8.11	
Magnetic permeability	3.4.8	4.8.18	

TABLE III. First Article and Comparison Inspection for Prismatic Windows.

Tests	Requirement Paragraph of MIL-F-16377	Test Paragraph of MIL-F-16377	Remarks
Examination	3.13	4.5	-
Optical uniformity	3.7.4.1.1	4.8.4	-

TABLE IV. Part Number and General Information.

Military Part Number M16377/71-	Item Name	National Stock Number (NSN)	Remarks
354	Complete fixture, symbol 354		Figure 2, 1/
001	Prismatic window	6210-00-643-1217	Figure 3, 2/

1/ Formerly covered by NAVSHIPS Drawing No. 9000-S6401-73911.

2/ Formerly covered by NAVSHIPS Drawing No. 9000-S6405-74222(PC 140) and MS16891 (Part MS16891-1).

Preparing activity:
Navy - SH
(Project 6210-N572)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:54Z
Check the source to verify that this is the current version before use.