This document has been approved for public release and sale; its distribution is unlimited.


MIL-F-16377/55(SHIPS)
31 August 1971
SUPERSEDING
MS17233(SHIPS)
17 May 1963
(See page 7)

MILITARY SPECIFICATION SHEET

FIXTURE, BRACKET ASSEMBLY, ADJUSTABLE FOR SUPPORTING HAND LANTERNS,

SYMBOL 2432.1

The complete requirements for procuring the bracket described herein shall consist of this document and the latest issue of MIL-F-16377(SHIPS).

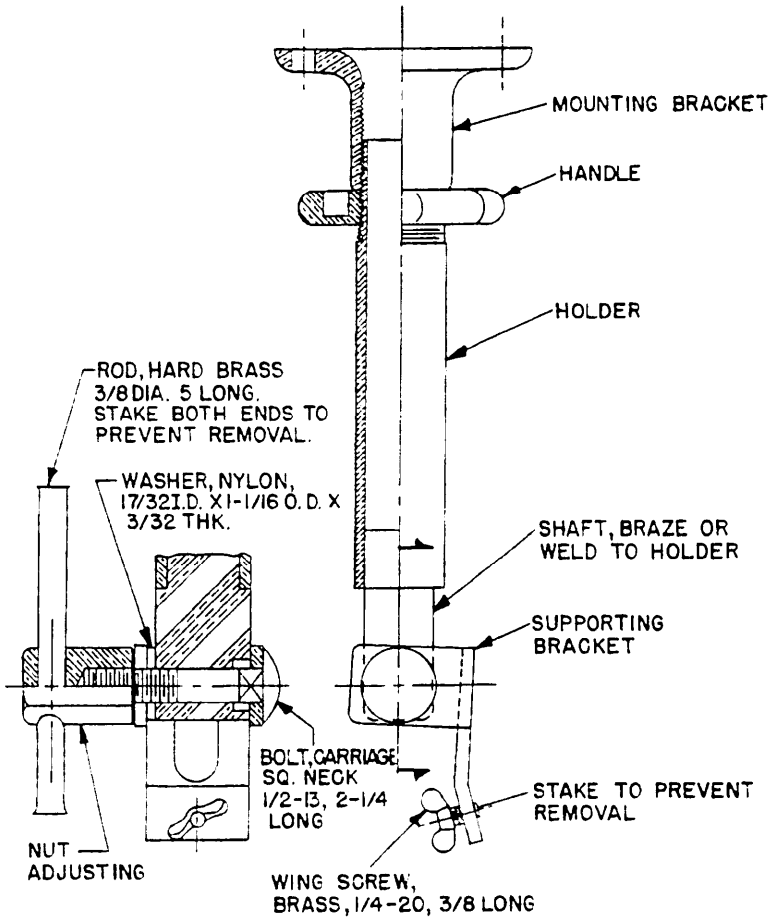


SH 10263

Figure 1 - Bracket assembly, adjustable, symbol 2432.1.

All dimensions in inches.
For tolerances other than specified herein, see paragraph 3.5.2 of MIL-F-16377(SHIPS).


FSC 6230

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

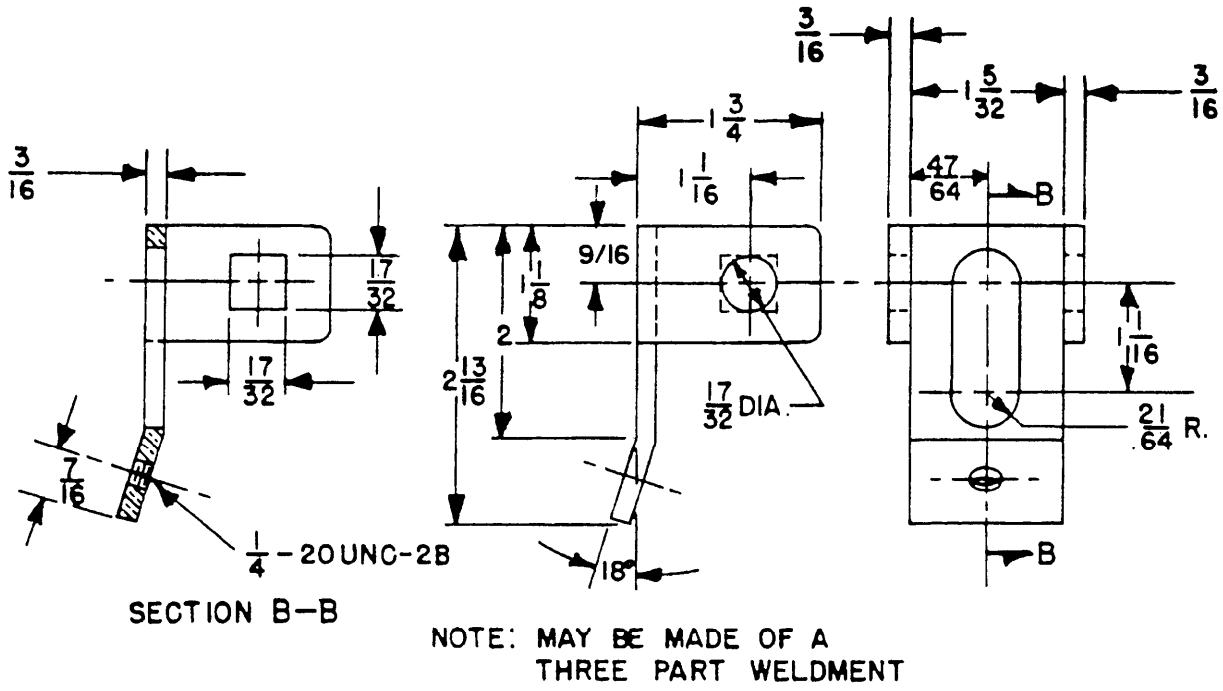

SH 10264


Figure 2 - Supporting bracket.

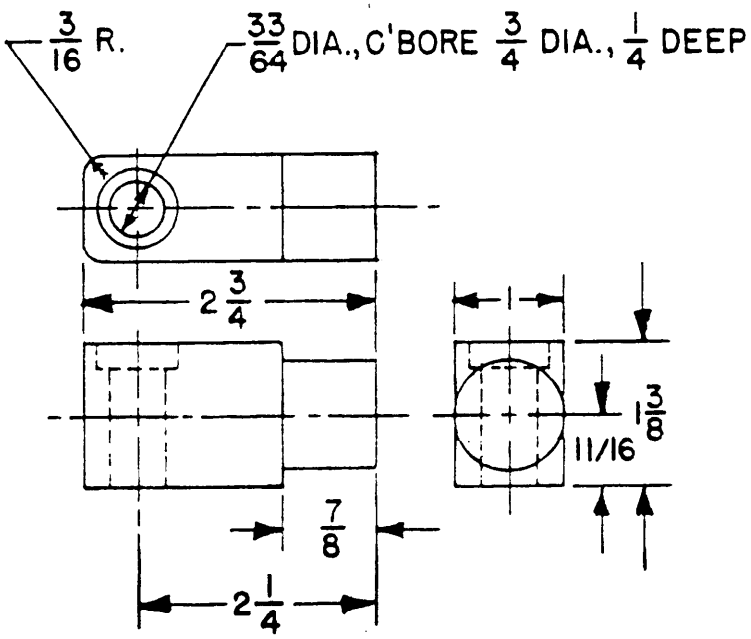

SH 10265

Figure 3 - Shaft.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

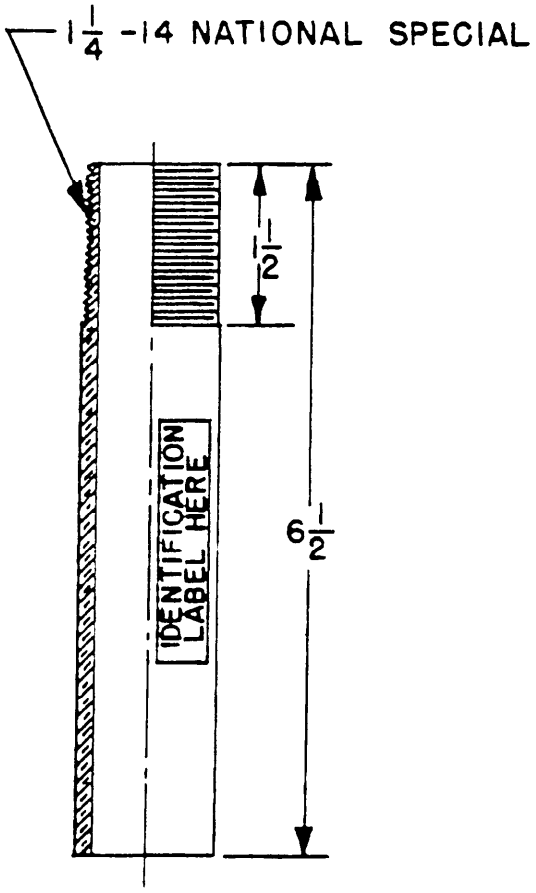

SH 10266


Figure 4 - Holder.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

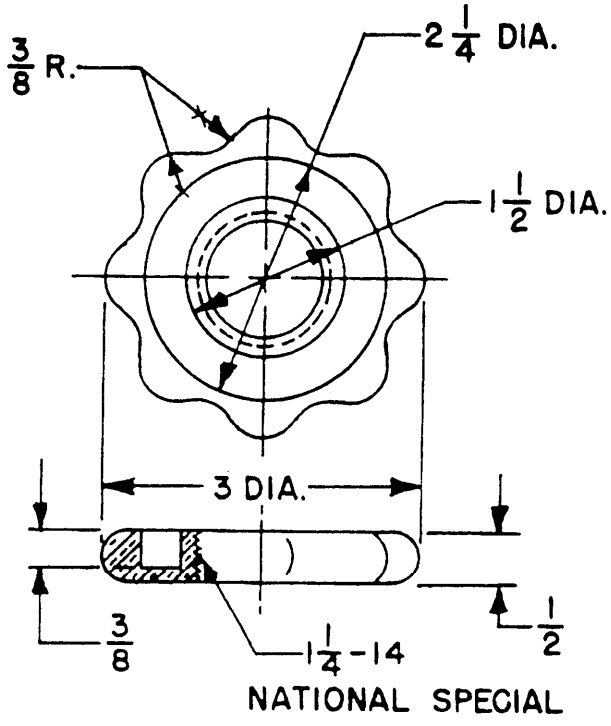

SH 10267


Figure 5 - Handle.

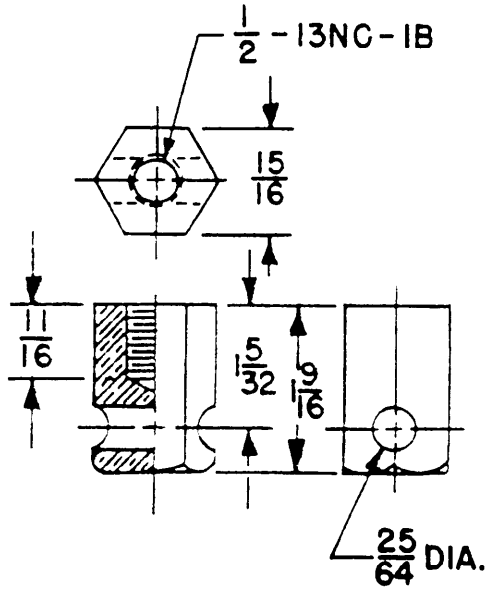

SH 10268

Figure 6 - Nut adjusting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

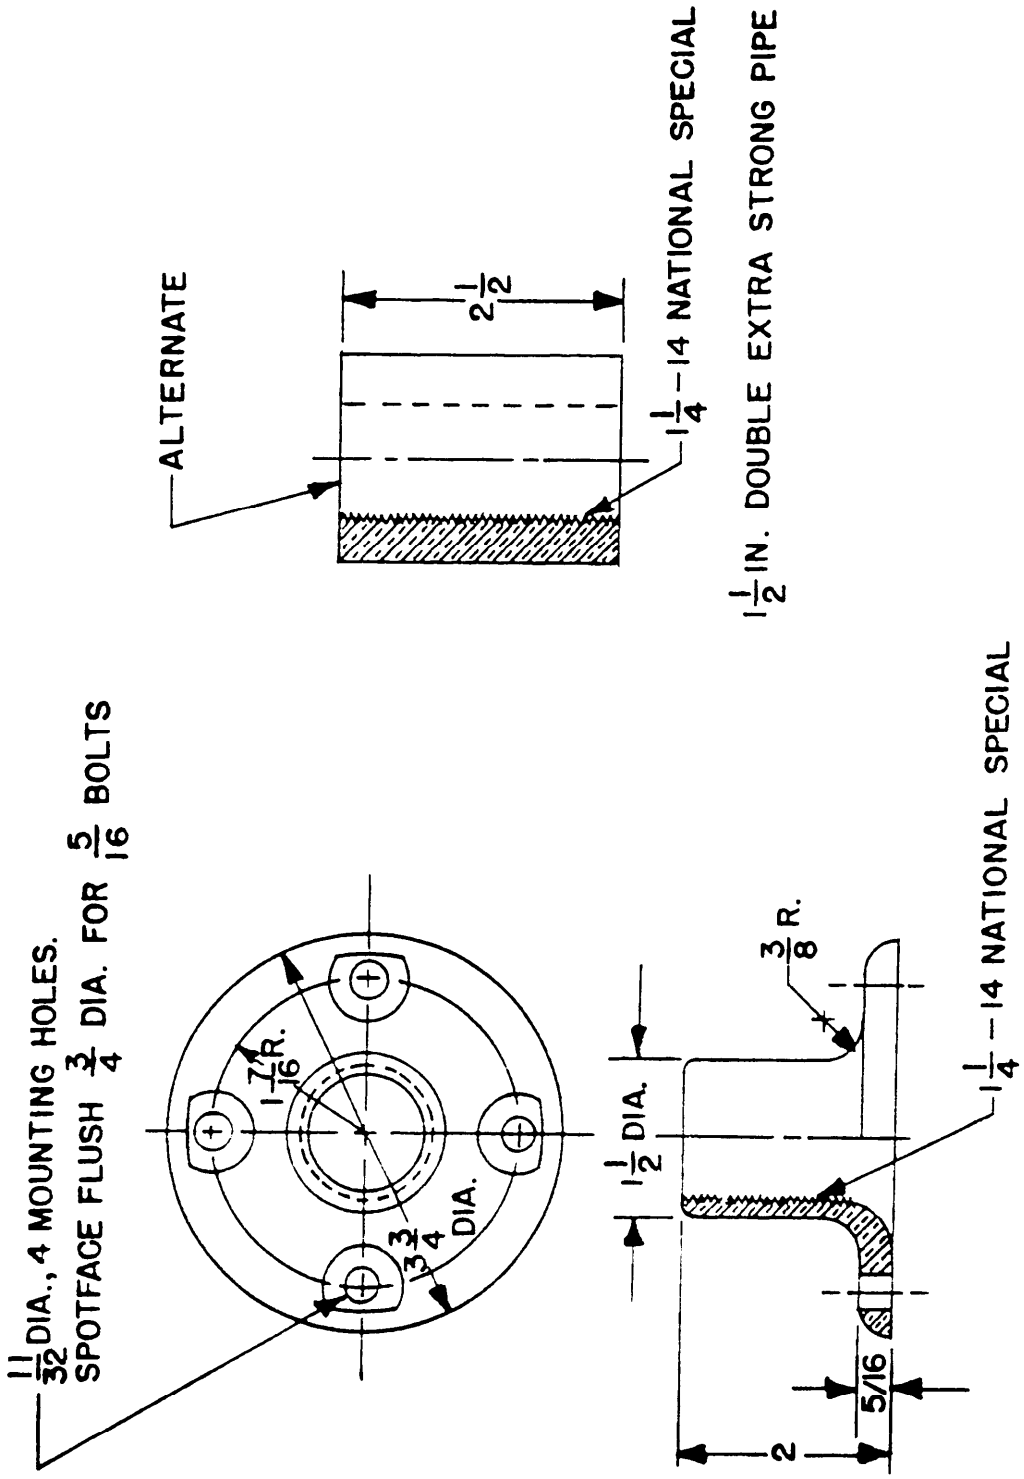

SH 10269

Figure 7 - Mounting bracket (and alternate).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

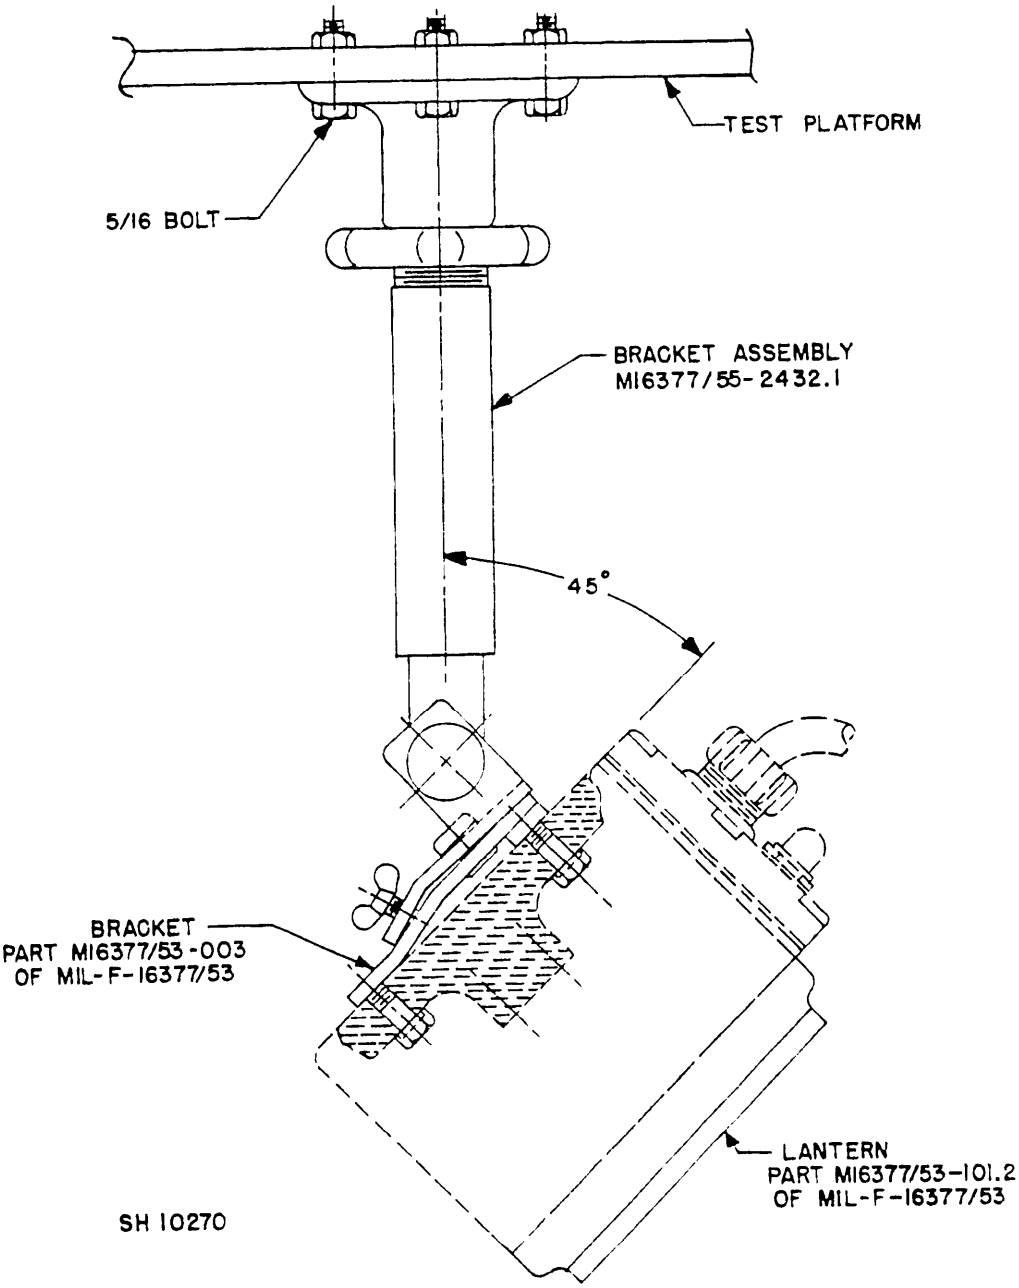


Figure 8 - Mounting arrangement for shock and vibration test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design:

Dimensions and configurations:	See figures 1 through 7.
Material:	Unless otherwise noted in this specification, all material shall be brass.
Mounting bracket:	Mounting bracket shall be furnished as shown on figure 7. The alternate bracket shall not be furnished unless specifically specified in the contract or order.
Finish:	Each sub-assembly shall be painted with a light grey backing enamel of a good commercial grade.
Weight:	5 pounds maximum
Label:	One type I label shall be furnished in accordance with MIL-F-16377 attached as shown on figure 7.

Quality assurance: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	See table I.
Quality conformance:	
Comparison inspection:	Same as the first article inspection.
Inspection of product for delivery:	
Examination:	See MIL-F-16377.
Examination for preparation of delivery	See MIL-F-16377
Quality conformance tests:	See MIL-F-16377 (operation only)

Table I - First article and comparison inspection.

Inspection	Requirement paragraph	Inspection paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Shock	3.5.12	4.8.7	1/
Vibration	3.5.13	4.8.8	1/
Magnetic permeability	3.4.8	4.8.18	

1/ Brackets shall be mounted as shown on figure 8.

General information: Assignment of Military part number and general information is as follows:

(a) Military part number: M16377/55-001
(b) Federal stock number: FSN 6230-843-5991
(c) The bracket shown herein is used to support lanterns, MIL-F-16377/53 and MS17231, over surgical tables onboard ship.
(d) Superseding data: The bracket shown herein was formerly covered by MS17233 and Drawing 9000-S6401-74404.

Preparing activity:
Navy - SH
(Project 6230-N174)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:51Z
Check the source to verify that this is the current version before use.