MIL-F-16377/62(SH)
1 May 1982
SUPERSEDING
Drawing 9-S-5452-I
(Rev. F) 10 March 1969
MS17227(SHIPS) (In part)
20 February 1961
(See page 11)

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING, INCANDESCENT FLOODLIGHTS

500 WATTS, 120 VOLTS, WATERTIGHT, SYMBOLS 300 AND 300.1

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

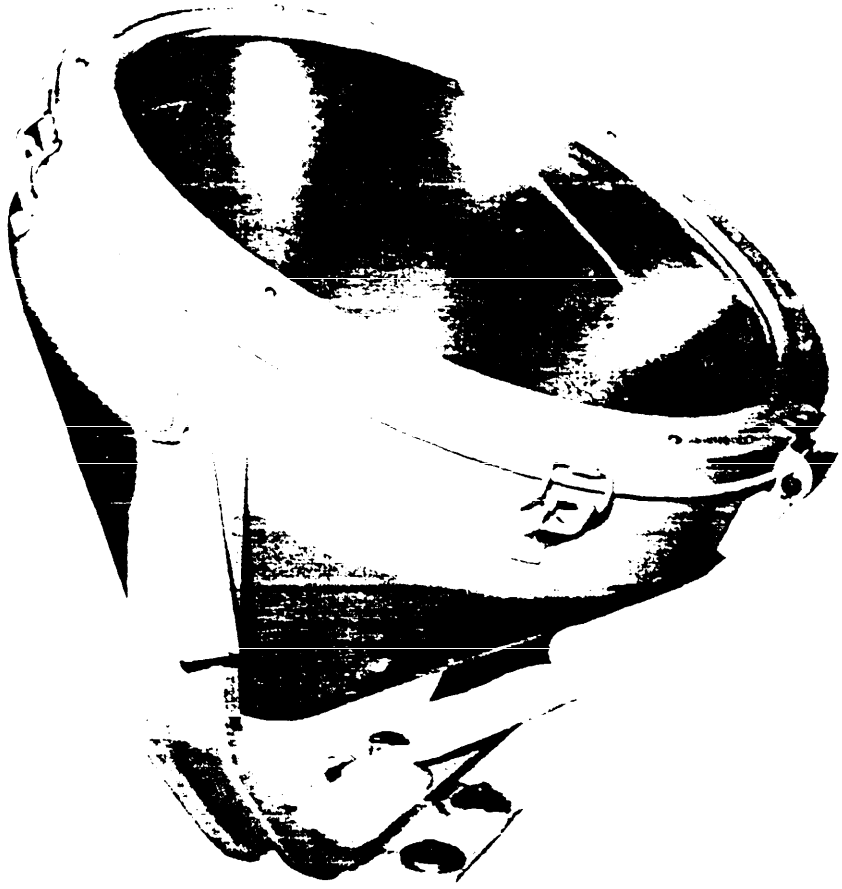


FIGURE 1. Typical view of symbols 300 and 300.1.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6230

Source: https://assist.dla.mil -- Downloaded: 20260-18T08:52Z
Check the source to verify that this is the current version before use.

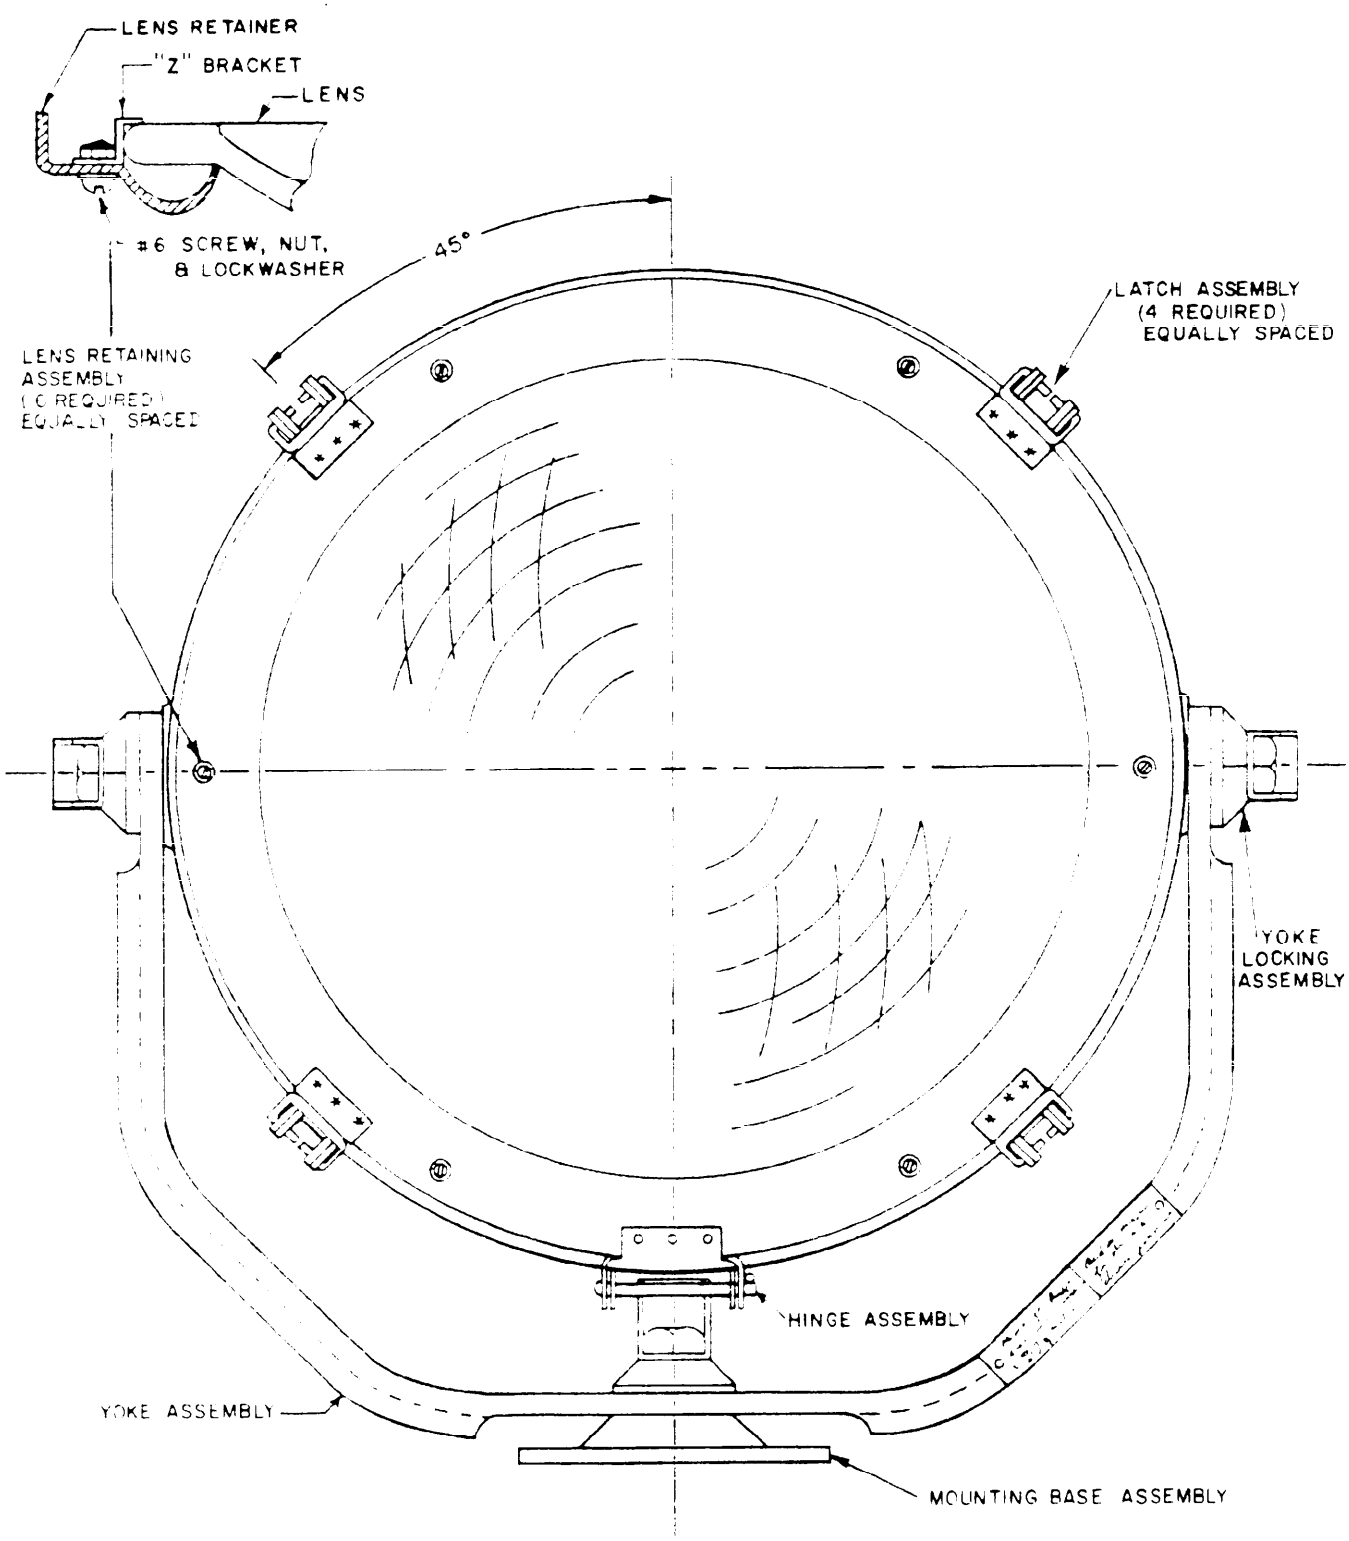


FIGURE 2. Floodlight,typical-front view.

Source: https://assist.dla.mil -- Downloaded: 2026l0-18T08:52Z
Check the source to verify that this is the currentversion before use.



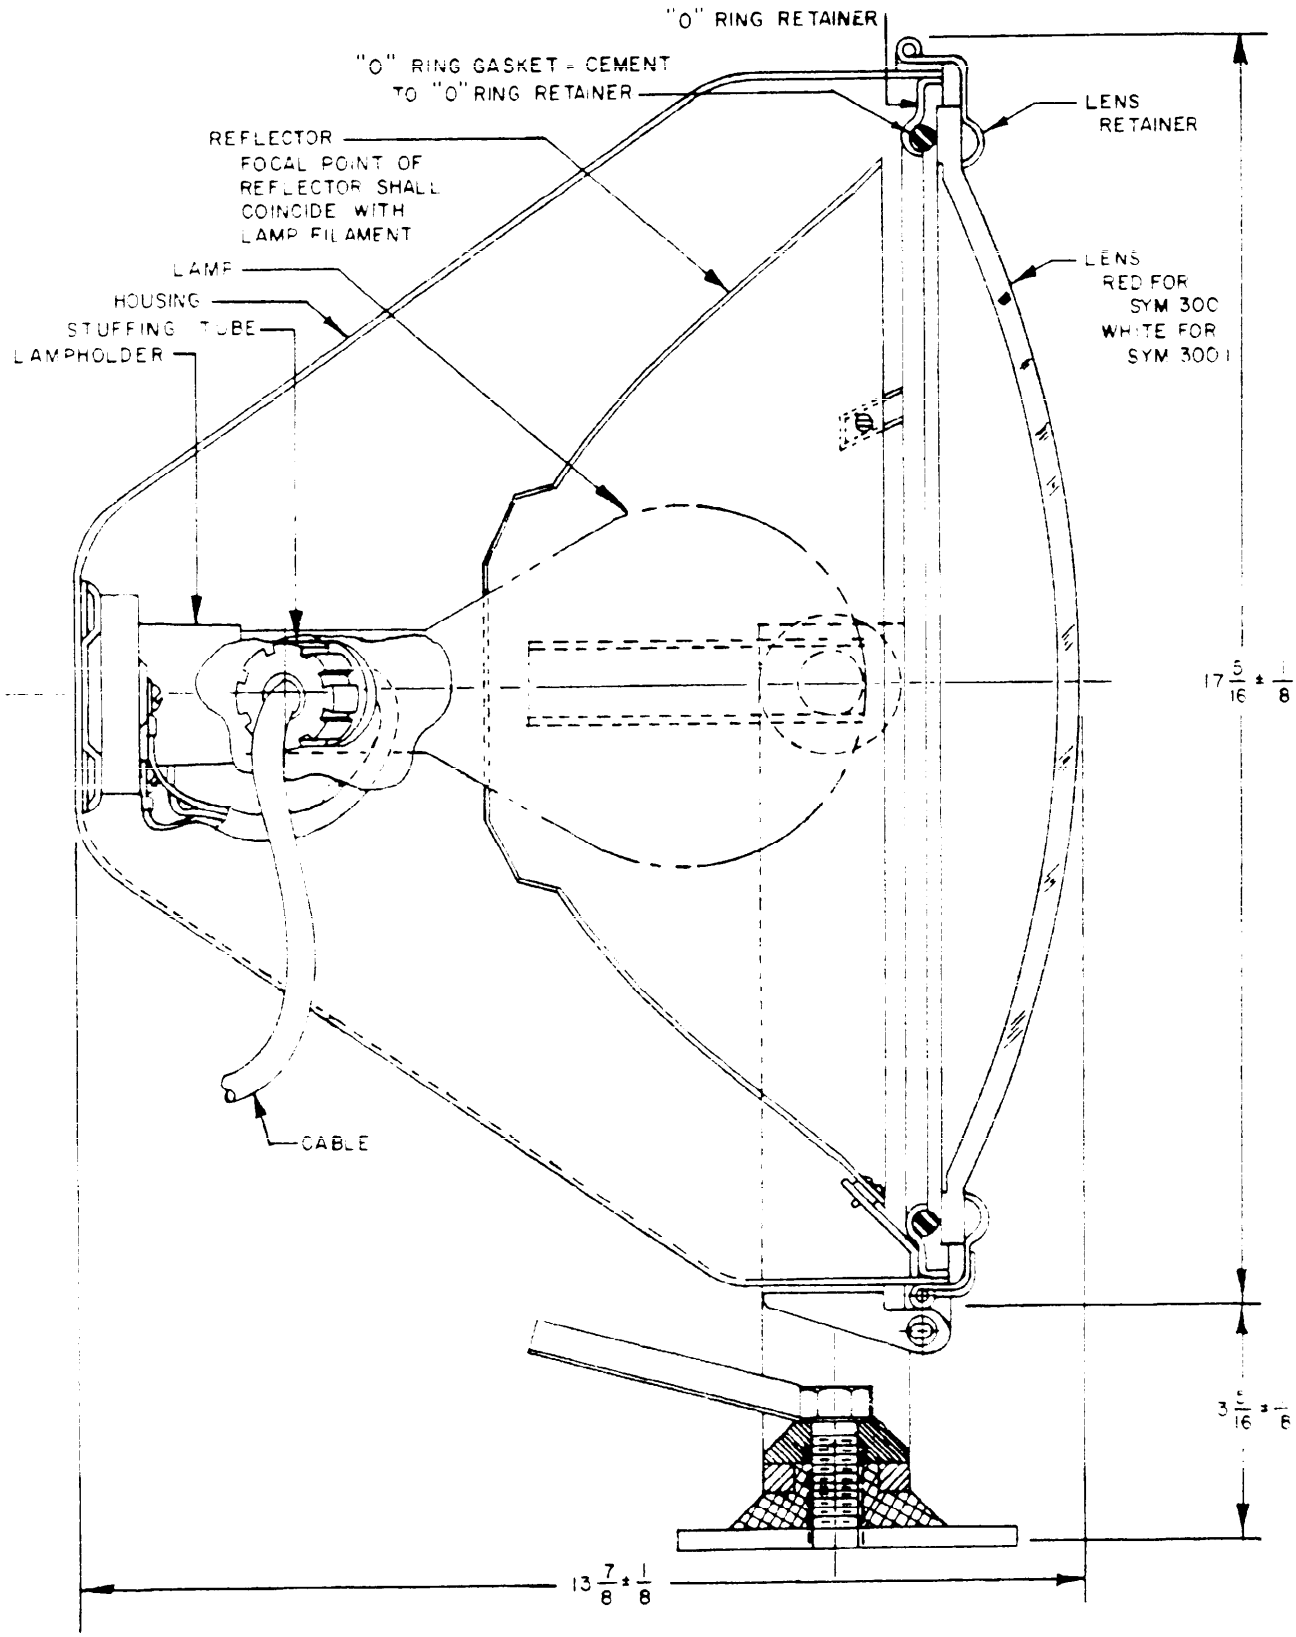


FIGURE 3. Floodlight, typical cut-away side view.


Source: https://assist.dla.mil -- Downloaded: 202610-18T08:52Z
Check the source to verify that this is the current version before use.

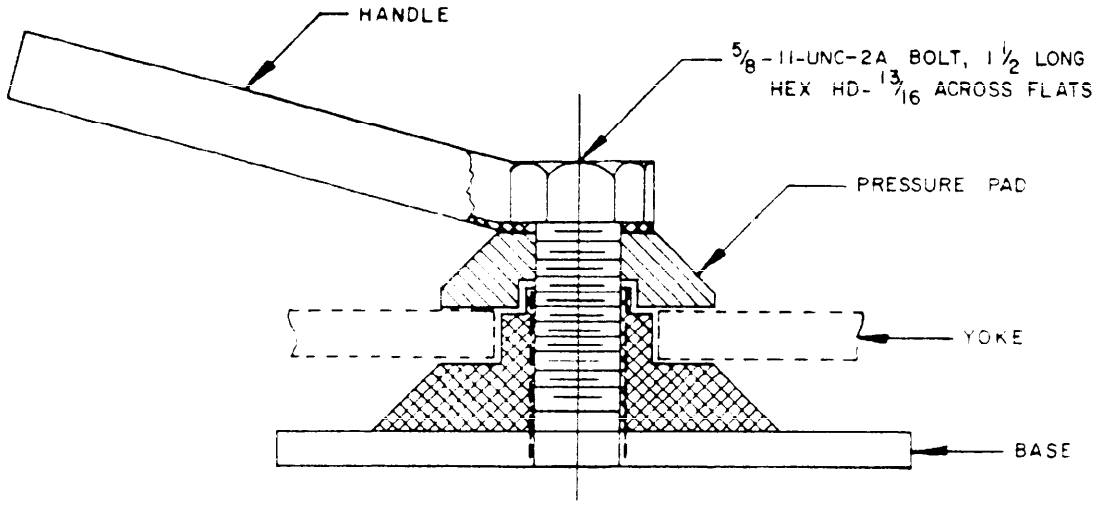


A. ASSEMBLY

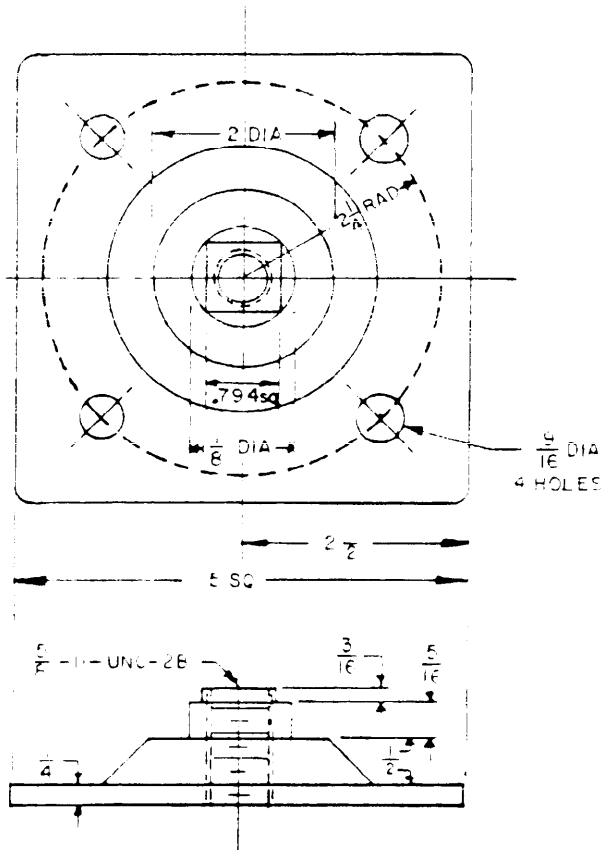

B. BASE

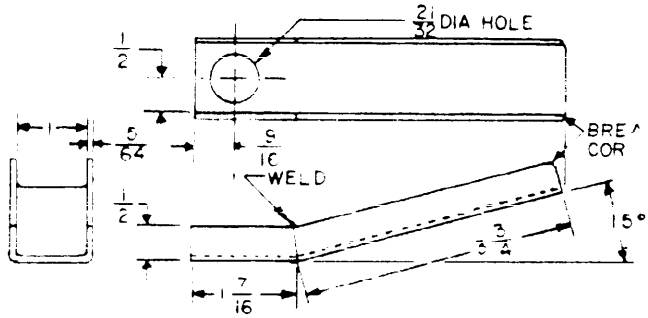


C. HANDLE

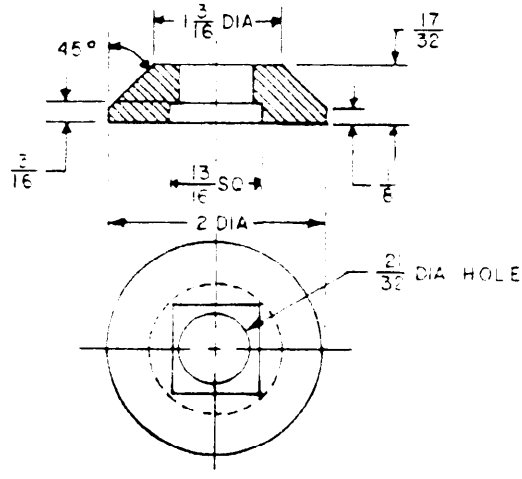


D. PRESSURE PAD

FIGURE 4. Mounting base assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

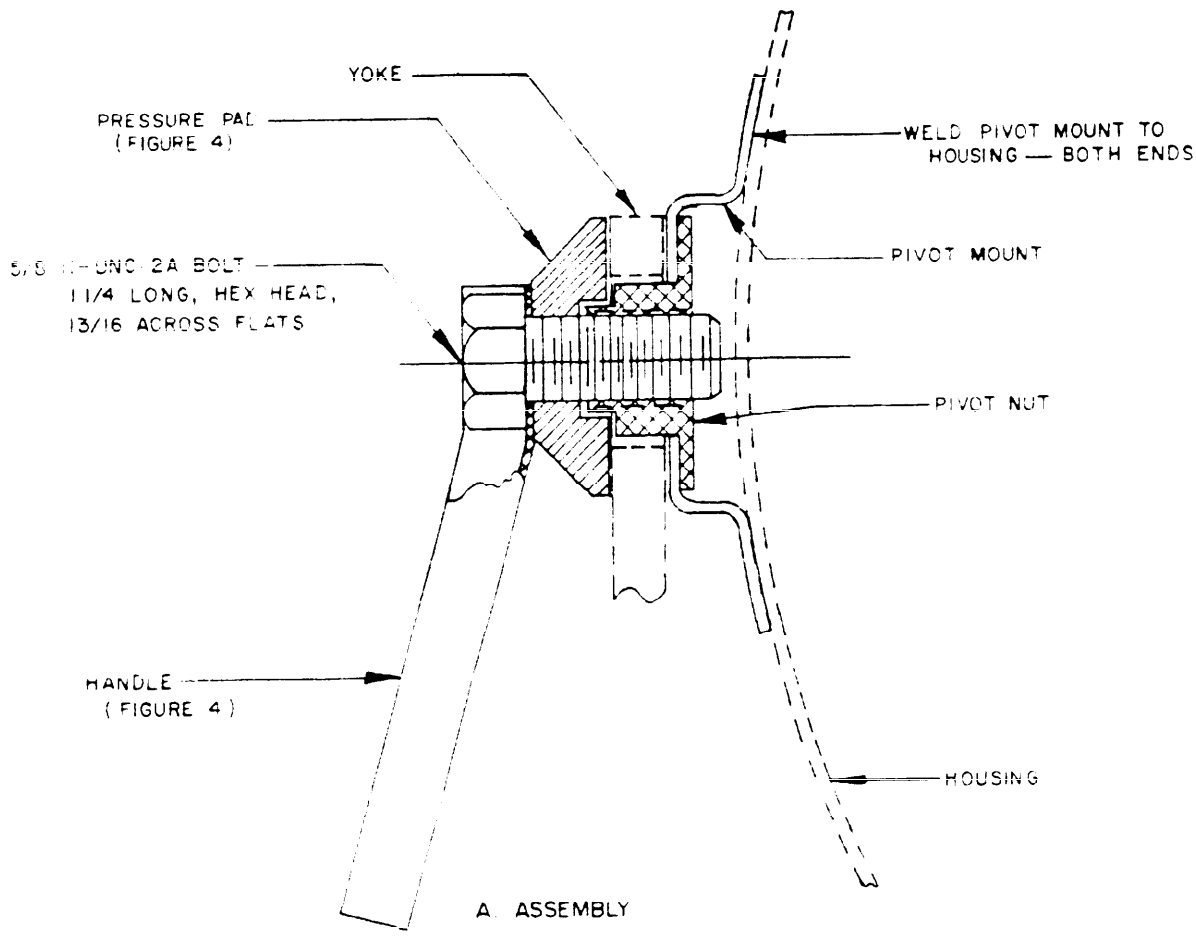

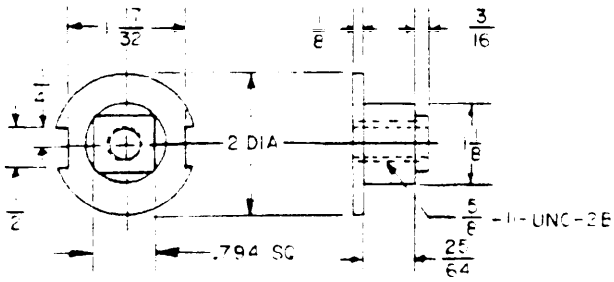



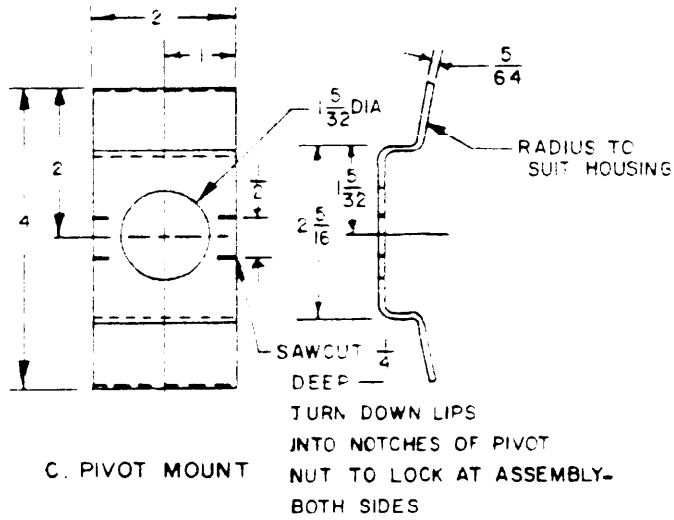


FIGURE 5. Yoke locking assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

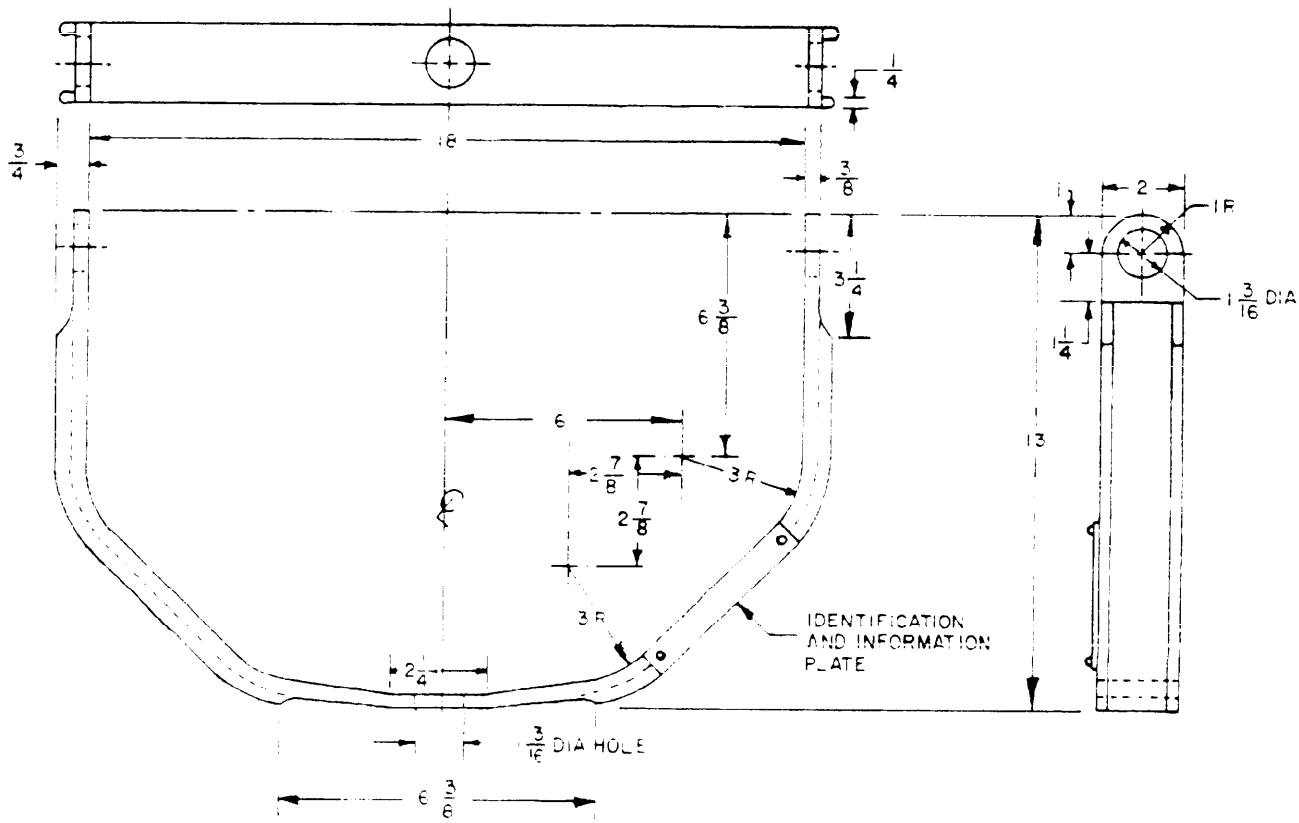

A. ASSEMBLY

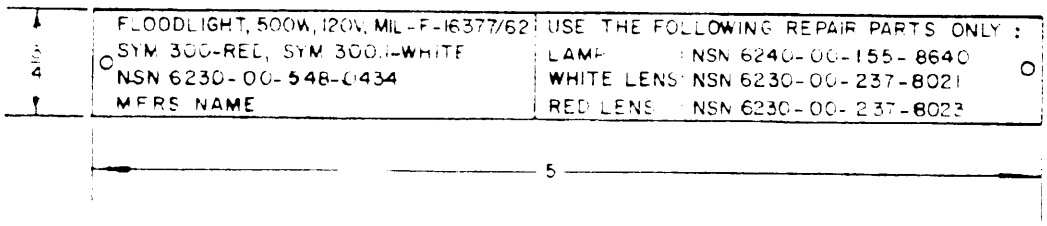

B. IDENTIFICATION AND INFORMATION PLATE

FIGURE 7. Yoke assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:52Z
Check the source to verify that this is the current version before use.

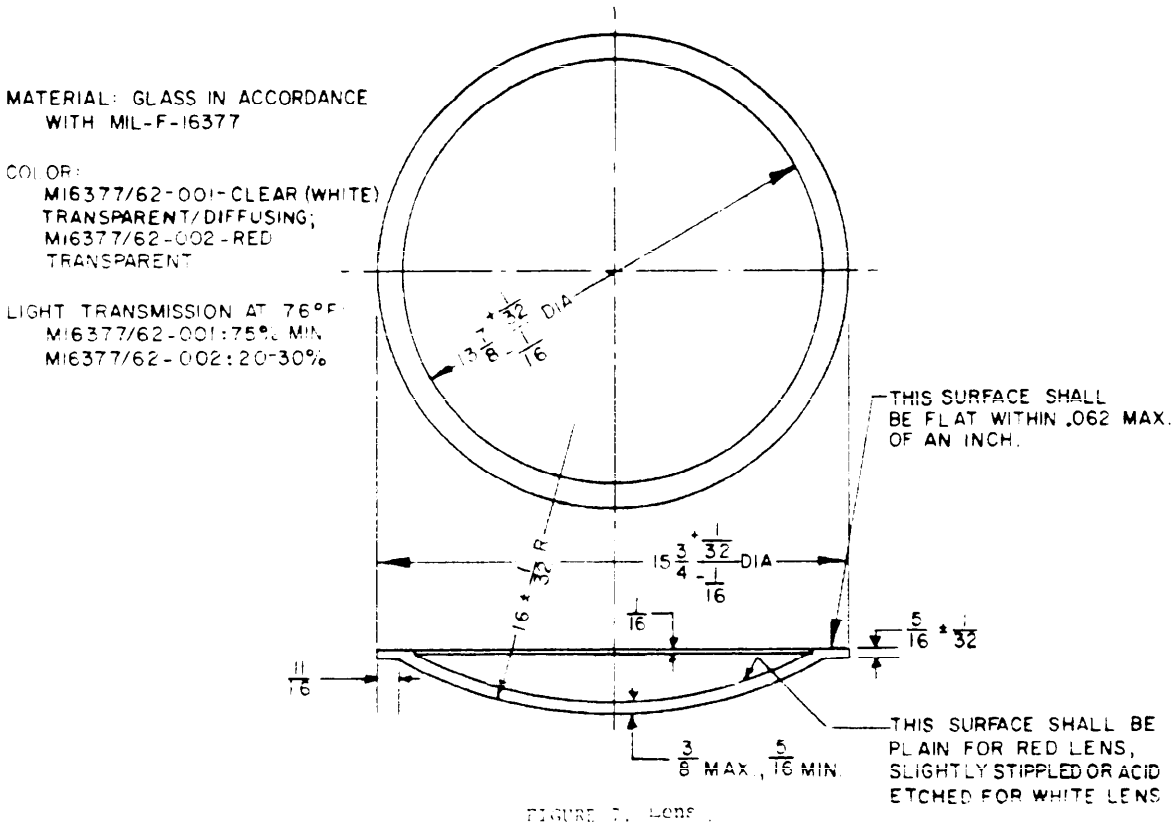


FIGURE 7. Lens.


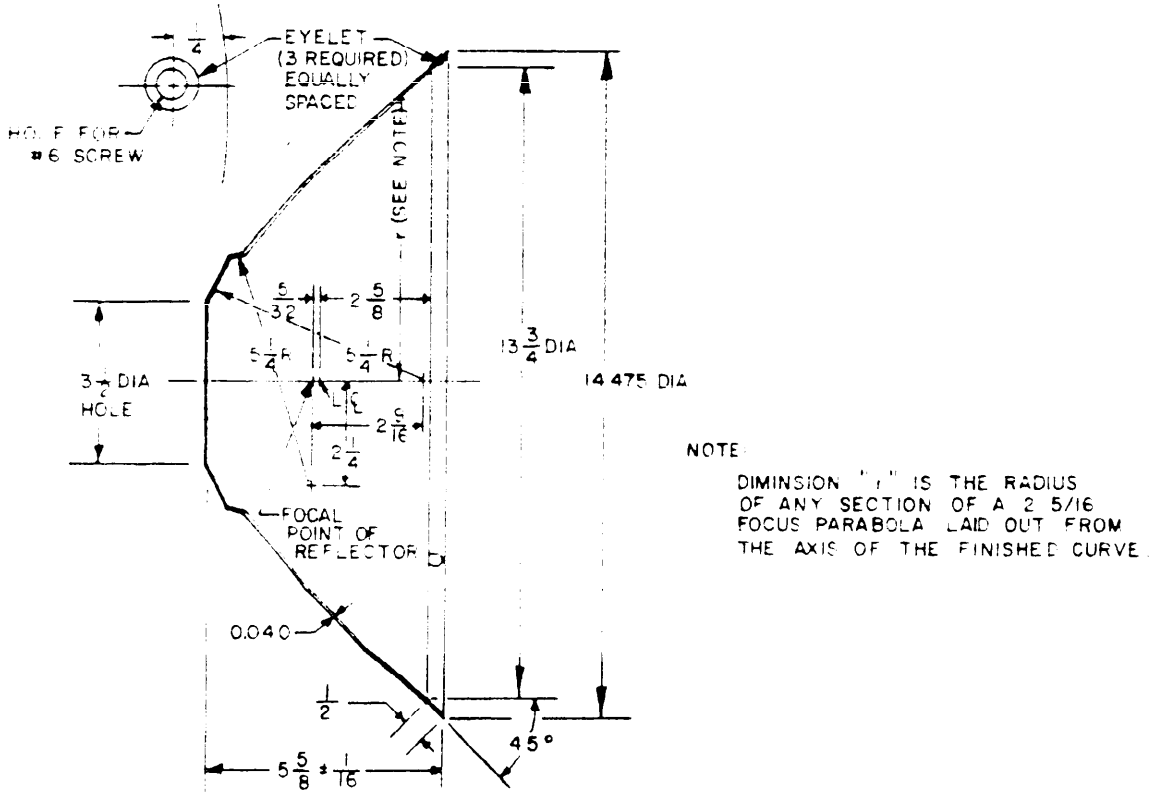


FIGURE 8. Reflector.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:52Z
Check the source to verify that this is the current version before use.

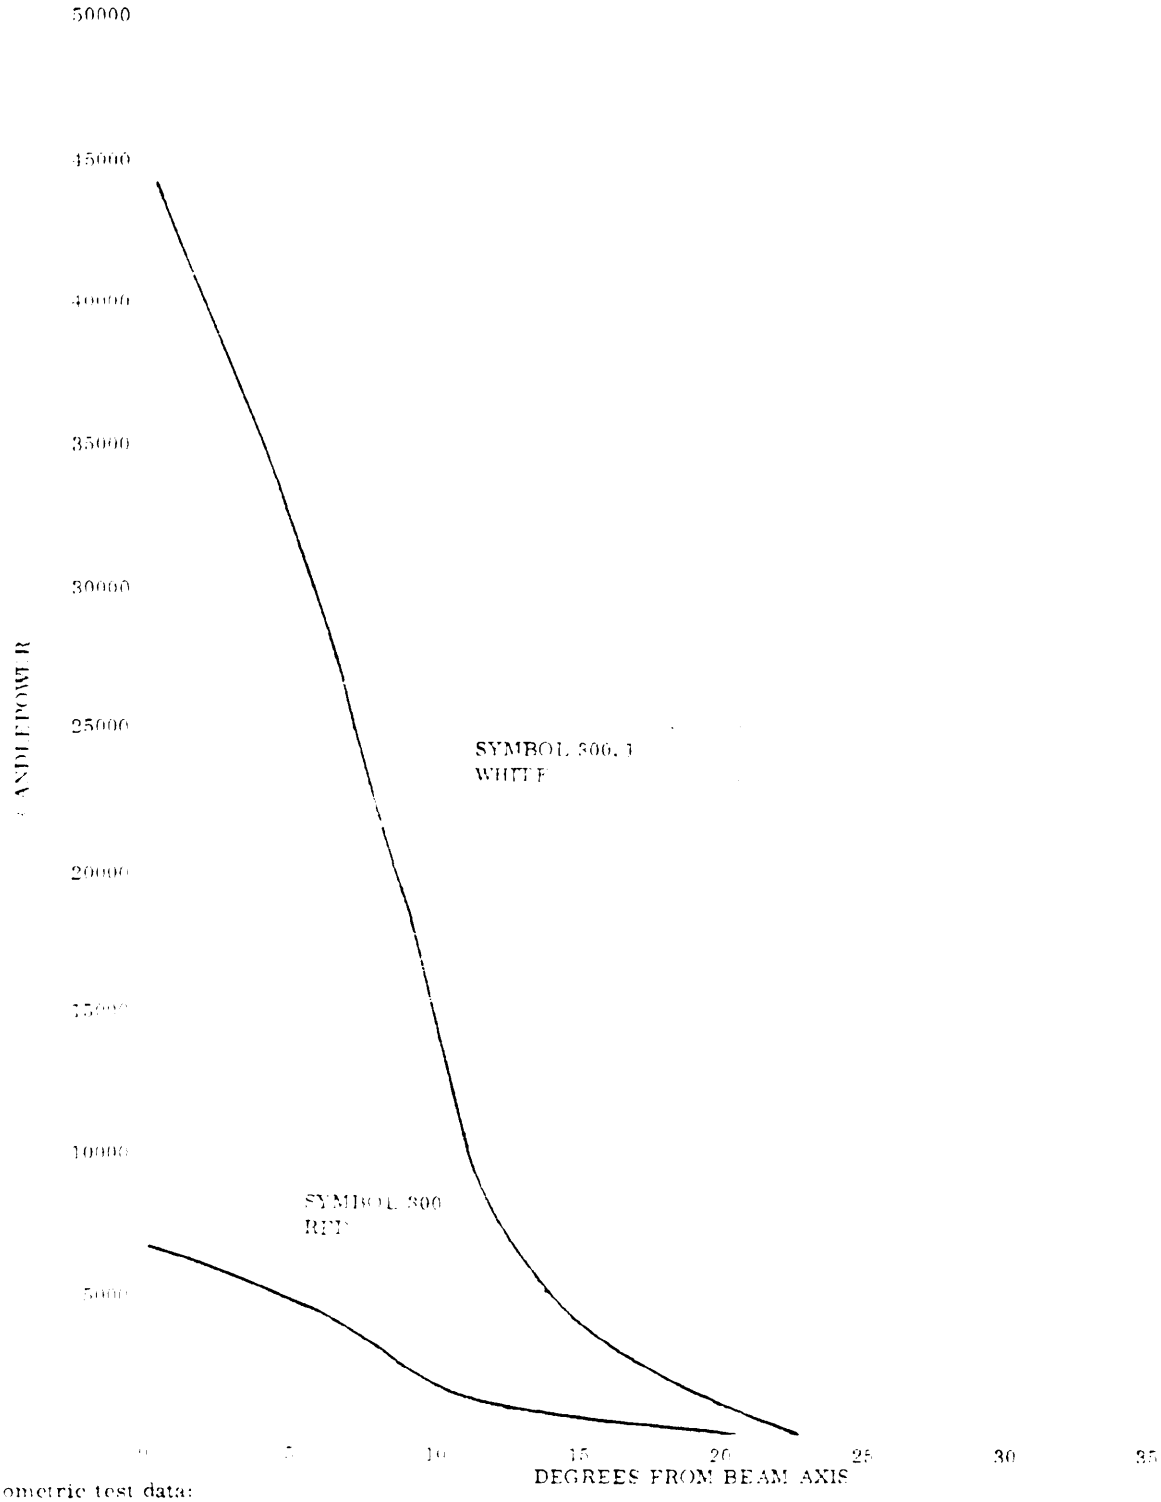

Photometric test data:
Distance: 25 feet.
Voltage: 120 volts.
Ambient temperature: 76°F.
Test lamp: 500 watts, 120 volts, Industry Number 500PS40/120V, will be furnished by the laboratory.

FIGURE 9. Candlepower distribution curves for Symbols 300 and 300.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: II
Class: 2

SYMBOL NUMBERS:

300 : Floodlight, incandescent, 500 watts, 120 volts, red.
300.1: Floodlight, incandescent, 500 watts, 120 volts, white.

DESIGN:
Electrical rating: 500 watts, 120 volts.
Dimensions and configuration: See figures 1 through 8.
Material: Material for "Z" bracket, latch spring, latch and hinge pins, bolts for yoke and mounting base, and fastening hardware shall be corrosion resistant steel. Material for other metal parts shall be aluminum alloy, type 6061-T6, or corrosion resistant steel.
Enclosure: Watertight.
Lamp: Lamp shall be incandescent, 500 watts, 120 volts, PS-40, mogul screw. Industry Number 500PS40/120 in accordance with W-L-101/36. Lamp shall not be furnished.
Cable: Floodlights shall be furnished with 10 feet of 3-conductor cable, type THOF-3 in accordance with MIL-C-915/6. The third conductor shall be used for grounding. Terminal lugs conforming to MS17343-11 shall be used.
Lampholder: Lampholder shall be MIL-L-970/8.
Reflector: Reflectory shall be aluminum pre-finished lighting sheet in accordance with MIL-F-16377.
"O" Ring Gasket: Size shall be, 15 1/2 O. D., 14 3/4 I. D. Material shall be neoprene rubber, 40-45 durometer.
Enclosure effectiveness: Watertight.
Photometric data: See figure 9.
Lens: See figure 7.
Nylon stuffing tube: Nylon stuffing tube shall be Size 2, part number M19622/1-002 of Military Specification Sheet MIL-S-19622/1. Packing assembly and "O" ring shall be as specified in MIL-S-19622/1 for Size 2 tube.
Weight: pounds maximum.
Designation and marking: An identification plate shall be furnished in accordance with MIL-F-16377. Information and location shall be as shown on figure 6.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:
First article inspection:
Complete floodlights: See table I.
Lenses: See table II.
Quality conformance:
Comparison inspection: Same as first article inspection.
Inspection of product for delivery:
Examination: See MIL-F-16377.
Examination for preparation for delivery: See MIL-F-16377.
Quality conformance tests: See MIL-F-16377.

GENERAL INFORMATION:
A. Assignment of Military part numbers and general information is shown in table III.
B. Supersession data.
Complete floodlights. Symbols 300 and 300.1 were previously covered by NAVSHIPS Drawing 6-5-5452-1.
Lenses, part numbers M16377/62-002 and M16377/62-003 were previously covered by Military Standard MS17227, parts MS17227-11 and MS17227-8 respectively.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:52Z
Check the source to verify that this is the current version before use.

TABLE I. First article and comparison inspection for complete floodlights.

Tests	Requirement paragraph of MIL-F-16377	Test paragraph of MIL-F-16377	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Shock	3.5.12	4.8.7	1/
Vibration	3.5.13	4.8.8	1/
Enclosure effectiveness	3.5.11	4.8.14	Watertight
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Grounding circuit	3.6.13.3	4.8.11	
Salt spray	3.5.15	4.8.10	

1/ Floodlight for this test shall be mounted in a manner similar to that shown on figure 3.

TABLE II. First article and comparison inspection for lenses.

Tests	Requirement paragraph of MIL-F-16377	Test paragraph of MIL-F-16377	Remarks
Examination	3.13	4.5	
Optical uniformity	3.7.4.1.1	4.8.4	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Mechanical shock	3.7.5.6	4.8.17.3	6 ft. lbs.
Thermal shock	3.7.5.7	4.8.17.4	
Beamage pattern	3.7.5.8	4.8.17.6	
Color and luminous transmittance	3.7.3.1	4.8.6.1	

TABLE III. Assignment of part numbers and general information.

Military Part Number	Item Name	National Stock Number (NSN)
001	Complete floodlight, Part M16377/62-001 and red lens, part M16377/62-002	6230-00-548-0434 6230-00-237-8022
001.1	Complete floodlight, part M16377/62-001 and white lens, part M16377/62-003	6230-00-548-0434 6230-00-237-8021
001.	Complete floodlight as detailed in this specification but without lamp and lens	6230-00-548-0434
	lens - red	6230-00-237-8022
	lens - white	6230-00-237-8021
	"O" ring gasket	--

Preparing activity:
Navy - SH
(Project 6230-NOTE)

Source: https://assist.dla.mil -- Downloaded: 20260-18T08:52Z
Check the source to verify that this is the current version before use.