MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; INCANDESCENT, GENERAL LIGHTING, DECORATIVE,

150 WATTS, 120 VOLTS, DRIPPROOF 15 DEGREES, SYMBOL 67

The specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377(SH).

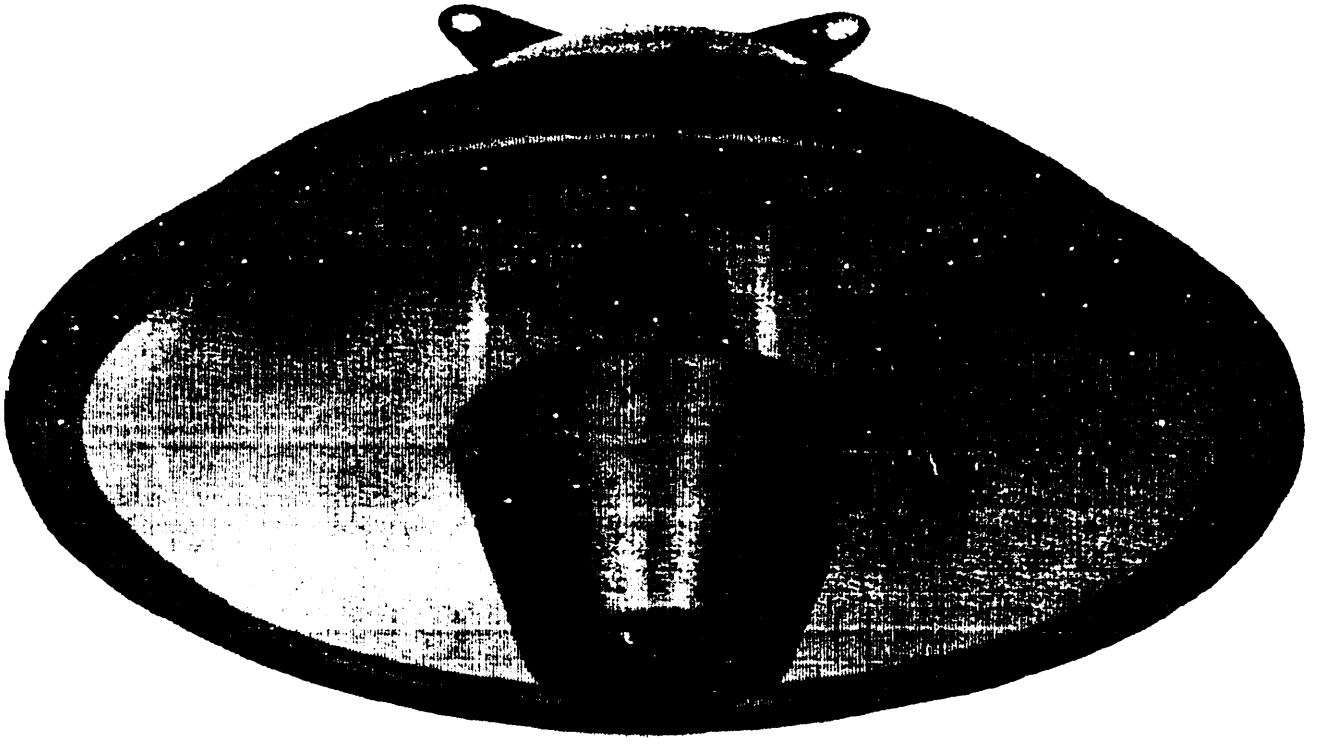


FIGURE 1. Fixture, incandescent, Symbol 67.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.

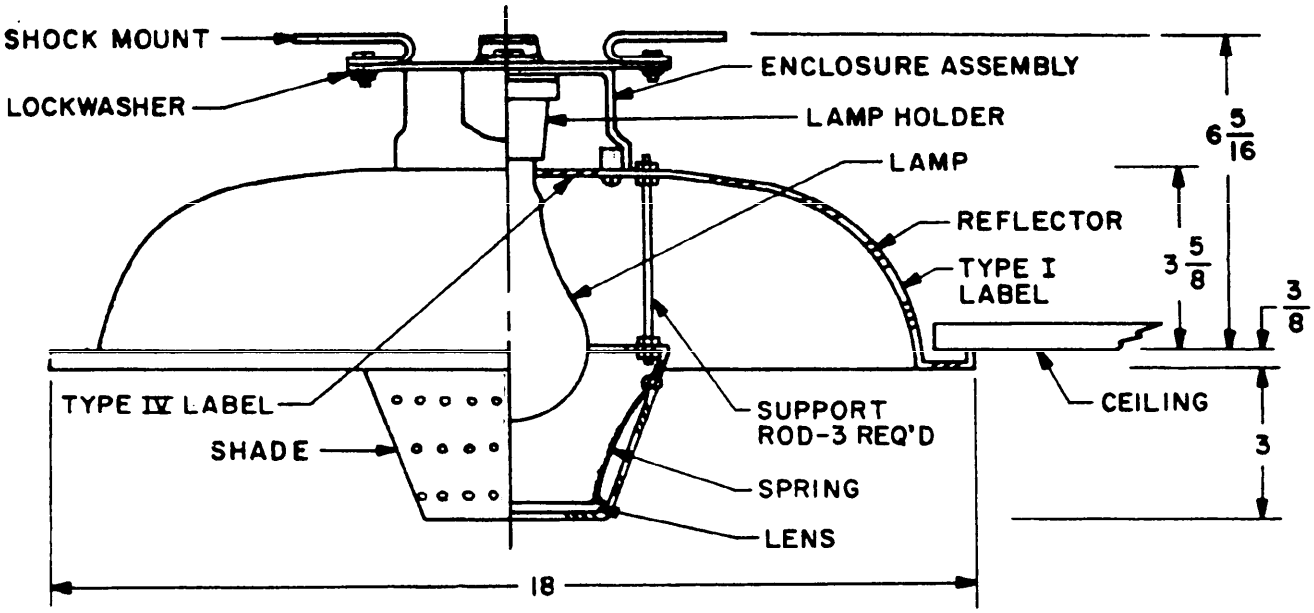


FIGURE 2. Fixture assembly.

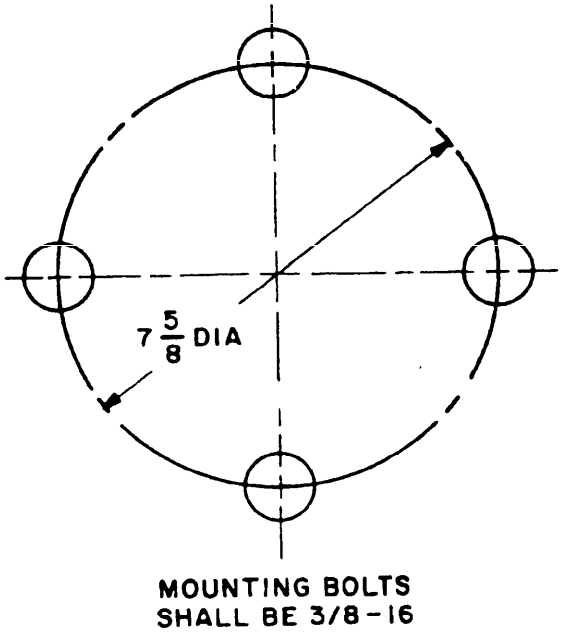


FIGURE 3. Mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.


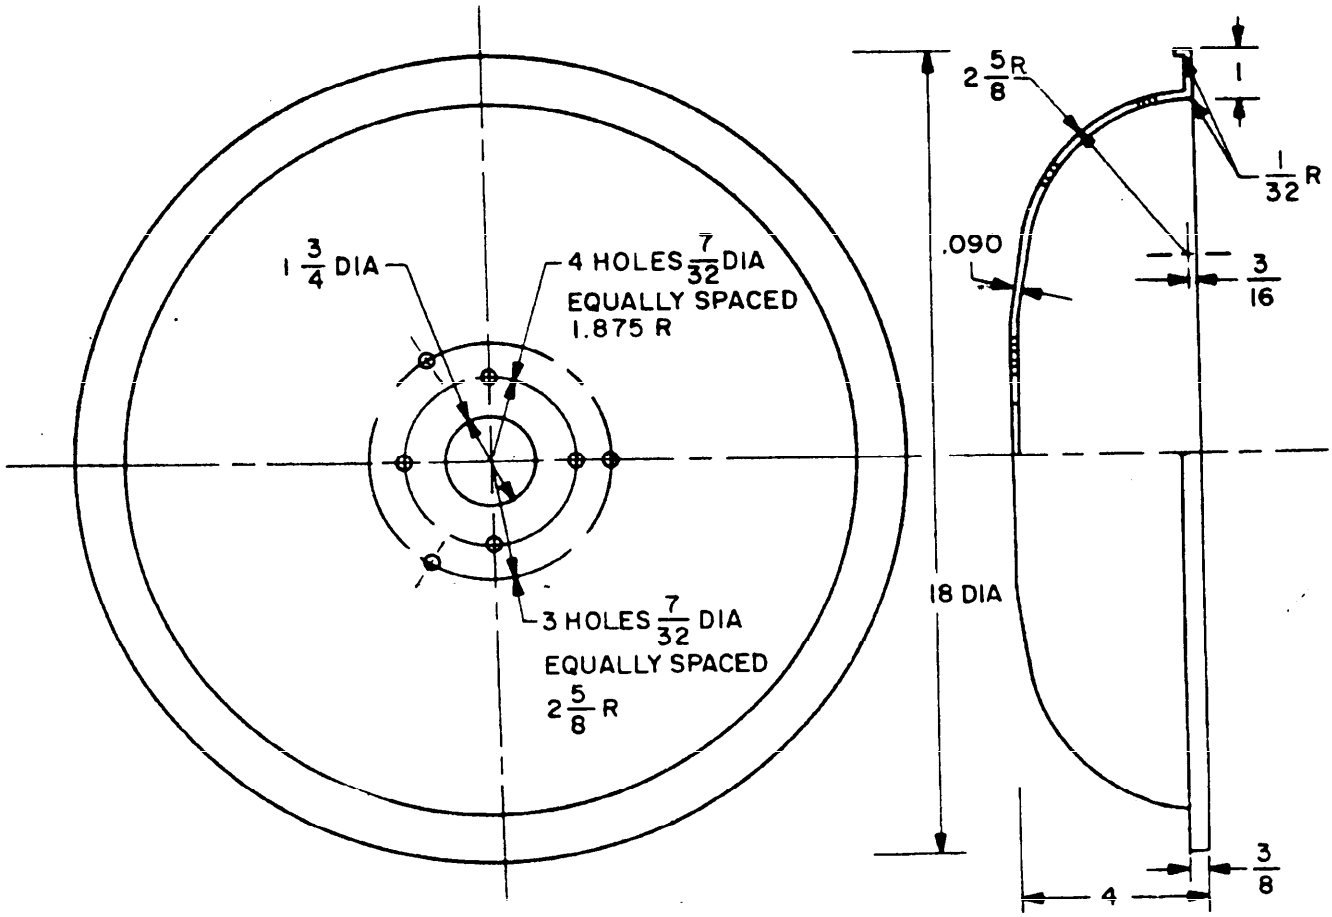


FIGURE 4. Reflector.

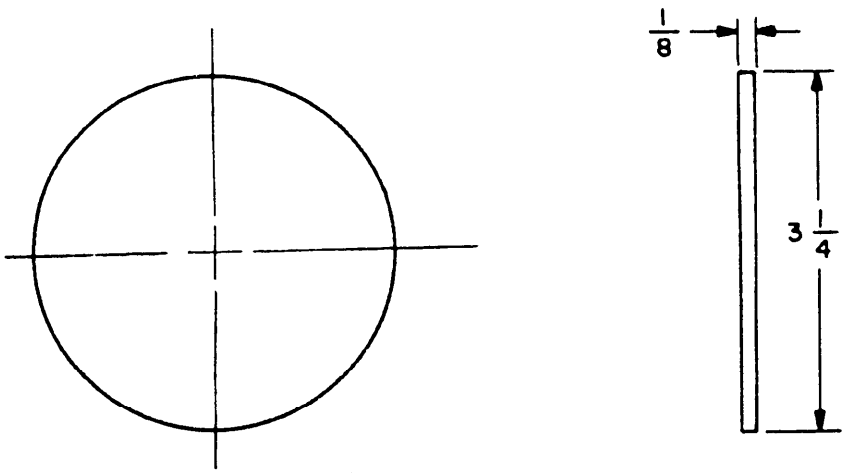

MATERIAL : HIGH-IMPACT, HEAT RESISTANT GLASS

COLOR : CLEAR TRANSPARENT WITH ONE SIDE MADE DIFFUSING

TRANSMITTANCE : 70-85% AT 76°F.

FIGURE 5. Lens.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.

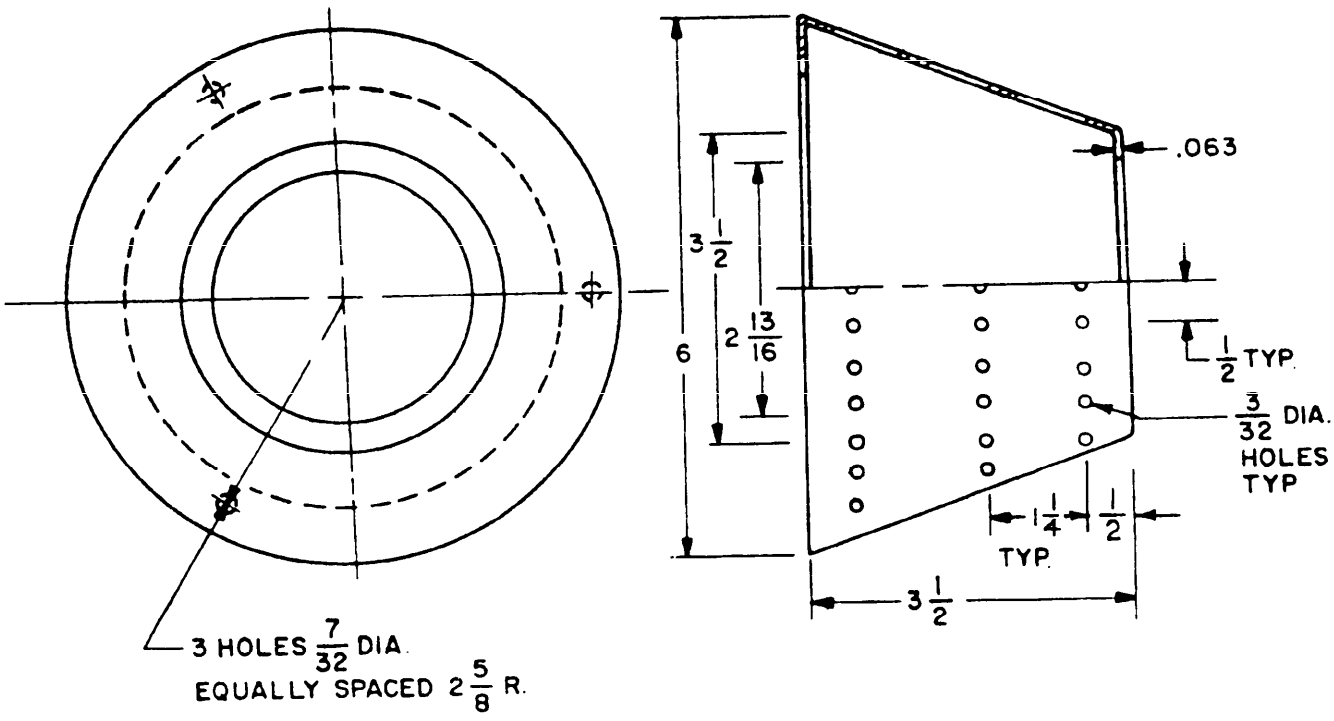


FIGURE 6. Shade.

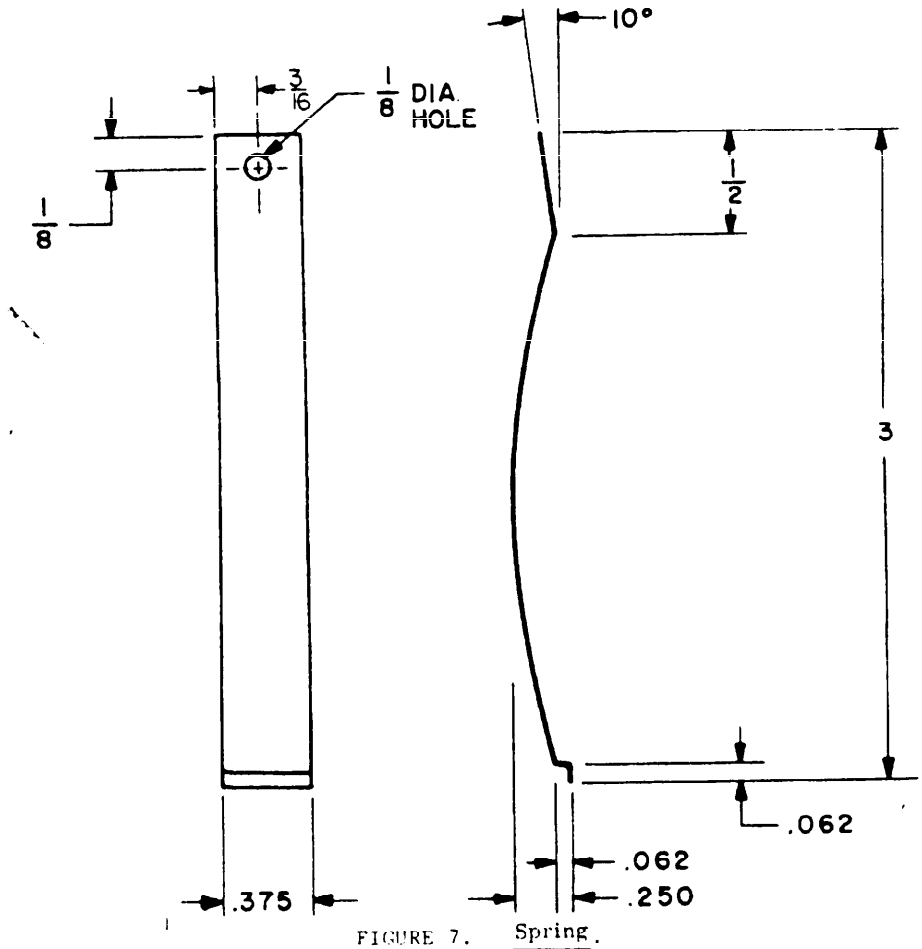


FIGURE 7. Spring.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.


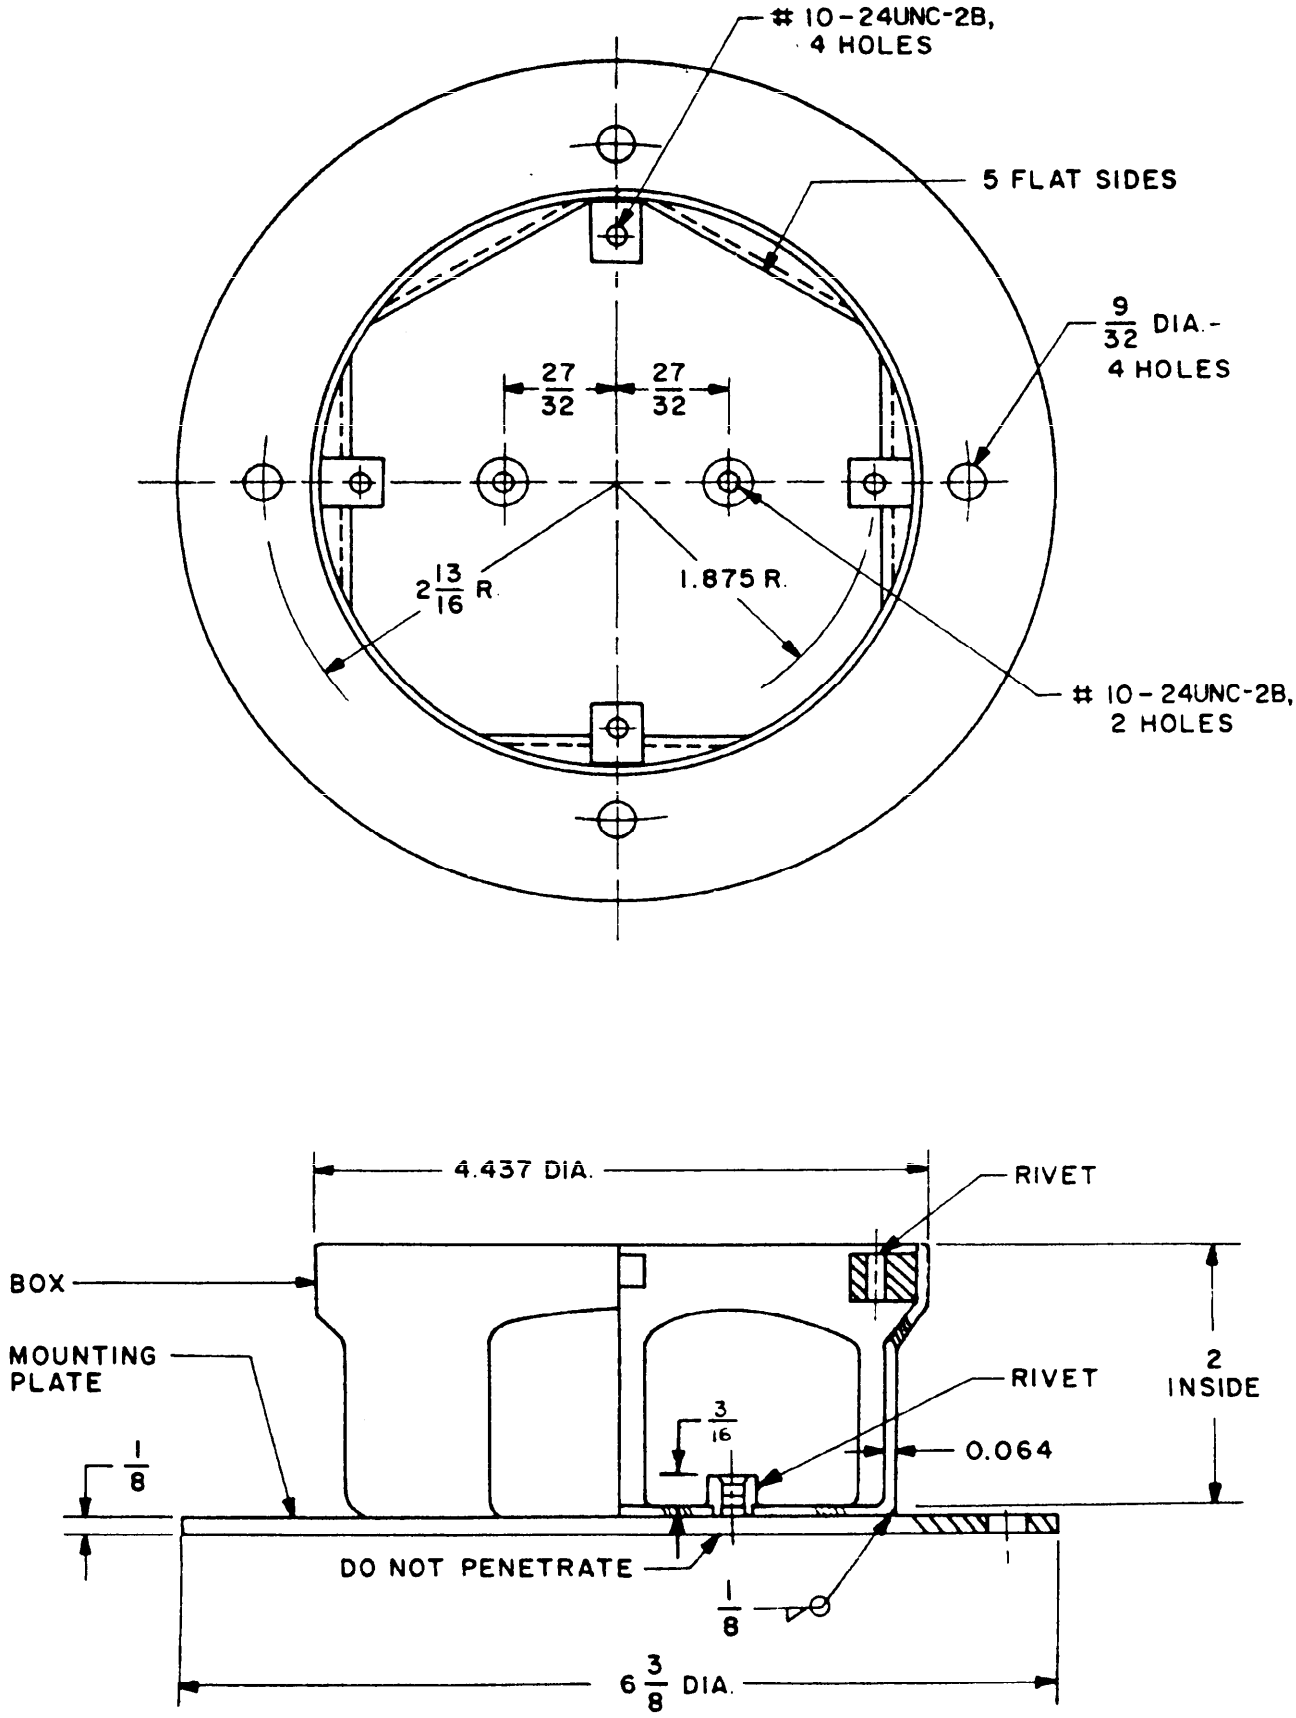


FIGURE 8. Enclosure assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.

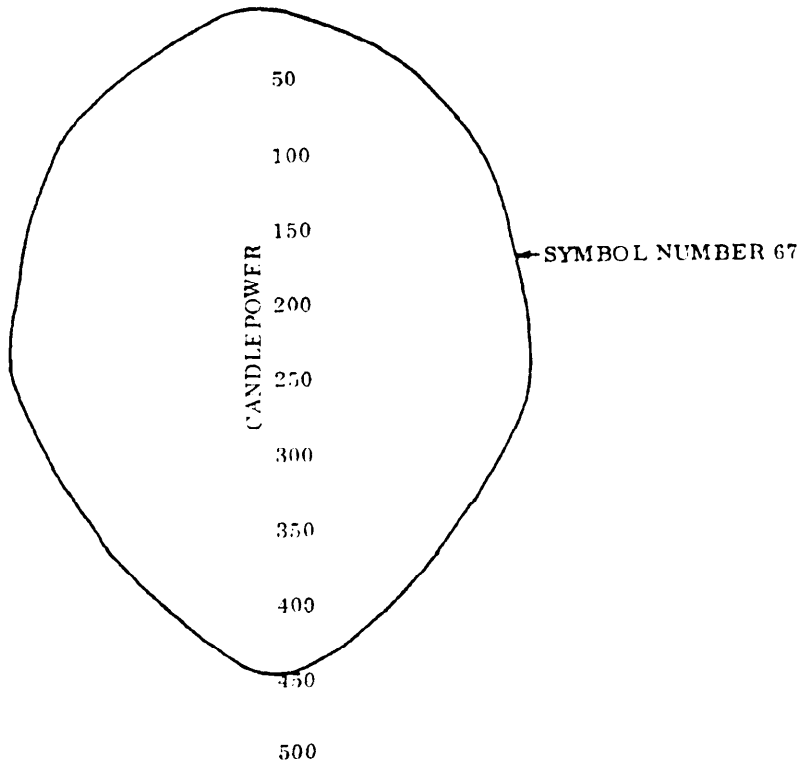

ANGLE	SYMBOL NUMBER 67
0	447
5	432
10	410
15	385
20	359
25	336
30	316
35	291
40	252
45	219
50	193
55	165
60	132

ANGLE	SYMBOL NUMBER 67
65	97
70	61
75	30
80	10
85	5
90	3
95	0
100	0
105	0
110	0
115	0
120	0
125	0

Photometric test data:

Distance: 10 feet.
Voltage: 120 volts.
Ambient temperature: 76°F.
Test lamp, 150 watts, rough service, conforming to W-L-101/81 will be furnished by laboratory.

FIGURE 9. Candlepower distribution curve.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CLASSIFICATION:
Type: II
Class: 2

SYMBOL NUMBER:
67: Complete incandescent lighting fixture for use in decorative general lighting.

DESIGN:
Electrical rating: 150 watts, 120 volts.
Dimensions and configuration: See figures 1 to 8.
Enclosure assembly, including mounting plate and tapped rivets: Aluminum.
Reflector: Aluminum
Shade: Aluminum
Spring: Spring grade corrosion resistant steel, 0.015 thick.
Lampholder: MIL-L-970/6.
Shockmounts: MIL-F-16377/41, Part Number M16377/41-009.
Enclosure: Dripproof.
Finish:
Enclosure assembly: White paint in accordance with MIL-F-16377.
Reflector: Gold anodize entire reflector over satin finish. Paint inside reflecting surface white to 3/8 of an inch of rim.
Shade: Gold anodize entire shade over satin finish.
Weight: 6 lbs 8 oz. maximum
Distribution curves: Candlepower (see figure 9).
Lamp: This fixture shall be designed to accommodate a 150-watt, 120 volts, A-23 rough service incandescent lamp, Industry Number 150A/RS conforming to W-L-101/81. (Lamp not furnished).
Designation and marking: The following labels shall be furnished in accordance with MIL-F-16377 applied as shown in figure 2.

(a) Two type I
(b) One type IV. The information to be shown on the type IV label shall be "USE LAMP NSN 6240-00-143-3105.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:
First article inspection: See table I
Quality conformance:
Comparison inspection: Same as the first article inspection

Inspection of product for delivery:
Examination: See MIL-F-16377
Examination for preparation of delivery: See MIL-F-16377
Quality conformance tests: See MIL-F-16377

GENERAL INFORMATION:

Assignment of MIlitary part numbers and general information is as follows:
(a) Military Part Number: M16377/64-67.
(b) National Stock Number: Not yet assigned.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:53Z
Check the source to verify that this is the current version before use.

TABLE I. First article and comparison inspection.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Shock	3.5.12	4.8.7	
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14.2	Dripproof
Dielectric	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Continuity of grounding	3.6.13.4	4.8.12	
Optical uniformity	3.7.4.1.1	4.8.4	
Light output	3.7.1	4.8.6.1	Candlepower
Magnetic permeability	3.4.8	4.8.18	

Preparing activity:
Navy - SH
(Project 6230-N568)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1983—661-032/3761 8-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.