MILITARY SPECIFICATION SHEET

FIXTURES, LIGHTING; WINDOW ASSEMBLIES, CLEAR WHITE SHIELDED,
TO BE USED FOR REPLACEMENT PARTS ONLY

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fixtures described herein shall consist of this document and the latest issue of MIL-F-16377 (SH).


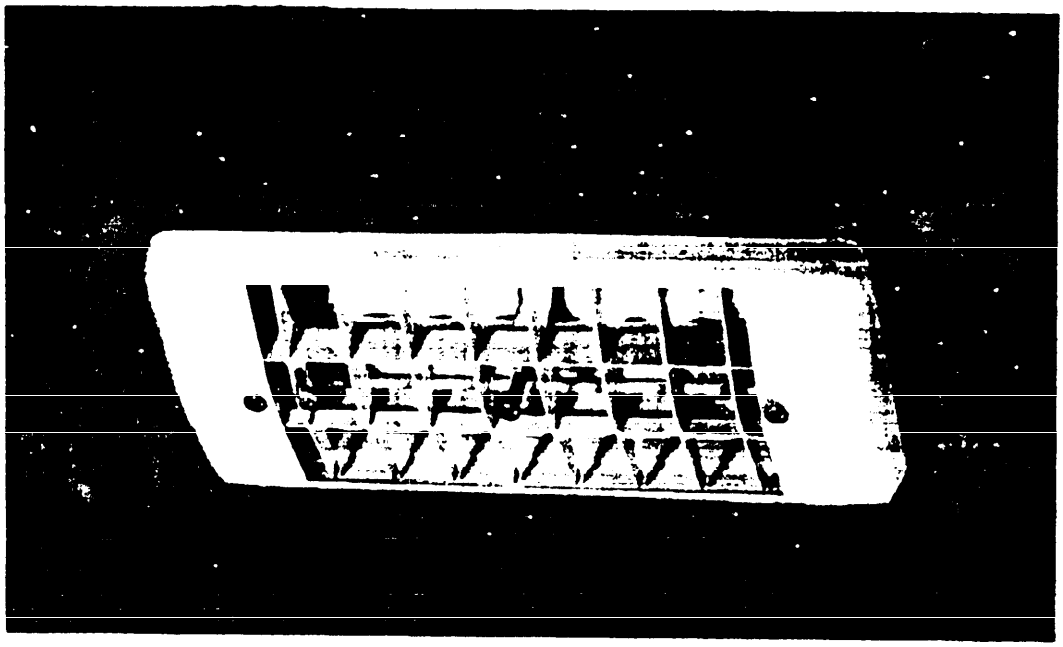


FIGURE 1. Typical clear white shielded window assembly.

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.

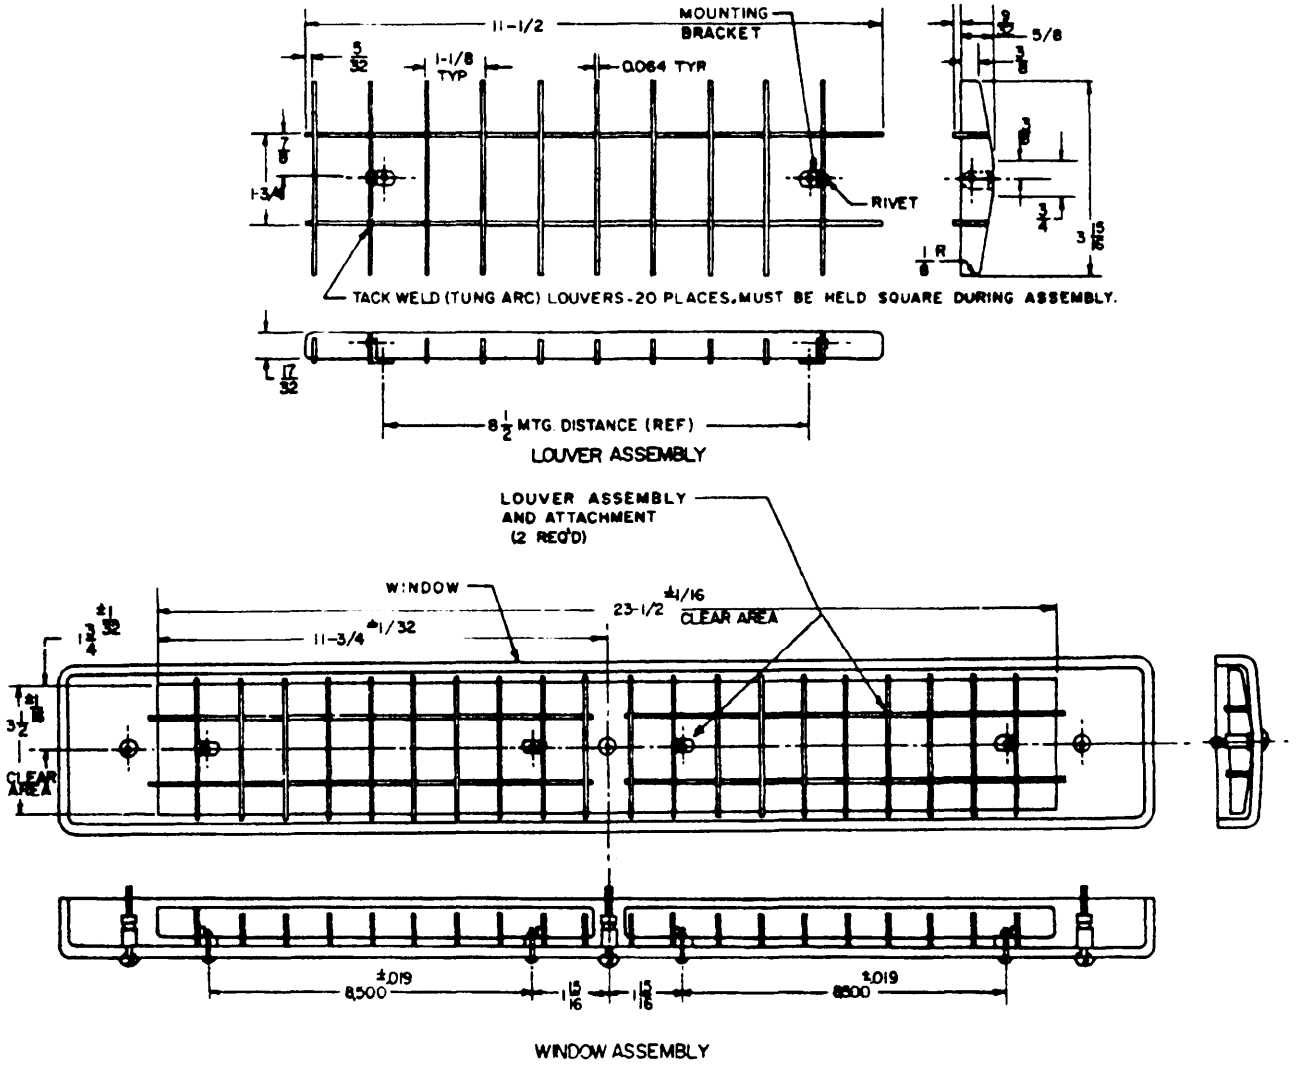


The window assembly shall be as shown herein and in accordance with figure 27 of MIL-F-16377, Military Part Number M16377/8-001 except as follows:

A. Material shall be 1/4 inch thick, clear acrylic plastic, type CLEAR-1 of MIL-P-24191.
B. Dimension "C" shall be 1-27/64.
C. Three long securing screw assemblies shall be installed.
D. The inside surface of the window, except where indicated as "CLEAR AREA", shall be finished white in accordance with 3.8.4.1 of MIL-F-16377.
E. The louver assembly shall comply with 3.7.4.2 of MIL-F-16377. It shall be finished white in accordance with 3.8.4.2 of MIL-F-16377.

FIGURE 2. Window assembly, clear white shielded for Symbols 347 and 347.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.

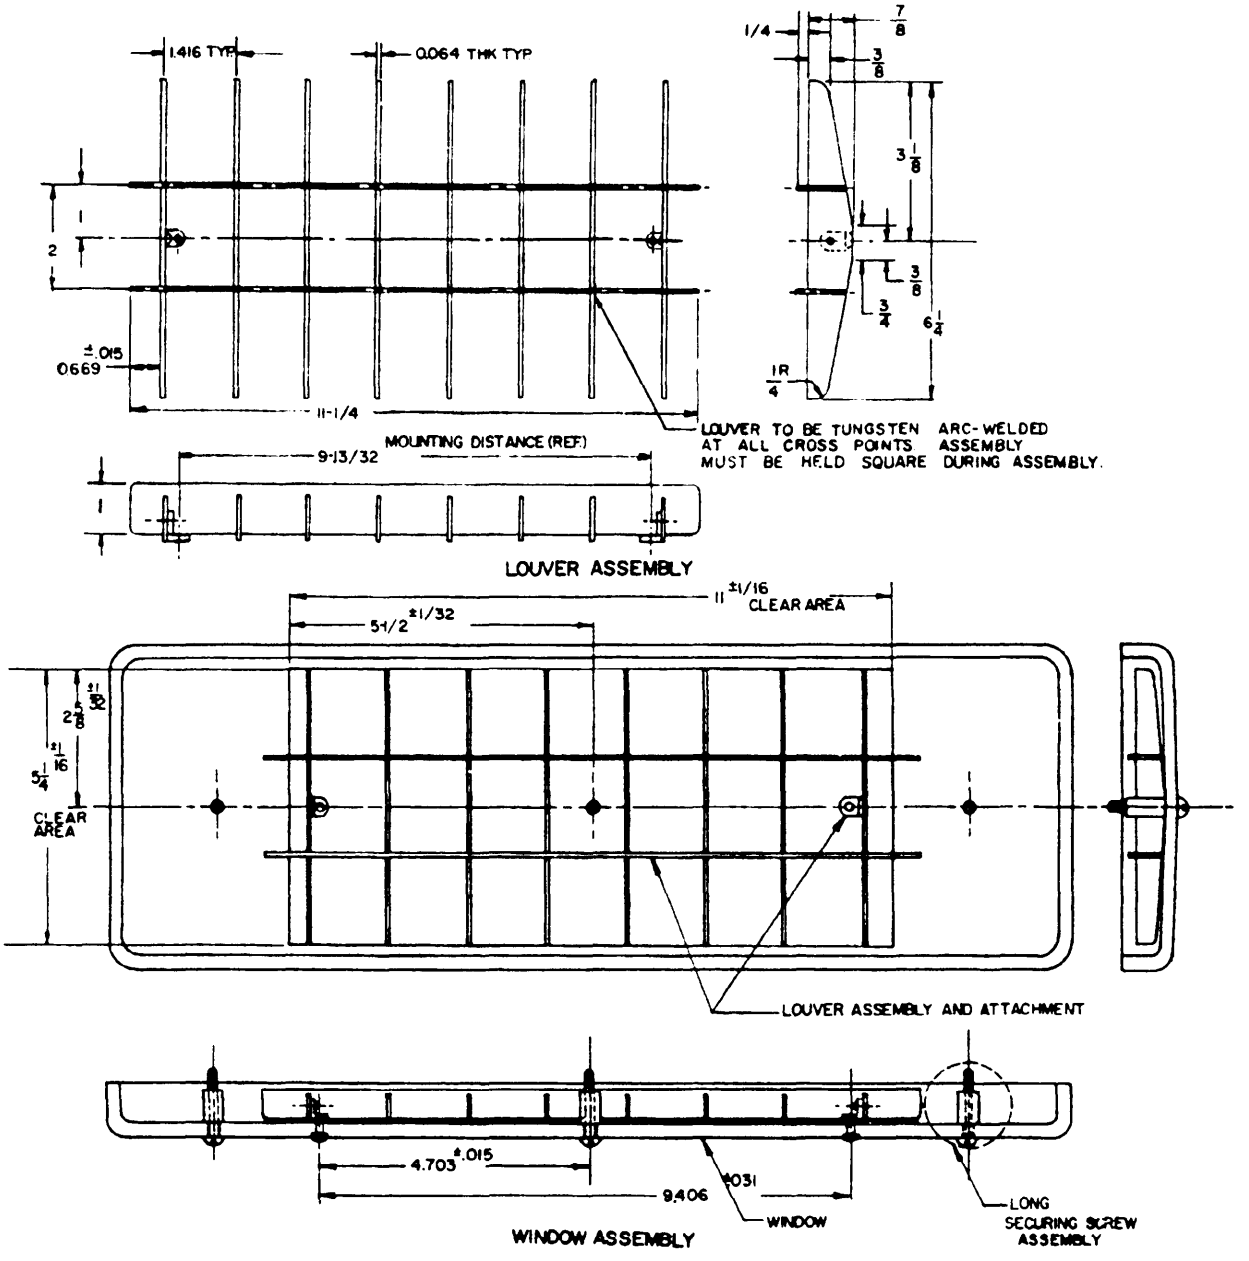


The window assembly shall be as shown herein and in accordance with figure 27 of MIL-F-16377, Military Part Number M16377/9-001 except as follows:


A. Material shall be 1/4 inch thick, clear acrylic plastic, type CLEAR-1 of MIL-P-24191.
B. Dimension "C" shall be 1-25/64.
C. Three long securing screw assemblies shall be installed.
D. The inside surface of the window, except where indicated as "CLEAR AREA" shall be finished white in accordance with 3.8.4.1 of MIL-F-16377.
E. The louver assembly shall comply with 3.7.4.2 of MIL-F-16377. It shall be finished white in accordance with 3.8.4.2 of MIL-F-16377.

FIGURE 3. Window assembly, clear white, shielded for Symbols 346 and 346.1.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:53Z
Check the source to verify that this is the current version before use.

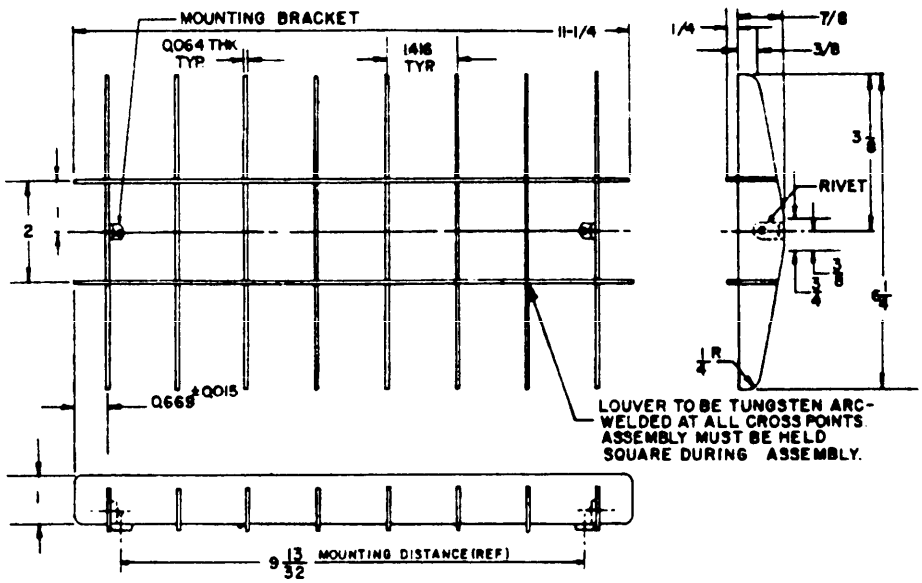

LOUVER ASSEMBLY

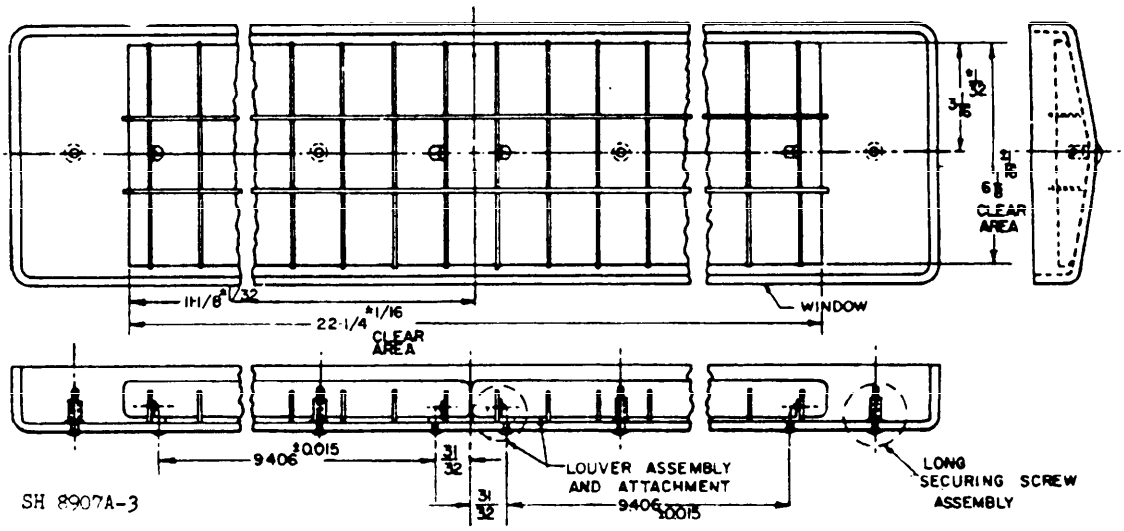


WINDOW ASSEMBLY

The window assembly shall be as shown herein and in accordance with figure 27 of MIL-F-16377, Military Part Number M16377/11-001, except as follows:


A. Material shall be 1/4 inch thick, clear acrylic plastic, type CLEAR-1 of MIL-P-24191.
B. Dimension "C" shall be 1-35/64.
C. Three long securing screw assemblies shall be installed.
D. The inside surface of the window, except where indicated as "CLEAR AREA" shall be finished white in accordance with 3.8.4.1 of MIL-F-16377.
E. The louver assembly shall comply with 3.7.4.2 of MIL-F-16377. It shall be finished white in accordance with 3.8.4.2 of MIL-F-16377.

FIGURE 4. Window assembly, clear white shielded for Symbols 344 and 344.1.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:53Z
Check the source to verify that this is the current version before use.

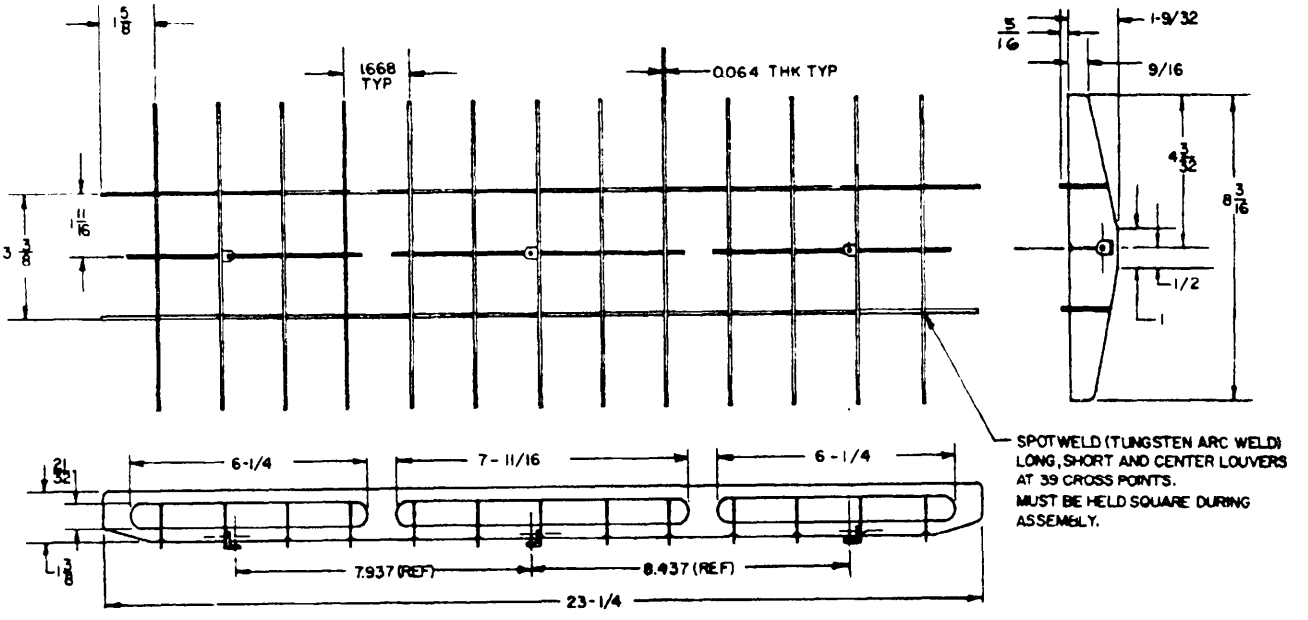

LOUVER ASSEMBLY

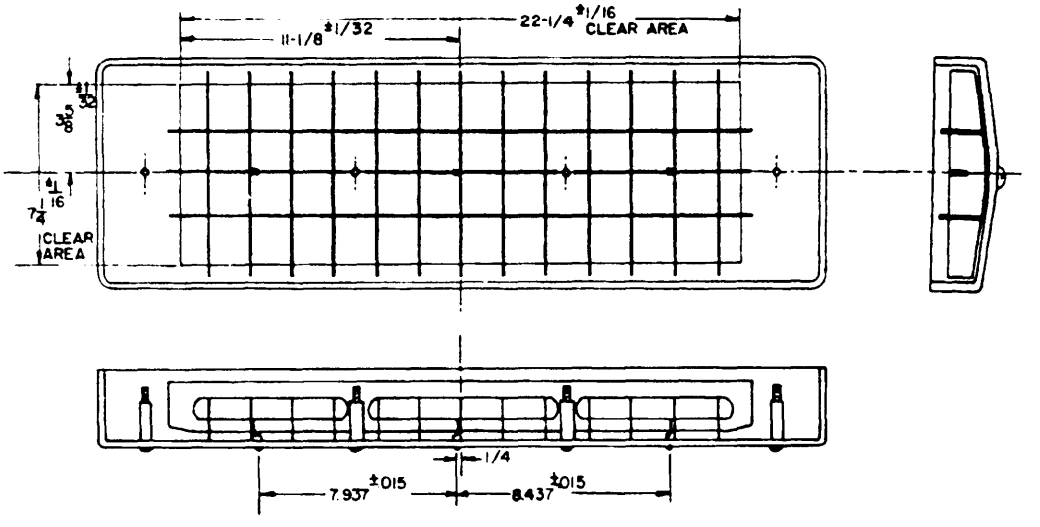


WINDOW ASSEMBLY

The window assembly shall be as shown herein and in accordance with figure 27 of MIL-F-16377, Military Part Number M16377/12-001 except as follows:

A. Material shall be 1/4 inch thick, clear acrylic plastic, type CLEAR-1 of MIL-P-24191.
B. Dimension "C" shall be 1-29/32.
C. Three long securing screw assemblies shall be installed.
D. The inside surface of the window, except where indicated as "CLEAR AREA", shall be finished white in accordance with 3.8.4.1 of MIL-F-16377.
E. The louver assembly shall comply with 3.7.4.2 of MIL-F-16377. It shall be finished white in accordance with 3.8.4.2 of MIL-F-16377.

FIGURE 5. Window assembly, clear white shielded for Symbols 342 and 342.1.

Source: https://assist.dla.mil -- Downloaded: 202640-18T08:53Z
Check the source to verify that this is the current version before use.

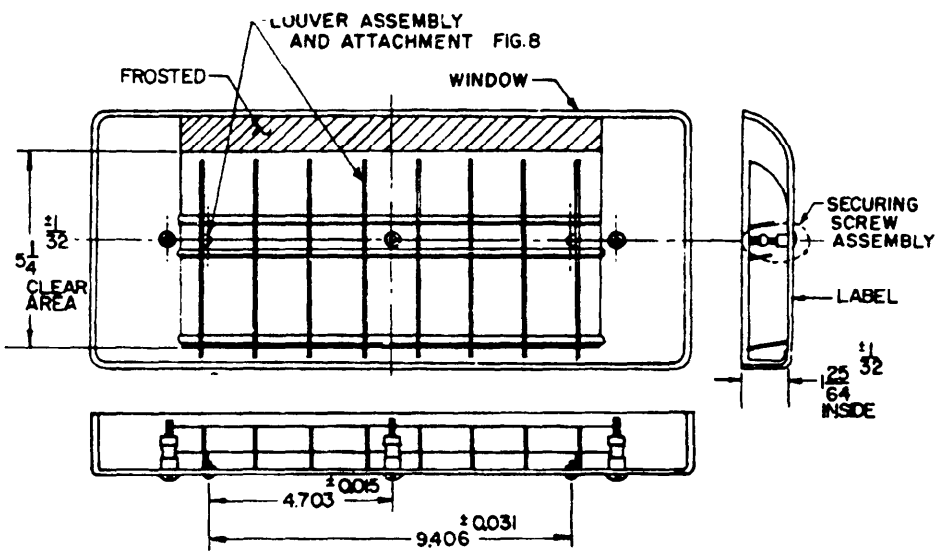


The window assembly shall be as shown herein and in accordance with figure 4 of MIL-F-16377/6, except as follows:

A. Material shall be 1/4 inch thick, clear acrylic plastic, type CLEAR-1 of MIL-P-24191.
B. Three long securing screw assemblies shall be installed.
C. The inside surface of the window, except where indicated as "CLEAR AREA" or "FROSTED" shall be finished white in accordance with 3.8.4.1 of MIL-F-16377. "FROSTED" area shall have a clear frosted finish.
D. The louver assembly shall comply with 3.7.4.2 of MIL-F-16377. It shall be finished white in accordance with 3.8.4.2 of MIL-F-16377.

FIGURE 6. Window assembly, clear white, shielded, directional for Symbols 149.2 and 149.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.

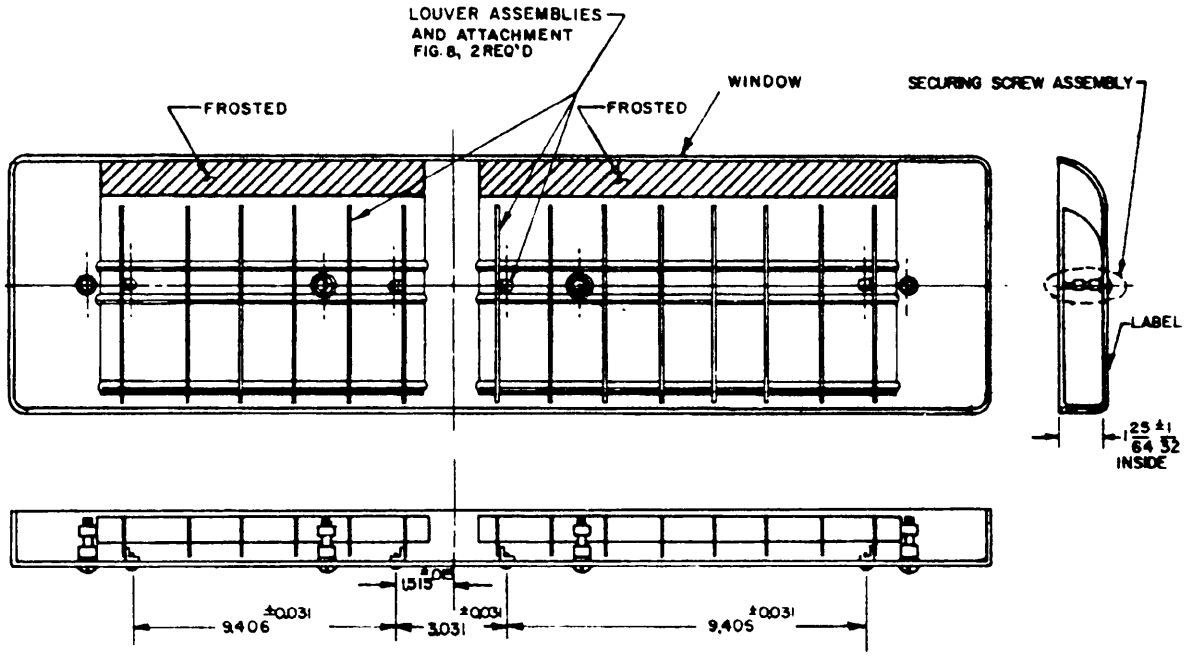

The window assembly shall be as shown herein and in accordance with figure 4 of MIL-F-16377/10 except as follows:

A. Material shall be 1/4 inch thick clear acrylic plastic, type CLEAR-1 of MIL-P-24191.
B. Three long securing screw assemblies shall be installed.
C. The inside surface of the window, except where indicated as "CLEAR AREA" or "FROSTED" shall be finished white in accordance with 3.8.4.1 of MIL-F-16377. "FROSTED" area shall have a clear frosted finish.
D. The louver assembly shall comply with 3.7.4.2 of MIL-F-16377. It shall be finished white in accordance with 3.8.4.2 of MIL-F-16377.

FIGURE 7. Window assembly, clear white, shielded for Symbols 145.2 and 145.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.

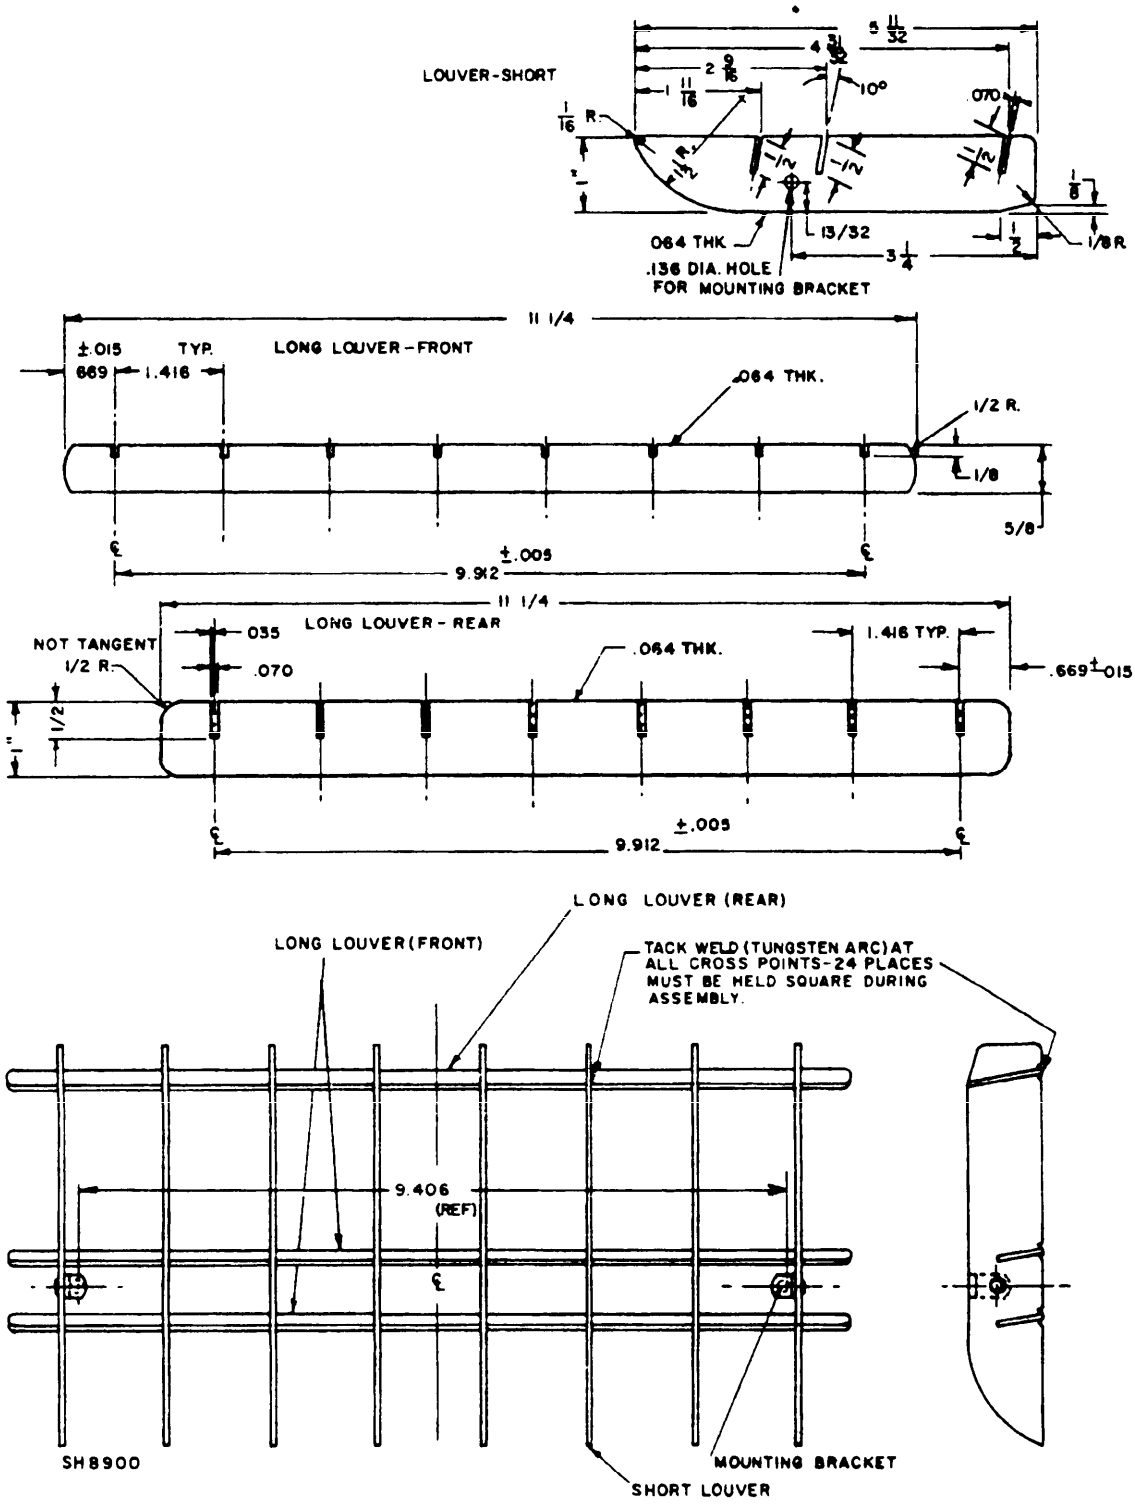


FIGURE 8. Louver assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Type: I
Class: 2
Use: The windows specified herein are for replacement parts only for obsoleted lighting fixtures shown in table II.
Design: See figures 1 through 5.
Label: One type VI label in accordance with 3.7.4.3 of MIL-F-16377 shall be applied on the outside surface near the right hand corner of the window assembly.

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection: see table I.
Quality conformance:
Comparison inspection: same as first article inspection.
Inspection of product for delivery:
Examination: see MIL-F-16377.
Examination for preparation of delivery: see MIL-F-16377.
Quality conformance tests: see MIL-F-16377.

TABLE I. First article and comparison inspection for window assemblies.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Optical uniformity	3.7.4.1.1	4.8.4	
Stress relief	3.8.5.3	4.8.5	

GENERAL INFORMATION: Assignment of Military part numbers and general information is shown in table II.

TABLE II. Part numbers and general information.

Military part no. M16377/67-	Item name	National Stock No. (NSN)	Supersedes part no.	Remarks
001	Window, clear white shielded	6210-00-814-5913	M16377/8-002 MS17307-1	1/ Figure 2
002	Window, clear white shielded	---	M16377/9-002	2/ Figure 3
003	Window, clear white shielded	6210-00-814-8360	M16377/11-002 MS16306-1	3/ Figure 4
004	Window, clear white shielded	6210-00-814-5914	M16377/12-002 MS17305-1	4/ Figure 5
005	Window, clear white shielded directional	6210-00-295-2848	M16377/6-001 MS16891-59	5/ Figure 6
006	Window, clear white shielded directional	6210-00-295-2850	M16377/10-001 MS16891-48	6/ Figure 7

1/ Part number M16377/67-001 is used for replacement windows for obsoleted symbol numbers 347 and 347.1.
2/ Part number M16377/67-002 is used for replacement windows for obsoleted symbol numbers 346 and 346.1
3/ Part number M16377/67-003 is used for replacement windows for obsoleted symbol numbers 344 and 344.1.
4/ Part number M16377/67-004 is used for replacement windows for obsoleted symbol numbers 342 and 342.1.
5/ Part number M16377-67-005 is used for replacement windows for obsoleted symbol numbers 149.2 and 149.3.
6/ Part number M16377-67-006 is used for replacement windows for obsoleted symbol numbers 145.2 and 145.3

Preparing activity:
Navy - SH
(Project 6210-N571)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:53Z
Check the source to verify that this is the current version before use.