FED. SUP CLASS
5305

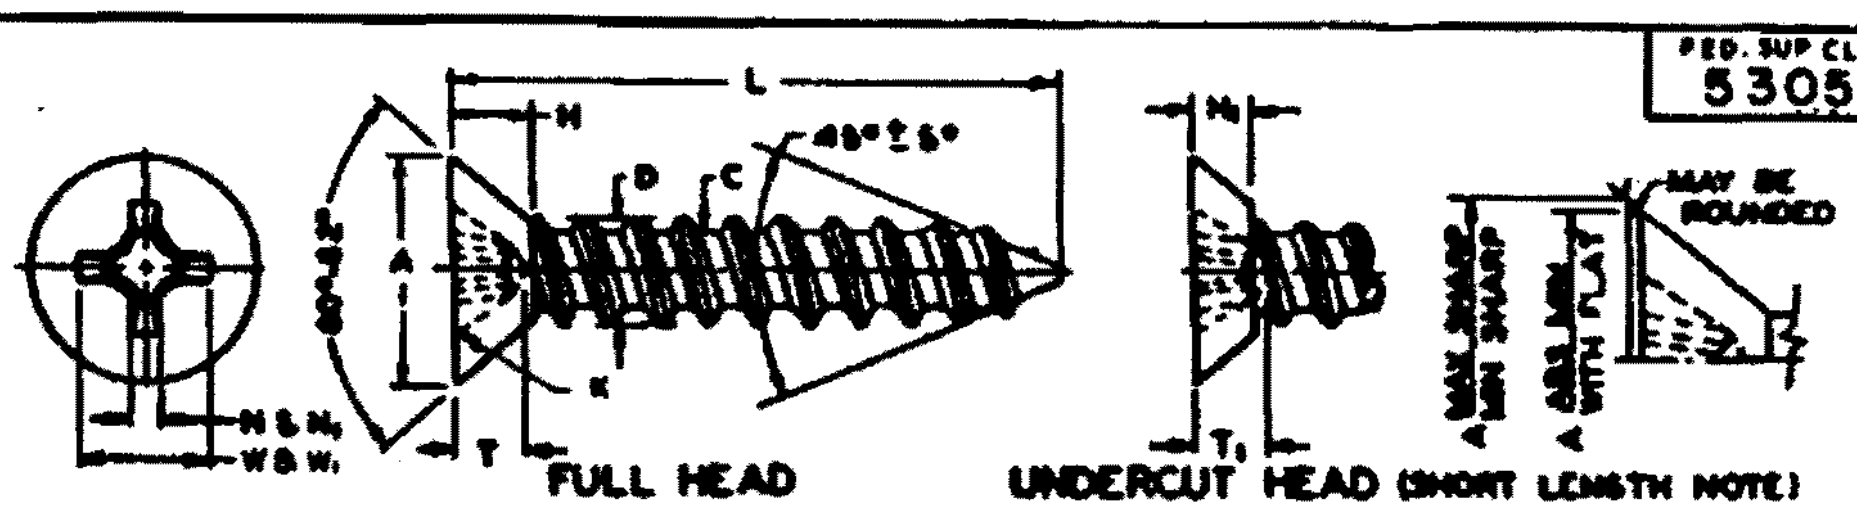

NOMINAL SIZE				4 (.112)	6 (.138)	8 (.164)	10 (.190)	12 (.216)	14 (.242)
THREADS PER INCH				24	18 / 20*	15 / 18*	12 / 16*	11	10
MAJOR DIAMETER		D	MAX MIN	.114 .110	.141 .136	.168 .162	.194 .188	.221 .215	.254 .248
MINOR DIAMETER		C	MAX MIN	.083 .078	.102 .096	.123 .116	.133 .126	.162 .155	.185 .178
HEAD DIAMETER		A	MAX SHARP MIN SHARP ABS MIN	.225 .207 .195	.279 .257 .244	.332 .308 .292	.385 .359 .340	.438 .410 .389	.491 .461 .437
FULL HEAD	HEAD HEIGHT	H	REF	.067	.083	.100	.116	.132	.148
	RECESS DIAMETER	M	MAX MIN	.128 .115	.174 .161	.189 .176	.204 .191	.268 .255	.283 .270
	RECESS DEPTH	T	MAX MIN	.089 .073	.106 .083	.121 .098	.136 .113	.155 .133	.173 .148
	RECESS WIDTH	N	MIN	.019	.029	.031	.032	.035	.036
	DEPTH OF GAGE PENETRATION		MAX MIN	.082 .066	.095 .072	.110 .087	.125 .102	.139 .116	.154 .131
UNDERCUT HEAD	HEAD HEIGHT	H1	MAX MIN	.047 .038	.059 .048	.070 .059	.081 .068	.092 .078	.104 .088
	RECESS DIAMETER	M1	MAX MIN	.116 .103	.149 .136	.174 .161	.189 .176	.233 .220	.250 .237
	RECESS DEPTH	T1	MAX MIN	.078 .062	.078 .055	.106 .083	.121 .098	.121 .101	.136 .116
	RECESS WIDTH	N1	MIN	.018	.025	.029	.031	.030	.032
	DEPTH OF GAGE PENETRATION		MAX MIN	.071 .055	.064 .041	.095 .072	.110 .087	.106 .083	.119 .096
RADIUS		K		.020	.025	.025	.025	.030	.030
DRIVER SIZE				1	2	2	2	3	3

LENGTH L	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/4	± 1/32	1					
5/16			12				
3/8		3	13	24	35		
1/2		4	14	25	36		
5/8		5	15	26	37		
3/4		6	16	27	38	49	60
7/8			17	28	39	50	61
1			18	29	40	51	62
1-1/4	± 1/64			30	41	52	63
1-1/2				31	42	53	64
1-3/4					43		65
2					44		66

MATERIAL: Steel, carbon, in accordance with procurement specification.
FINISH: Cadmium plated in accordance with Federal Specification QQ-P-416, Type II, Class 3.
THREADS: Thread types to be in accordance with applicable requirements of procurement specification.
HEAT TREATMENT: Case hardened or heat treatment to meet performance requirements of procurement specification.
RECESS: Except for dimensions W, T, N, K and Depth of Gage Penetration the recess shall be in accordance with MS 9006.
* SHORT LENGTHS: Lengths above dotted line have fine pitch threads and undercut heads as indicated. (Size 6 undercut head only)
HOLE SIZES: For approximate hole sizes see MS 24631.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number plus the dash number. Example MS 24615-1.
NOTES: (1) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(2) Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓑ CANCELLED, SEE SHEET 2

Ⓑ FOR CHANGES SEE SHEETS 1&2

APPROVED 5 Oct 59
REVISED Ⓐ 25 Feb 1961 Ⓑ 27 AUG 1969

P.A. WC Other Cust SH 82	TITLE SCREW, TAPPING-THREAD FORMING, TYPE A, FLAT 82° COUNTERSUNK HEAD, CROSS RECESSED, STEEL, CARBON, CADMIUM PLATED	MILITARY STANDARD MS 24615
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES MS 24635	SHEET 1 OF 2

DD FORM 672-1