
FED. SUP CLASS
5920

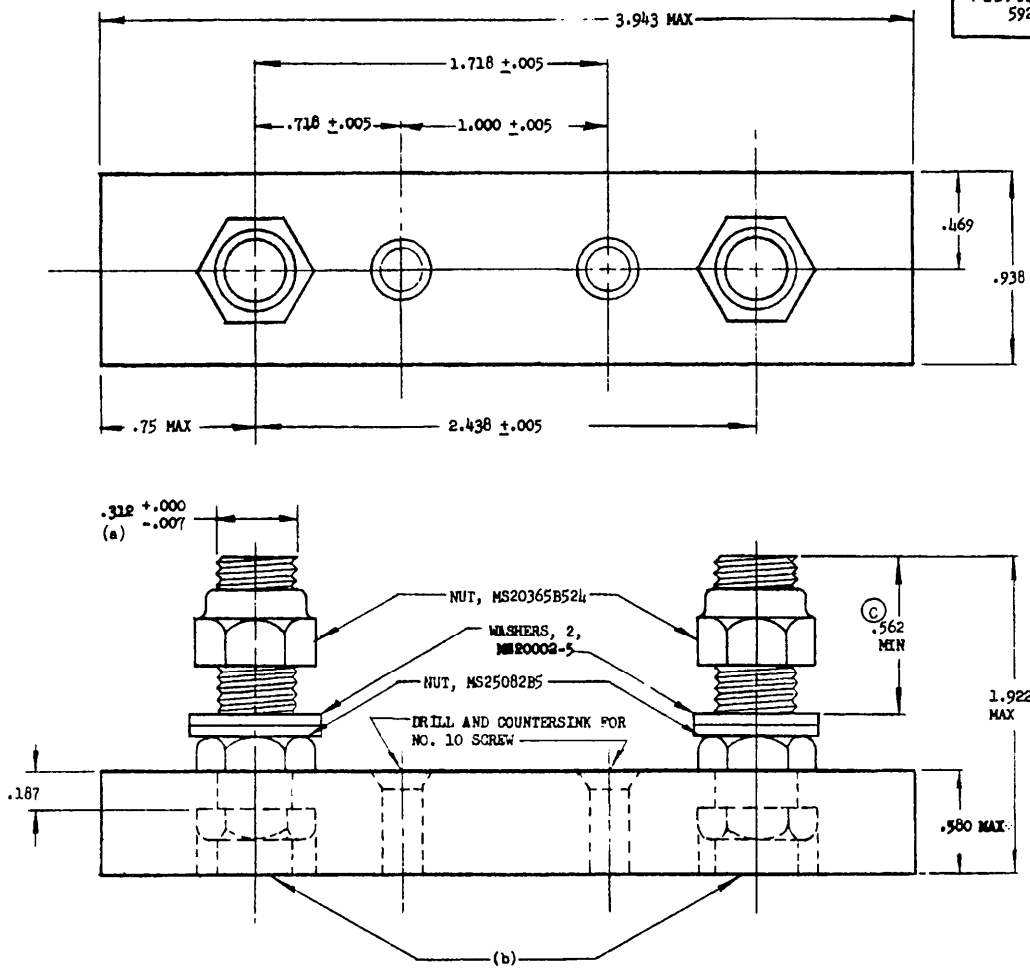

DASH NO.
-1

(a) STUD: THREAD; 5/16-24 UNF-2A.
MATERIAL: STEEL, MIL-S-6050 AS SPECIFIED IN MIL-S-7839.
FINISH: CADMIUM PLATE, QQ-P-416, TYPE II, CLASS 3 OR SILVER PLATE, QQ-S-365.
(b) RECESS CAVITY SHALL TAKE SHAPE OF BOLT HEAD. AFTER INSERTION OF BOLT, CAVITY SHALL BE FILLED WITH AN INSULATING MATERIAL.
CONTOUR OPTIONAL PROVIDED MAXIMUM DIMENSIONS ARE NOT EXCEEDED.
MATERIAL: STUD MOUNTING BASE; MOLDED PLASTIC, MIL-M-14, TYPE MAI-60 OR MBI-30.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031.
MAXIMUM WEIGHT - 0.22 LB.
THIS FUSEHOLDER IS FOR MS28936 FUSES.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - AS Other Cust USAF - 11	TITLE FUSEHOLDER, DC, 500 AMPERE MAXIMUM, BOLT DOWN TYPE, AIRCRAFT	MILITARY STANDARD MS28934(ASG)
PROCUREMENT SPECIFICATION MIL-F-5373	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

*U.S. GOVERNMENT PRINTING OFFICE: 1967-811-814/4040

APPROVED 6 Feb 64 REVISED (A) 7 May 65 (B) 1 Oct 65 (C) 11 Jan 1967

Navy activities: Navy - AS, USAF - 11, 85

User activities: Navy - WP, USAF - 11, 85

This standard has been approved by the DoDISP (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.