
FED. SUP CLASS
6640

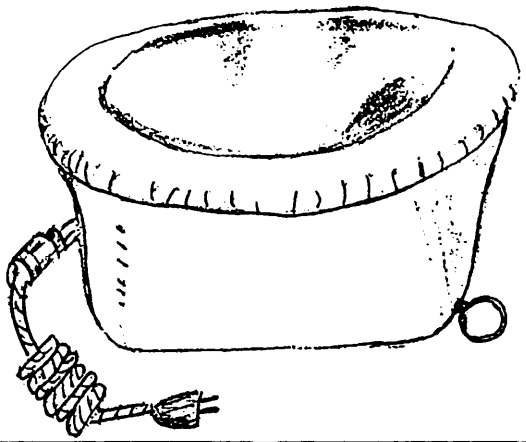

PART NUMBER	FOR FLASK SIZE Milliliters	WATTAGE RANGE
MS36220 -1	50	50 to 65
MS36220 -2	100	75 to 85
MS36220 -3	125	75 to 85
MS36220 -4	200	95 to 105
MS36220 -5	250	135 to 190
MS36220 -6	300	135 to 190
MS36220 -7	500	200 to 280
MS36220 -8	1000	360 to 400
MS36220 -9	2000	445 to 540
MS36220 -10	3000	480 to 575
MS36220 -11	5000	575 to 650

MATERIAL: Exterior cover shall be coated glass cloth. Insulation layer shall be glass fabric or fiber glass. Heating elements shall be resistance wire or heating tapes containing resistance wire. Inner liner shall be glass cloth.

DESIGN: Heating mantle interiors shall be of hemispherical shape. Exterior bottoms may be recessed to provide a stable base. Sizes up to 3000 ml shall be equipped with a thermocouple. The 5000 ml size may be fitted with a thermocouple. The glass fabric temperature limit shall be not less than 450°C (842°F).

All electrical components and insulation shall meet the standards of Underwriters Laboratories, Inc., and shall operate on 110 to 120 volts, 60 Hz, AC.

NOTES: Items differing from this Military Standard by minor variations in design are considered standard under this document, provided such variations do not affect performance and are not in conflict with material requirements as specified herein.

USER ACTIVITIES:
ARMY -
AIR FORCE -

REVIEW ACTIVITIES:

APPROVED 22 JUN 1979 REVISED

This standard has been approved by the Department of the end is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A.	EA	TITLE	MILITARY STANDARD
Other Cust	MS, 99 MB	MANTLE, HEATING, ELECTRIC, RESILIENT GLASS FABRIC, SPHERICAL	MS36220
Procurement Specification None		SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 63 672 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

PROJECT NUMBER 6640-1073

DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:36Z
Check the source to verify that this is the current version before use.