FED. SUP CLASS
5310

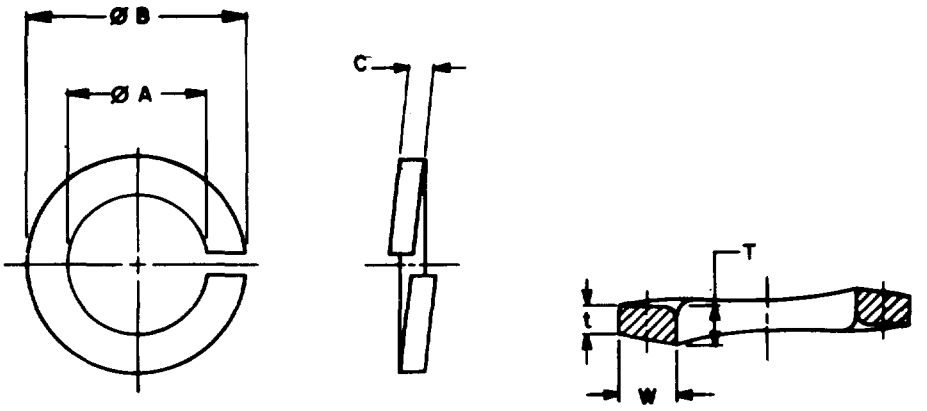


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBERS		NOMINAL SIZE		ØA ID		ØB OD	W SECTION WIDTH	C MEAN SECTION THICKNESS	T + t / 2
HOT DIP ZINC	ELECTROPLATED ZINC			MAX	MIN	MAX	MIN	MAX	MIN
	1	NO. 6	.138	.148	.141	.250	.047	.037	.031
	2	NO. 8	.164	.175	.168	.293	.055	.046	.040
	3	NO. 10	.190	.202	.194	.334	.062	.053	.047
	4	NO. 12	.216	.232	.221	.380	.070	.062	.056
	5	1/4	.250	.263	.255	.489	.109	.072	.062
	6	3/16	.313	.328	.318	.586	.125	.088	.078
	7	3/8	.375	.393	.382	.683	.141	.104	.094
	8	7/16	.438	.459	.446	.779	.156	.119	.109
	24	7/16	.438	.464	.446	.772	.158	.130	.120
	9	1/2	.500	.523	.509	.873	.171	.135	.125
17	16	9/16	.562	.587	.572	.971	.188	.151	.141
18	10	5/8	.625	.653	.636	1.079	.203	.166	.156
19	11	3/4	.750	.783	.763	1.271	.234	.198	.188
20	12	7/8	.875	.912	.890	1.464	.266	.239	.219
21	13	1	1.000	1.042	1.017	1.661	.297	.270	.250
22	14	1-1/8	1.125	1.172	1.144	1.853	.328	.301	.281
23	15	1-1/4	1.250	1.302	1.271	2.045	.359	.332	.312

USER ACTIVITIES:
ARMY-ME
NAVY-MC, YD

REVIEWER ACTIVITIES:
ARMY-AV, EA, GL
DLA-IS
NSA-NS

APPROVED 18 OCT 82 REVISED (B) 20 AUG 87

(B) ENTIRE STANDARD REVISED

P.A. ARMY-AR	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust NAVY-SH		WASHER, LOCK-HELICAL SPRING, REGULAR (MEDIUM) SERIES	MS51415
PROCUREMENT SPECIFICATION FF-W-84	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1510

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:01Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310


REQUIREMENTS:

1. MATERIAL. STEEL, CARBON, 1060 THRU 1080 (UNS G10600 THRU UNS G10800), 45-53 HRC IN ACCORDANCE WITH ASTM A510.

2. FINISH. ELECTROPLATED ZINC COATED WASHERS SHALL BE IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS Fe/Zn 13. HOT DIP ZINC COATED WASHERS SHALL BE IN ACCORDANCE WITH ASTM A153, CLASS C.

3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS SHEET NUMBER PLUS A DASH NUMBER TAKEN FROM TABLE I.

EXAMPLE: MS51415-1



MS51415-1 INDICATES - WASHER, LOCK, HELICAL SPRING (REGULAR), ELECTROPLATED ZINC COATED, ID; .148, OD .250, THICKNESS, .037.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. *REFERENCED GOVERNMENT* (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
4. ELECTROPLATED ZINC COATED WASHERS ARE INTENDED FOR USE IN NON-AEROSPACE, HIGH TEMPERATURE PETROLEUM ENVIRONMENT.

APPROVED 18 OCT 82 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:
ARMY-ME
NAVY-MC,YD

REVIEWER ACTIVITIES:
ARMY-AV,EA,GL
DLA-IS
NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. ARMY-AR Other Cust NAVY-SH	INTERNATIONAL INTEREST	TITLE WASHER, LOCK-HELICAL SPRING, REGULAR (MEDIUM) SERIES	MILITARY STANDARD MS51415
PROCUREMENT SPECIFICATION FF-W-84	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1510

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:01Z
Check the source to verify that this is the current version before use.