
FED. SUP CLASS
2330

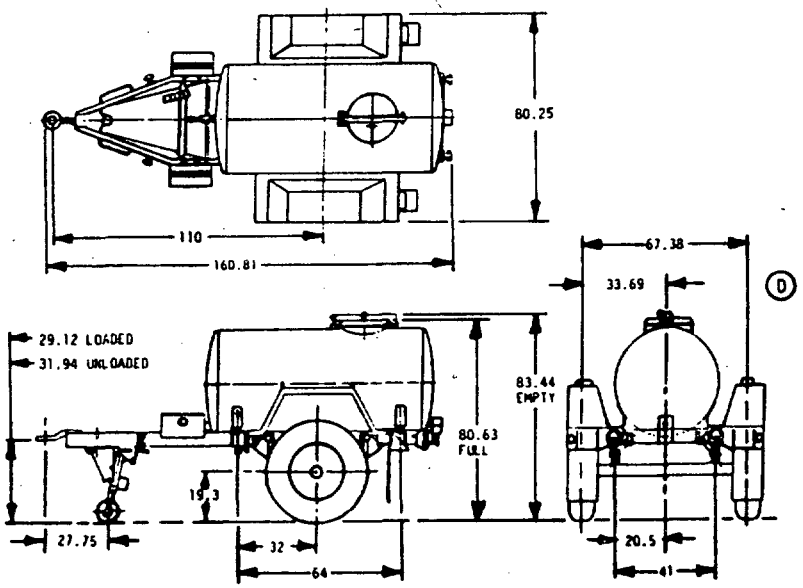

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, CARGO, 2-1/2 TON, 6x6

BASIC CHASSIS: M 492A1 8736829

CURB WEIGHT: FULLY EQUIPPED 2730 LBS.

PAYLOAD: LOADED 3332 LBS.

WEIGHT DISTRIBUTION:

	EMPTY	LOADED
LANDING GEAR	345 LBS.	345 LBS.
AXLE	2385 LBS.	5717 LBS.
TOTAL	2730 LBS.	6062 LBS.

GROSS WEIGHT: 6062 LBS.

FORDING DEPTH: 30 IN.

GENERAL: TRAILER, TANK, WATER, 400 GALLON, 2 WHEEL, M149A2 TRANSPORTS POTABLE WATER ON HIGHWAY AND CROSS COUNTRY TERRAIN. THE WATER TANK HAS STAINLESS STEEL, DOUBLE WALL CONSTRUCTION USING 2 INCHES OF URETHANE FOAM INSULATION. IT IS EQUIPPED WITH DISPENSING EQUIPMENT CONSISTING OF 4 BRONZE FAUCETS, A REAR SELF-DRAIN FAUCET, AND BRASS PIPING. A SHUT-OFF VALVE IS PROVIDED TO COMPLETE DRAINAGE FROM THE EXTERIOR PLUMBING. THE TRAILER IS ALSO EQUIPPED WITH A BRACKET TO ALLOW HEATING WITH THE STANDARD M67 IMMERSION HEATER.

TANK ASSEMBLY:
400 GALLON WATER 12269886
MOUNT; RUBBER, FOUR 8331543
PIPING ASSEMBLY 7061056

CHASSIS COMPONENTS:
BOX ASSY LH 7035486, RH 7035487
LUNETTE MS51339-2 7354577
CHAIN ASSY; SAFETY 12314119-1
FRAME ASSY; CHASSIS 11625110
MUD FLAPS 11597666-1
RETAINER; MUD FLAPS 11597745
FENDER ASSY; R AND L 7055109
FENDER SUPPORT; FRONT R 7035152, L 7035153
FENDER SUPPORT; REAR R 11597732-1, L 11597732
FENDER BRACKET; FRONT, TWO 7059236
FENDER BRACKET; REAR, TWO 7059230
TANK ASSEMBLY; AIR 11625104
AXLE REF 8719916 7059199
WHEEL BEARINGS; OUTER, INNER MS19081-112
CYLINDER AND CHAMBER ASSY 7411020
RELAY VALVE MS53004-1

ELECTRICAL: INSTL 11597755
POTENTIAL; 24 V
TAILLIGHT; COMPOSITE, TWO 11614157

REFLECTORS: RED, FOUR MS35387-1
AMBER, TWO MS35387-2

SUSPENSION: MS35865-A6 INSTL 10929851
SPRINGS 8389626
TORQUE ROD; SOLID 11625147
TORQUE ROD; ADJUSTABLE 7366478-1
SHOCK ABSORBERS 8716992

WHEELS: SIZE; 7.5 x 20 7389621
RING, WHEEL 7389061

TIRES: 900x20, 8-PLY RATING MIL-T-12459 (D)
TUBES ZZ-I-550
TREAD DESIGN, NDCC
RECOMMENDED PRESSURE WITH MAXIMUM LOAD 50 PSIG

BRAKES: SERVICE INSTL 11625106
ACTUATION; AIR/HYDRAULIC
BRAKE ASSY; 15 x 3, LH 8336701, RH 8336702

BRAKES: PARKING INSTL 10929853

MAXIMUM TOWING SPEED:
CROSS COUNTRY 30 MPH
HIGHWAY 50 MPH

TIE DOWNS: EQUIPPED WITH MIL-STD-209 LIFT/TIE DOWN FITTINGS, ONE EACH SIDE, TWO REAR

LANDING GEAR: 12259830
LUNETTE HEIGHT, RETRACTED 25.38 IN.
LUNETTE HEIGHT, EXTENDED 34.38 IN.

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICHIGAN, 48090.

(D) DENOTES CHANGE

MS PART NO.	ENGINEERING DRAWING NO.
MS52108-1	8750052

P. A.	INTERNATIONAL INTEREST	TITLE
ARMY-AT Other Cust		TRAILER, TANK: POTABLE WATER, 1-1/2 TON, 2 WHEEL, MILITARY DESIGN, M 149A2

PROCUREMENT SPECIFICATION	SUPERSEDES:
MIL-T-45316	

MILITARY STANDARD
MS52108(AT)
SHEET 1 OF 1

APPROVED 16 SEP 69 REVISED (B) 15 JAN 85 (C) 12 SEPT 85 (D) 16 FEBRUARY 88

DD FORM 672-1 MAY 73 LIMITED COORDINATION
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
2330-0977

USER ACTIVITIES.
REVIEWER ACTIVITIES

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.