This standard has been approved by the ELECTRONICS COMMAND DEPARTMENT of the ARMY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

ENTIRE STANDARD REVISED

CANCELLED 29 JUN 1972

USE MIL-B-55118 |—(EL) SPEC.

SHEETS AS FOLLOWS:

BB-418/U: MIL-B-55118/1(EL)

BB-431/U: MIL-B-55118/2(EL)

BB-436/U: MIL-B-55118/3(EL)

BB-437/U: MIL-B-55118/4(EL)

BB-438/U: MIL-B-55118/5(EL)

BB-613/U: MIL-B-55118/6(EL)

BB-616/U: MIL-B-55118/7(EL)

Battery, Storage	BB-418/U	BB-431/U	BB-436/U	BB-437/U	BB-438/U	BB-613/U	BB-616/U
Type	I	II	I	I	I	I	I
Dimensions							
A	5.670 ([illegible].02)	[illegible]950 (176.53)	[illegible] (98.43)	4.260 (108.20)	7.470 (189.74)	5.660 (143.76)	2.900 (73.66)
[illegible]	[illegible]310 (58.67)	[illegible] (6[illegible])	2.100 (53.34)	2.[illegible] (58.67)	2.310 (58.67)	2.310 (58.67)	2.310 (58.67)
[illegible]	1.[illegible] (2[illegible].92)	1.0[illegible] (27.[illegible])	0.8[illegible] ([illegible].34)	1.[illegible] ([illegible].92)	1.060 (26.92)	1.060 (26.92)	1.060 (26.92)
D	5.[illegible] (131.[illegible])	6.2[illegible] ([illegible].51)	[illegible]360 ([illegible].34)	3.7[illegible] ([illegible]7)	7.000 (177.8)	5.190 (131.83)	2.430 (61.72)
E	[illegible]500 (38.10)	1.625 ([illegible].28)	[illegible] ([illegible])	1.500 (38.10)	1.500 (38.10)	1.500 (38.10)	1.500 (38.10)
[illegible]	[illegible] ([illegible])	0.397 (10.08)	[illegible] (9.[illegible])	0.405 ([illegible]0.29)	0.405 (10.29)	0.405 (10.29)	0.405 (10.29)
[illegible]	0.530 (13.[illegible])	0.5[illegible] (13.72)	0.[illegible] ([illegible].67)	0.530 (13.[illegible])	0.530 (13.46)	0.530 (13.46)	0.530 (13.46)
H	[illegible]5.360 ([illegible])	[illegible]6.875 ([illegible].63)	[illegible].540 (89.92)	[illegible].010 (101.[illegible])	7.220 (183.39)	5.410 (137.41)	2.650 (67.31)
Slotted Hex Head Screw MS Part No.	[illegible]75[illegible]	N/A	(See [illegible]-B-39[illegible])	750[illegible]-2	7504[illegible]	75043-2	75043-2
Belleville Spring MS Part No.	[illegible]044-2	N/A	(See [illegible]-39810)	75[illegible]-2	75044-[illegible]	75044-2	75044-2
Washer MS Part No.	[illegible]5-2	N/A	(See SM[illegible]8163)	750[illegible]-2	[illegible]045-2	75045-2	75045-2

Tolerances: BB-418/U, BB-431/U, BB-436/U
A, D [illegible] H = [illegible]5 - [illegible]5 (+.13 [illegible].64)
Exce[illegible]-(BB[illegible]8/U) [illegible].50 (±[illegible])
B, C, [illegible] F and G = ±.015 (±.38)

Tolerances: BB-437/U, BB-438/U, BB-613/U, BB-616/U
[illegible] +.020 -.010 (+.51 -.25)
[illegible] C, [illegible] F, G and H = ±.015 (±.38)
D = ±.020 (±.51)

NOTES

1. All dimensions are in inches. Tolerances are as specified.
2. Metric equivalents [illegible] in parentheses are for general information only and are based upon 1 inch = 25.4 millimeters.
3. Dimension "H" is the [illegible] height to the top of the terminal excluding hardware as specified.
4. The head space above the plates shall be no less than 20% of the internal cell height.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.

APPROVED 5 MARCH 1962 REVISED Ⓐ 2 APRIL 1962 Ⓑ 2 APRIL 1964 Ⓒ 29 JUN 1970 Ⓓ 29 JUN 1972

FED. SUP CLASS
6140

P.A. ARMY EL
Other Cust
NONE

TITLE
BATTERY OUTLINE DIMENSIONS

MILITARY STANDARD
MS 75042 (EL)

PROCUREMENT SPECIFICATION
MIL-B-55118 (EL)

SUPERSEDES:

SHEET 1 OF 2

FED. SUP CLASS
6140

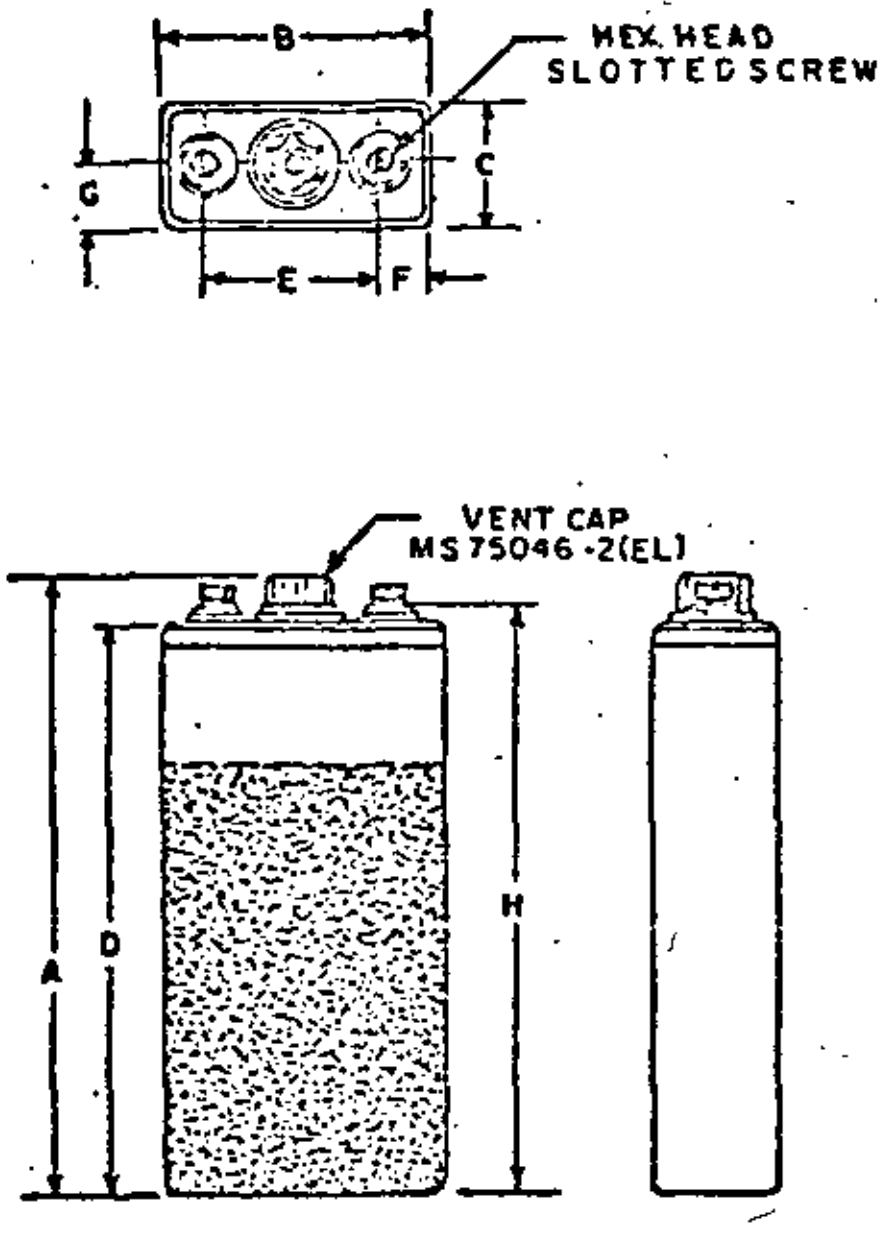

TYPE I

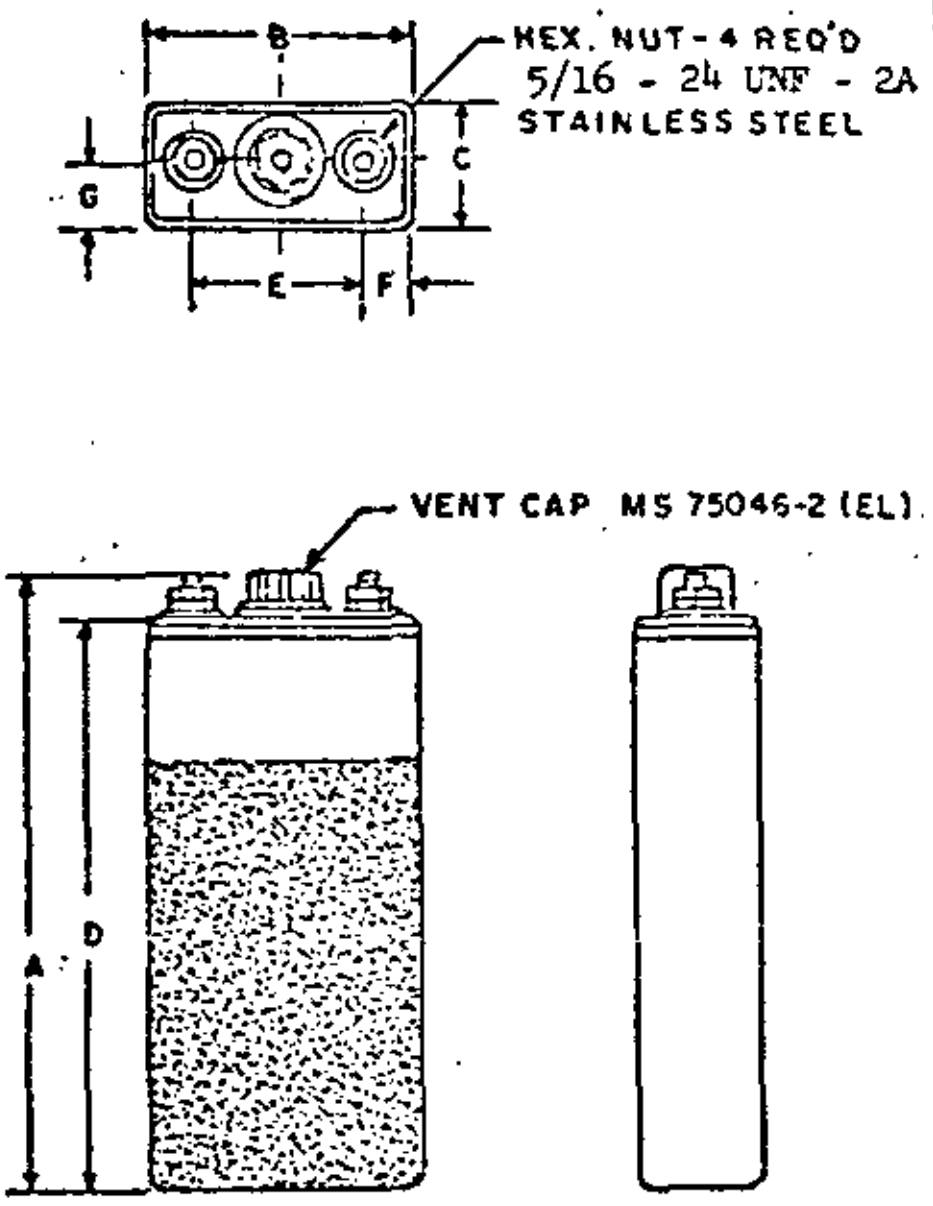

TYPE II

(D) 29 JUN 1972

REVISED

APPROVED

This standard has been approved by the ELECTRONICS COMMAND Department of the ARMY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. EL Other Cust	TITLE BATTERY OUTLINE DIMENSIONS	MILITARY STANDARD MS 75042 (EL)
Procurement Specification MIL-B-55118 (EL)	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 61 672 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED.

DATE

DRAWN BY ______________ ______

TYPED BY ______________ ______

CHECKED BY ______________ ______

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32 x 9-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8 x 10½ SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8 x 10½ SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8 x 10½ SHEET.

☆U.S. GOVERNMENT PRINTING OFFICE:1972-714-537/1143

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.