


FED SUP CLASS
5950

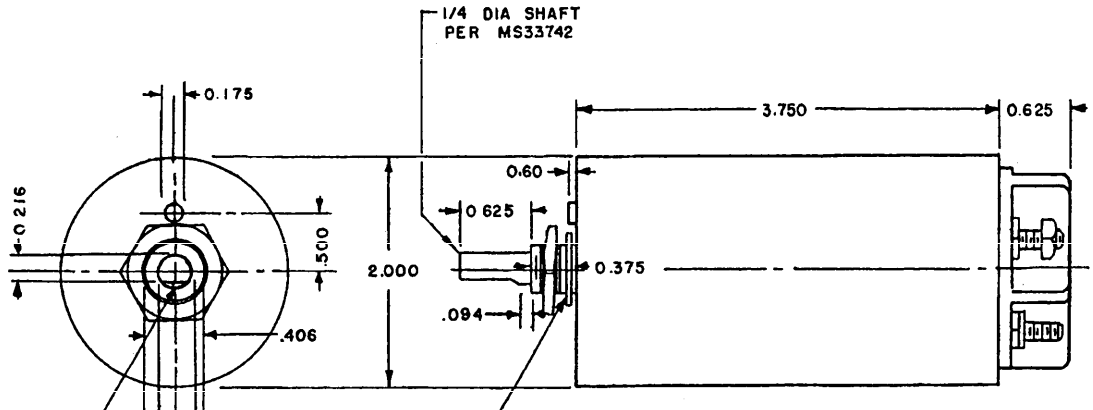

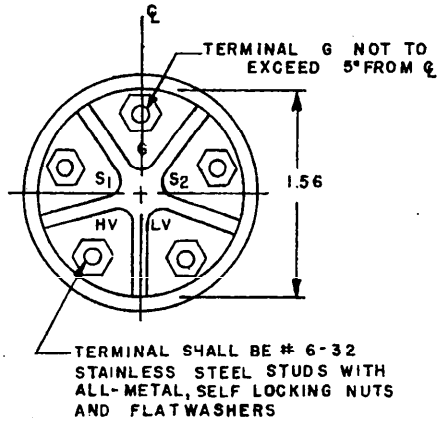

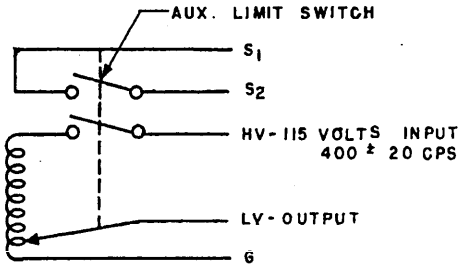

DASH NO	INPUT		OUTPUT		MAX.
	VOLTAGE	FREQ	NOMINAL VOLTAGE	MAX AMPS	WEIGHT OZS
-1	115	400±20	0-5.4	12.0	16.0
-2	115	400±20	0-28	5.0	16.0

THE PRIMARY WINDING SHALL BE EXTERNALLY FUSED FOR THE APPLICABLE RATING.

CLOCKWISE SHAFT ROTATION SHALL INCREASE OUTPUT VOLTAGE.
THE ON/OFF SWITCH SHALL CUT OFF ALL POWER TO THE UNIT AT CCW END OF SHAFT ROTATION.
THE AUXILIARY LIMIT SWITCH SHALL BE ACTUATED WITHIN THE FIRST 20° OF ROTATION FROM THE CCW END OF ROTATION, AND SHALL REMAIN ACTUATED THROUGHOUT THE ENTIRE RANGE OF OUTPUT.
DIMENSIONS IN INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED ± 0.010.
THE TRANSFORMER NEED NOT HAVE THE SHAPE SHOWN, BUT SHALL BE WITHIN THE OUTLINE SHOWN.

FOR DESIGN PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 30 Oct 64 REVISED

P.A. USAF-11 Other Cust Navy-WP	TITLE TRANSFORMER, VARIABLE, AIRCRAFT LIGHTING	MILITARY STANDARD MS 90309 (ASG)
PROCUREMENT SPECIFICATION MIL-T-27493	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Review activities: USAF - 11
Navy - WP

This standard has been approved for use by the Department of the Air Force (11) and Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 20260-23T20:34Z
Check the source to verify that this is the current version before use.