FED. SUP CLASS
9520

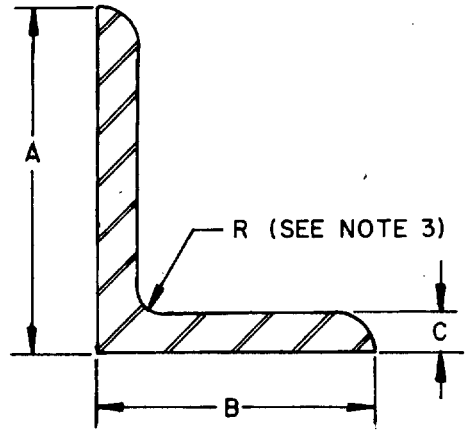



TABLE I. DASH NUMBERS.

| DASH NO | INDUSTRY DESIGNATOR | LENGTH OF VERT A | LENGTH OF HORIZ B | THKNS C |
|---|---|---|---|---|
| 001 | L2 x 1-1/2 x 1/8 | 2.000 | 1.500 | .125 |
| 003 | L2 x 1-1/2 x 3/16 | 2.000 | 1.500 | .188 |
| 005 | L2-1/2 x 1-1/2 x 1/4 | 2.500 | 1.500 | .250 |
| 007 | L3 x 2 x 1/4 | 3.000 | 2.000 | .250 |
| 009 | L3 x 2-1/2 x 1/4 | 3.000 | 2.500 | .250 |
| 011 | L3 x 2-1/2 x 3/8 | 3.000 | 2.500 | .375 |
| 013 | L3-1/2 x 2-1/2 x 5/16 | 3.500 | 2.500 | .313 |

USER ACTIVITIES:
NAVY-AS

REVIEWER ACTIVITIES:
ARMY-AT, MI
AIR FORCE-84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 29 JAN 85 REVISED

| P.A. YD / Other Cust MR 99 | INTERNATIONAL INTEREST | TITLE "L" SHAPES (ANGLES), UNEQUAL LEGS, STRUCTURAL STEEL, CARBON, MEDIUM | MILITARY STANDARD MS90507 |
|---|---|---|---|
| PROCUREMENT SPECIFICATION ASTM A36 | SUPERSEDES: | | PAGE 1 OF 2 |

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9520-0074

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL. STEEL, CARBON, MEDIUM, AS SPECIFIED IN PROCUREMENT DOCUMENT.

2. FORMING PROCESS. "L" SHAPES (ANGLES), UNEQUAL LEGS, STRUCTURAL, STEEL, CARBON, MEDIUM, SHALL BE HOT ROLLED.

3. FINISH. AS SPECIFIED IN PROCUREMENT DOCUMENT.

4. HEAT TREATMENT. AS FABRICATED.

5. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER PLUS A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS90507-003
   - DASH NUMBER
   - BASIC MS NUMBER

   MS90507-003 INDICATES - "L" SHAPES (ANGLES), UNEQUAL LEGS, STRUCTURAL, STEEL, CARBON, MEDIUM; INDUSTRY DESIGNATOR L2 x 1-1/2 x 3/16

6. MARKING. IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. STANDARD LENGTH OF "L" SHAPES IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. RADII OF FILLETS AND TOES OF SHAPE PROFILES VARY WITH INDIVIDUAL MANUFACTURERS AND THEREFORE ARE NOT SPECIFIED.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
5. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 29 JAN 85
REVISED

USER ACTIVITIES:
NAVY-AS

REVIEWER ACTIVITIES:
ARMY-AT, MI
AIR FORCE-84
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A. | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Other Cust YD MR 99 | | "L" SHAPES (ANGLES), UNEQUAL LEGS, STRUCTURAL STEEL, CARBON, MEDIUM | MS90507 |
| PROCUREMENT SPECIFICATION: ASTM A36 | SUPERSEDES: | | PAGE 2 OF 2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.