
NOTICE—When Government drawings specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture use, or sell any patented invention that may in any way be related thereto

This standard has been approved by the Department of the and is mandatory for use by that activity All other military activities are required to employ this standard where suitable

# MS9444 (ASG)

FED SUP CLASS 5306

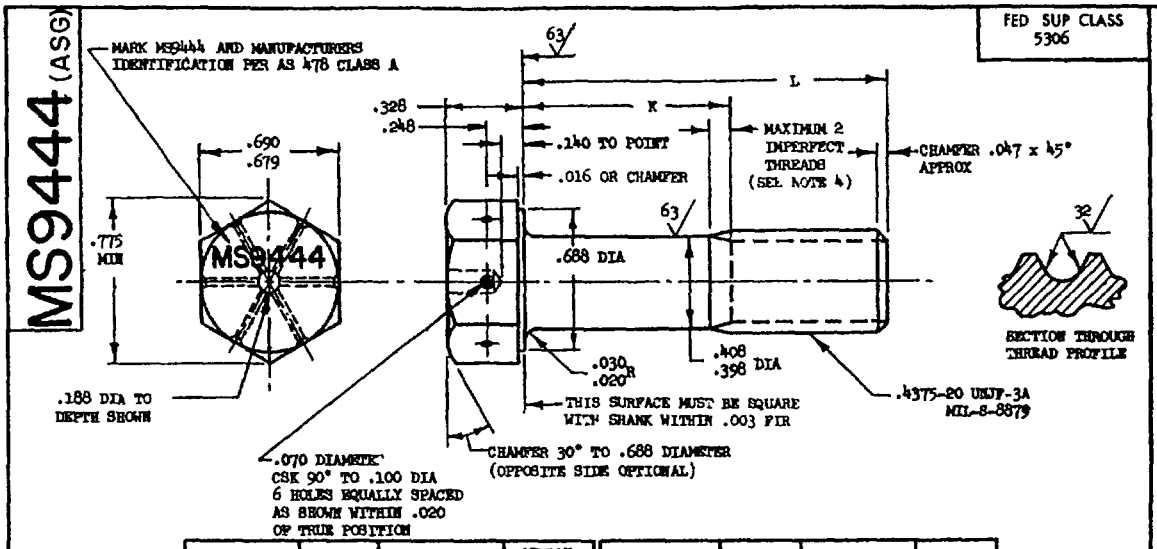


| PART NUMBER | L | K | APPROX WEIGHT LB/100 |
|---|---|---|---|
| MS9444-04 | .688 | .105- .125 | 6.43 |
| MS9444-05 | .750 | .105- .125 | 6.69 |
| MS9444-06 | .812 | .105- .125 | 6.91 |
| MS9444-07 | .875 | .105- .125 | 7.14 |
| MS9444-08 | .938 | .105- .125 | 7.37 |
| MS9444-09 | 1.000 | .105- .125 | 7.60 |
| MS9444-10 | 1.062 | .105- .125 | 7.82 |
| MS9444-11 | 1.125 | .105- .125 | 8.05 |
| MS9444-12 | 1.188 | .105- .125 | 8.28 |
| MS9444-13 | 1.250 | .125- .145 | 8.50 |
| MS9444-14 | 1.312 | .128- .188 | 8.73 |
| MS9444-15 | 1.375 | .190- .250 | 8.96 |
| MS9444-16 | 1.438 | .252- .312 | 9.19 |
| MS9444-17 | 1.500 | .315- .375 | 9.41 |
| MS9444-18 | 1.562 | .378- .438 | 9.64 |
| MS9444-19 | 1.625 | .440- .500 | 9.87 |
| MS9444-20 | 1.688 | .502- .562 | 10.10 |
| MS9444-21 | 1.750 | .565- .625 | 10.24 |
| MS9444-22 | 1.875 | .690- .750 | 10.70 |
| MS9444-23 | 2.000 | .815- .875 | 11.23 |
| MS9444-24 | 2.125 | .940-1.000 | 11.69 |
| MS9444-25 | 2.250 | 1.065-1.125 | 12.14 |
| MS9444-26 | 2.375 | 1.190-1.250 | 12.60 |
| MS9444-27 | 2.500 | 1.315-1.375 | 13.05 |
| MS9444-28 | 2.625 | 1.440-1.500 | 13.51 |
| MS9444-29 | 2.750 | 1.565-1.625 | 13.96 |
| MS9444-30 | 2.875 | 1.690-1.750 | 14.42 |
| MS9444-31 | 3.000 | 1.815-1.875 | 14.87 |
| MS9444-32 | 3.125 | 1.940-2.000 | 15.33 |
| MS9444-33 | 3.250 | 2.065-2.125 | 15.78 |
| MS9444-34 | 3.375 | 2.190-2.250 | 16.24 |
| MS9444-35 | 3.500 | 2.315-2.375 | 16.69 |
| MS9444-36 | 3.625 | 2.440-2.500 | 17.15 |
| MS9444-37 | 3.750 | 2.565-2.625 | 17.60 |
| MS9444-38 | 3.875 | 2.690-2.750 | 18.05 |
| MS9444-39 | 4.000 | 2.815-2.875 | 18.51 |
| MS9444-40 | 4.125 | 2.940-3.000 | 18.96 |
| MS9444-41 | 4.250 | 3.065-3.125 | 19.42 |
| MS9444-42 | 4.375 | 3.190-3.250 | 19.87 |
| MS9444-43 | 4.500 | 3.315-3.375 | 20.33 |
| MS9444-44 | 4.625 | 3.440-3.500 | 20.78 |
| MS9444-45 | 4.750 | 3.565-3.625 | 21.24 |
| MS9444-46 | 4.875 | 3.690-3.750 | 21.69 |
| MS9444-47 | 5.000 | 3.815-3.875 | 22.15 |
| MS9444-48 | 5.125 | 3.940-4.000 | 22.60 |
| MS9444-49 | 5.250 | 4.065-4.125 | 23.06 |
| MS9444-50 | 5.375 | 4.190-4.250 | 23 51 |
| MS9444-51 | 5.500 | 4.315-4.375 | 23.97 |
| MS9444-52 | 5.625 | 4.440-4.500 | 24.42 |
| MS9444-53 | 5.750 | 4.565-4.625 | 24.88 |
| MS9444-54 | 5.875 | 4.690-4.750 | 25.33 |
| MS9444-55 | 6.000 | 4.815-4.875 | 25.79 |

1 SHANK SHALL BE STRAIGHT WITHIN .0025 FIR PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .019 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET AREA.
5 MATERIAL STEEL AMS 6304.
6 HARDNESS ROCKWELL C42-46
7 FINISH DIFFUSED NICKEL-CADMIUM PLATE AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING CONTACT POINTS PERMISSIBLE PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING
8 MANUFACTURING SPECIFICATION. AMS 7455. PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING
9. SURFACE ROUGHNESS. AS 291, UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEXAGON
10 BREAK SHARP EDGES .003 - 015 UNLESS OTHERWISE SPECIFIED
11 DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED- TOLERANCES; LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°
12. TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITION.
13 DO NOT USE UNASSIGNED PART NUMBERS

AS & AMS ARE SAE PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 21 DEC 62 REVISED

| | | |
|---|---|---|
| P.A USAF - AFSC<br>Other Cust NAVY - WEP | TITLE BOLT, MACHINE - STEEL AMS 6304, DIFFUSED NICKEL-CADMIUM PLATED, HEXAGON HEAD, DRILLED, .4375-20 UNJF-3A | MILITARY STANDARD<br>MS9444 (ASG) |
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES | SHEET 1 OF 1 |

DD FORM 1 MAY 51 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:17Z
Check the source to verify that this is the current version before use.