
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS 5307

This document has been promulgated by the Department of Defense as the Military standard to limit the selection of the item, product, or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

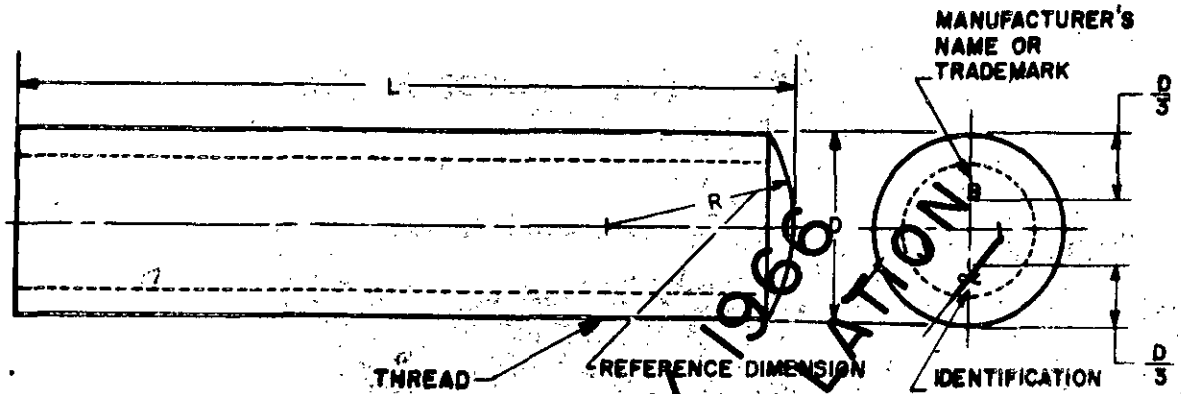

B CANCELED 25 JANUARY 1966 USE MS 16187 — THIS CANCELLATION APPLIES TO ALL PAGES OF THIS STANDARD.

Nominal Size (D)	7/16			1/2	
Threads per inch	14UNC-2A			13UNC-2A	
Radius (R) REF.	0.4375			0.5000	
Length L	Tolerance	Dash No.	FIIN	Dash No.	FIIN
1.50		1		27	
2.00		2		28	
2.125		3		29	
2.250		4		30	
2.375		5		31	
2.500		6		32	
2.625		7		33	
2.750		8		34	
2.875	±1/16	9		35	
3.000	-1/16	10		36	
3.250		11		37	
3.500		12		38	
3.750		13		39	
4.000		14		40	
4.250		15		41	
4.500		16		42	
4.750		17		43	
5.000		18		44	
5.500		19		45	
6.000		20		46	
6.500		21		47	
7.000		22		48	
7.500		23		49	
8.000		24		50	
8.500		25		51	
9.000		26		52	

PROJECT 5307-0040

APPROVED 6 JUL 1956 REVISED (A) 28 FEB 1957 (B) 25 JANUARY 1966

CUSTODIANS: Navy - Ships
OTHER INT.: A - CEQSig, N - MCOrY
Procurement Specification: MIL-S-1252

MILITARY STANDARD

STUDS (BOLT-STUDS), CONTINUOUS THREAD, B7A AND B14 ALLOY STEEL, HIGH TEMPERATURE SERVICE, 875° F. MAXIMUM

(A)

MS15824

SHEET 1 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:51Z
Check the source to verify that this is the current version before use.