

FED. SUP CLASS
6125

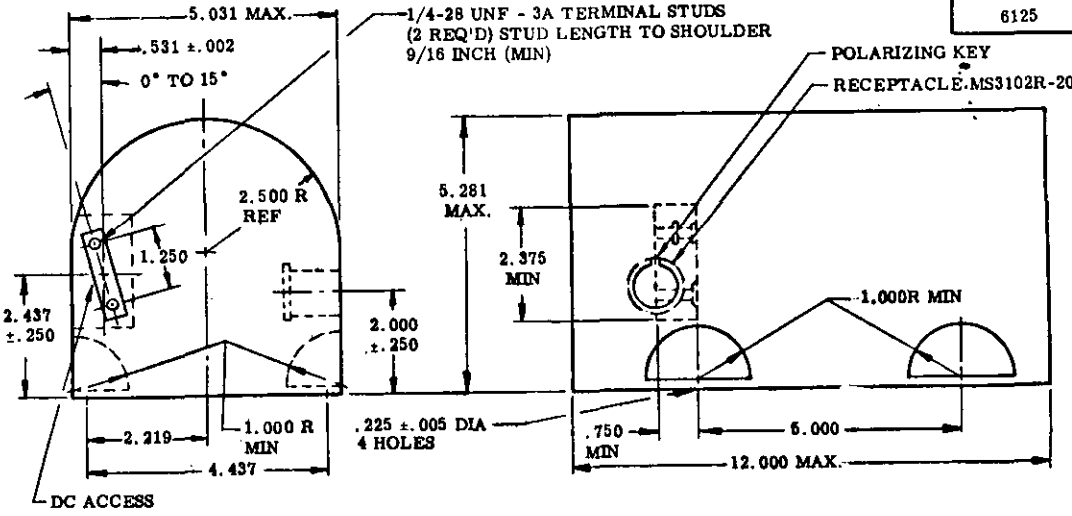

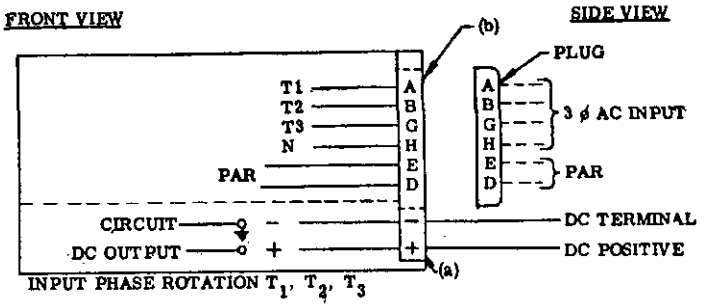

DASH NO.
-1

FOR ANY COMBINATION OF CONDITIONS LISTED BELOW
THE OUTPUT VOLTAGE SHALL REMAIN WITHIN THE INDICATED LIMITS

CONDITIONS	OUTPUT VOLTAGE LIMITS
INPUT VOLTAGE (LINE TO NEUTRAL) VARIED BETWEEN 112.5/195 AND 117.5/204 AND FREQUENCY VARIED 380-420. LOAD VARIED FROM 0 TO FULL LOAD. AMBIENT TEMPERATURE - ALTITUDE VARIED WITHIN THE RANGE ESTABLISHED BY CURVE I OF MS33543(ASG) EXCEPT THAT THE AMBIENT TEMPERATURE FOR THIS UNIT SHALL NEVER EXCEED 85°C. THE UNIT SHALL DELIVER NO LESS THAN A PROPORTIONAL DECREASE FROM RATED OUTPUT AT 50,000 FT TO 50% RATED OUTPUT AT 65,000 FT. MOUNTED BASE DOWN AND MANEUVERED THROUGH ANY POSITION. WARM UP EFFECTS.	ADJUSTABLE FROM 27.5 TO 28.5 VOLTS REGULATION ±.5 VOLT FROM ADJUSTED VOLTAGE

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.
A MEANS OF ADJUSTING OUTPUT VOLTAGE SHALL BE PROVIDED ON THE CONNECTOR END OF THE UNIT AND ABOVE ITS HORIZONTAL CENTER LINE.
THE WEIGHT AND VOLUME LIMITATIONS SHOWN ON THIS DRAWING SHALL INCLUDE THE WEIGHT AND VOLUME OF ALL AUXILIARY APPARATUS NECESSARY TO MAKE THIS UNIT CONFORM TO THE PROCUREMENT SPECIFICATION.
EFFICIENCY: AT SEA LEVEL, 25 + 15°C, FULL LOAD (%): 75.
WEIGHT: 16 LBS.

CANCELLED AFTER 16 SEPT 1977 SUPERSEDED BY

(F) DOD-C-7115/1

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(F) DENOTES CHANGES

APPROVED 15 MAR 55 — REVISED (A) 15 MAR 1955 (B) 25 FEB 1957 (C) 26 SEPT 1957 (D) 25 SEPT 1962 (E) 20 MARCH 1968 (F) 16 SEPT 77

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft simulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - ME	TITLE: CONVERTER, 100 AMPERE, AIRCRAFT, CLASS B, REGULATED, FAN COOLED	MILITARY STANDARD MS16064
PROCUREMENT SPECIFICATION MIL-C-7115	SUPERSEDES: BUAER DWGS 51A1A44 AND 51A1A45	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1977—703-122/6761

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:52Z
Check the source to verify that this is the current version before use.