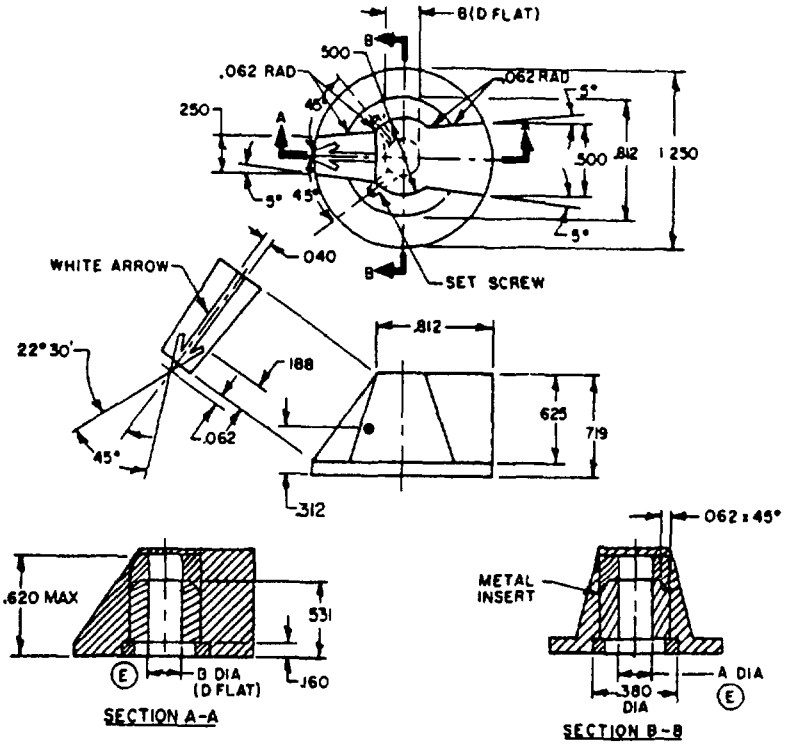


INCHES	MM
001	0.03
.016	0.41
.040	1.02
.062	1.57
.107	2.72
.125	3.18
.127	3.23
160	4.06
.164	4.17
.188	4.78
.223	5 56
.250	6.35
.253	6.43
.312	7.92
.380	9 65
500	12.70
.531	13.49
620	15.75
.625	15.88
.719	18.26
.812	20.62
1.250	31.75

(E)

MIL-PART NUMBER	B ±.001	A ±.001	SHAFT SIZE	COLOR
MS25165-1	.223	.253	.250	Gray
-2	.107	.127	.125	Gray
-3	.223	.253	.250	Black
-4	.107	127	.125	Black

NOTES

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ± 016 (.41 mm), angles ±2° 0'
3. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein
5. Referenced documents shall be of the issue in effect on date of invitations for bid
6. Material
   Knob, transparent thermoplastic
   Insert, brass per QQ-B-626
   Setscrew, cres per MIL-S-7720
7. Finish
   Knob, gray or black color number 36231 or 37038 per FED-STD-595
   Index line, white color number 37875 per FED-STD-595.
   Insert, nickel plate per QQ-N-290, bright, type VII, class 2.
8. Percent transmittance 12 0 ±3%.
9. There shall be no light leak around the setscrew.
10. Bottom surface of the knob shall be polished.
11. All outside corners and inside fillets shall have a .04 (1 02 mm) radius

APPROVED 6 Jul 55 REVISED (A) 10 Oct 55 (B) 22 Jan 57 (C) 10 Sep 58 (D) 24 Nov 64 (E) 17 Jun 75

User activities Army Navy Air Force
Reviewer activities Army Navy Air Force
This military standard is approved for use by Naval Air Systems Command Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense

P A Navy-AS	Interna tional n ates	TITLE	MILITARY STANDARD
Other Cus USAF-11 Army-EL		KNOB, POINTER, ILLUMINATED, SMALL	MS25165
P rocurement Specifi cation MIL-K-25049		SUPERSEDES	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.