

FED. SUP CLASS 5935

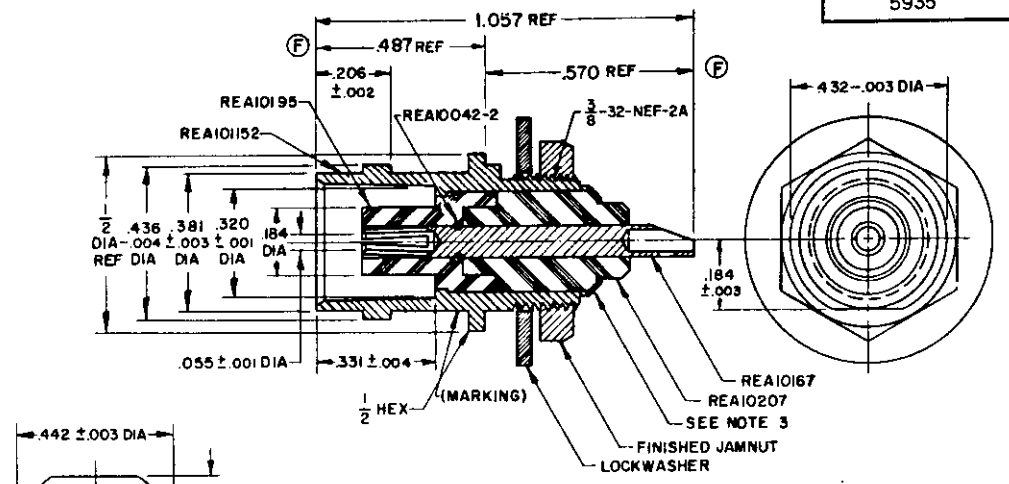



CANCELED AFTER 22 MAR 69
USE MIL-C-39012/21-0001

MS PART NO.	MS27035-625B

	Dwg or Part No.	Description	Qty
	REA10042-2	Ring	1
	REA10167	Center contact	1
	REA10195	Insulator	1
	REA10207	Insulator	1
	REA101152	Body	1
(F)	- -	Lockwasher No. 1820-12 Shakeproof Inc., Chicago, Ill. or equal	1
	MS35125-2(SigC)	Nut	1

INCHES	MM	INCHES	MM
.001	.03	.331	8.41
.002	.05	.381	9.68
.003	.08	.432	10.97
.004	.10	.436	11.07
.055	1.40	.442	11.23
.184	4.67	.487	12.37
.189	4.80	1/2	12.70
.206	5.23	.570	14.48
.320	8.13	1.057	26.85

NOTES:
1. All dimensions are in inches.
2. Unless otherwise specified, tolerance is ±1/64 (.40 mm) on fractions and ±.005 (.13 mm) on decimals.
3. Form over all around.
4. Stud axis may be rotated 90° to facilitate assembly. Studs may be fabricated separately and silver soldered in place. When the soldered-stud type of construction is used, the studs to withstand a pull of 150 pounds and a torque of 20 inch-pounds.
5. The assembly part number consists of the MS military-standard number followed by a dash number. The dash number '625B' is derived from assigned nomenclature.
6. Receptacle UG-625B/U replaces receptacles UG-625/U and -625A/U.
7. Assigned AN nomenclature is Connector, Receptacle UG-625B/U.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

ENGINEERING DATA: Small, quick-disconnect radio-frequency coaxial connector; rated at 500 volts peak; for use with RG-58/U or similar small-sized RF cable. Designed to accommodate a panel .045 (1.14 mm) to 1/8 (3.18 mm) inch thick maximum.

APPROVED 18 OCT 1960 REVISED (F) 6 February 1967 (G) CANCELLED 22 March 1969

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
Army EL+, MU+, MI+, MO@ Navy SH+, WP+, MC@
AF 11+, 17+

P.A. EL / Other Cust SH 11	International interest	TITLE: CONNECTOR, RECEPTACLE, ELECTRICAL, SERIES BNC, UG-625 B/U	MILITARY STANDARD MS 27035
Procurement Specification MIL-C-3608		SUPERSEDES: SH DWG REA 49028	SHEET 1 OF 1

DD FORM 10 APR 64 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1665-16

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-518/A-5401

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.