
FED SUP CLASS 5935

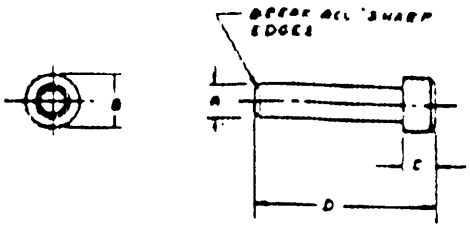

MS PART NUMBER	CONNECTOR CONTACT SIZE	A DIA	B DIA	C	D	COLOR CODE	SUPERSEDED BY
MS27186-1	20	.066 .060	.085 .080	.125 .110	.686 .670	RED	MS27488A20
-2	16	.082 .076	.093 .087	.451 .439	.940 .934	WHITE	MS27488A16
-3	50 Ω COAX	.088 .082	.119 .113	.394 .382	.919 .907	WHITE	MS27488A12

(E)

MATERIAL: POLYTETRAFLUOROETHYLENE EXTRUDED STOCK, MECHANICAL GRADE.
ALL DIAMETERS TO BE CONCENTRIC WITH EACH OTHER WITHIN .005 TIR.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE ANGLES ±5°.
[illegible] FOR USE WITH MIL-C-[illegible], MS [illegible] AND MIL-C-[illegible].

(B) CANCELLED - FOR PROCUREMENT USE MS27488E.

(B) Denotes change.

APPROVED 21 DEC 1961 REVISED (A) 11 MARCH 1965 (B) 20 APRIL 1977

P.A. AIR FORCE -85 Other Cust	Preparing activity	TITLE PLUG, END SEAL, ELECTRICAL CONNECTOR, SIZE 16, 20 AND 50Ω COAXIAL	MILITARY STANDARD MS 27186 (USAF)
Procurement specification NONE		SUPERSEDES	PAGE 1 OF 1

DD FORM 1 MAY 73 672

5935-F119

User activities:

Review activities: (Air Force - 99)

This military standard is approved for use by Directorate of Electronic Support (AFALD/PTM), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:17Z
Check the source to verify that this is the current version before use.