
FED. SUP CLASS.
4820

BOTH ENDS IN ACCORDANCE WITH AND10050

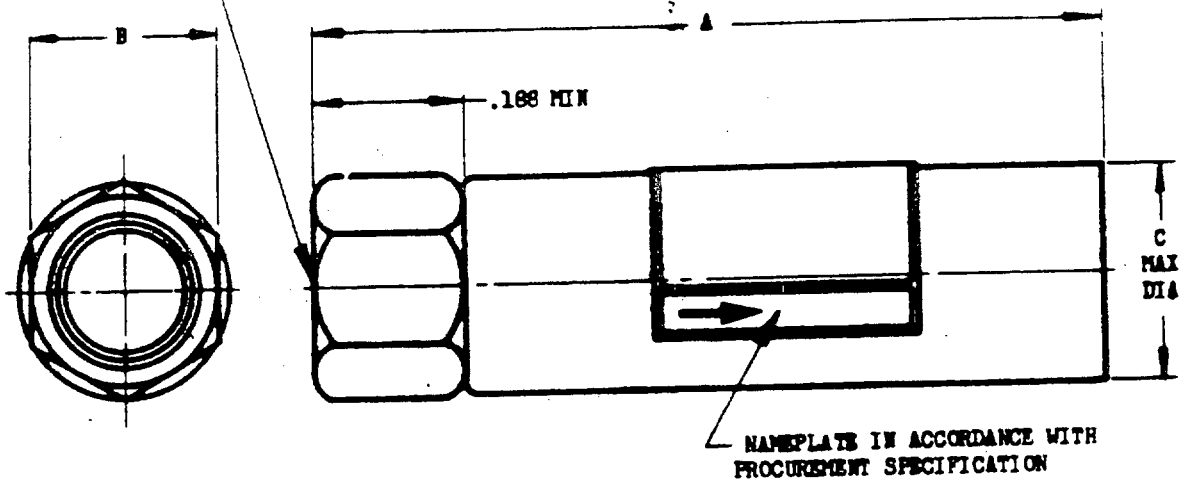

MS PART NO.	TUBING OD	A ±.031	B	C MAX DIA
MS28886-4-	1/4	3.188	.875	1.000
MS28886-6-	3/8	3.812	.875	1.000
MS28886-8-	1/2	4.125	1.062	1.313
MS28886-10-	5/8	5.250	1.250	1.375
MS28886-12-	3/4	5.875	1.500	1.687

MS PART NO.	INDIVIDUAL FLOW SETTINGS - GALLONS PER MINUTE FLOW RATE IN G.P.M. IS SECOND DASH NO. OF REGULATOR MS PART NUMBER									
MS28886- 4-	.12	.25	.38	.50	.75	1.0	1.2			
MS28886- 6-	1.5	1.75	2	2.5	3	3.5				
MS28886- 8-	4	4.5	5	5.5	6					
MS28886-10-	6.5	7.5	8.5	9.5	10.5					
MS28886-12-	12	13	14	15	16					
MS28886-16-	17	20	23	26	29					

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

EXAMPLE OF PART NO.: MS28886-6-3.5 = 3/8-TUBE SIZE, CAPACITY 3.5 GPM.

APPROVED 4 Apr 53 REVISED (A) 26 May 55 (B) 28 Jul 58 (C) 7 Nov 61

P.A. Navy - Wep Other Cust Army - TC USAF - OCAMA	TITLE VALVE, AIRCRAFT HYDRAULIC FLOW REGULATOR	MILITARY STANDARD MS28886
Procurement Specification MIL-V-8566	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 87 672 (Continued) OBSOLETE EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE—When ... amend drawings, specifications, or other data are used for any purpose other than in connection with a def... thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Govern... may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory ... activities. Suggestions for ... use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.