



FED. SUP CLASS
5905

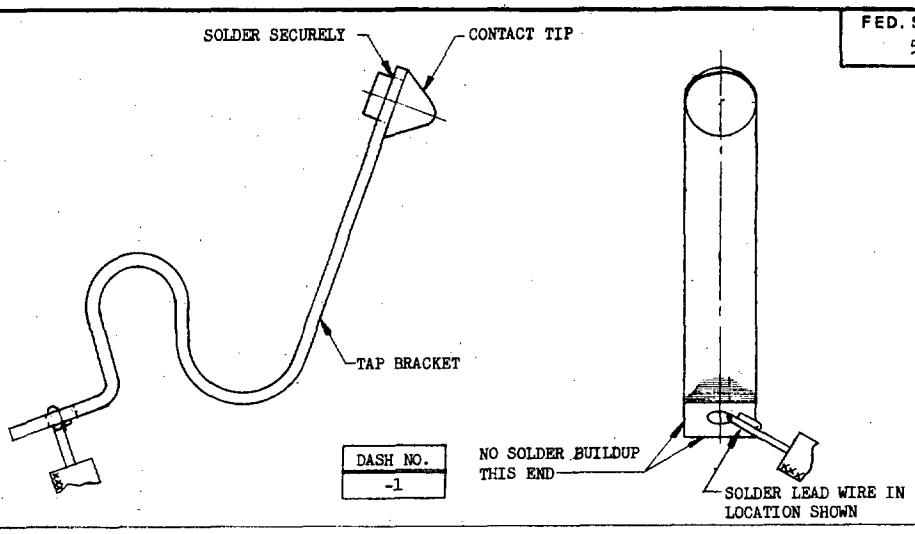

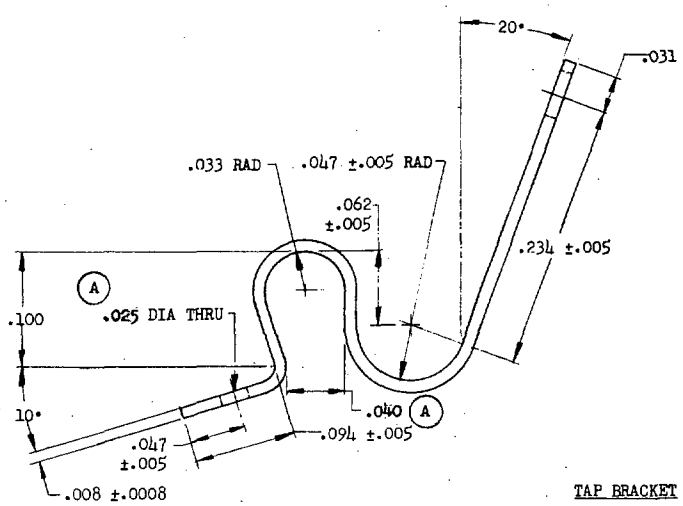


TAP BRACKET

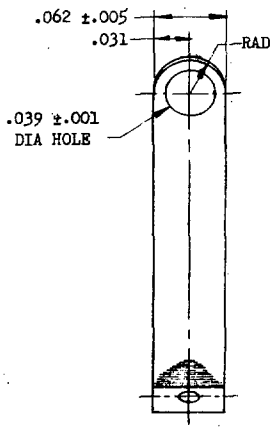



CONTACT TIP



AVERAGE LENGTH PER UNIT = 4.5

WIRE LEAD

(A) MATERIAL: TAP BRACKET; PHOSPHER BRONZE, SAE 77, GRADE A, 8 NUMBERS HARD, SPRING TEMPER, COIL.
CONTACT TIP; NEY-ORO NO. 28 ALLOY OR EQUAL. AS PROCURED FROM J. M. NEY CO., TYPE NO. 1074A-2.
WIRE LEAD; MIL-W-16878, TYPE B-32, RED (32 AWG).

FINISH; TAP BRACKET; CADMIUM PLATE, QQ-P-416, IRRIDESCENT IRRIDITE.
CONTACT TIP; PLAIN.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.002, ANGLES ±2°.

LICENSED PATENTS: US NO. 2,619,570, 2,898,567, AND 2,926,321.
THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THESE PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 15 May 62 REVISED (A) 14 Feb 66

User activities:
Navy - WP
USAF - 85

Review activities:
Navy - WP
USAF - 85

This standard has been approved by the BuWep (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - WP Other Cust USAF - 85 (A)	TITLE CONTACT, ELECTRICAL, LEAF TAP FOR USE WITH MIL-R-8903 RESISTOR	MILITARY STANDARD MS28902 (ASG)
PROCUREMENT SPECIFICATION MIL-R-8903 (A)	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Limited coordination)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.