
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
USER ACTIVITIES
REVIEWER ACTIVITIES
AMSC - N/A
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

FED. SUP CLASS 1650

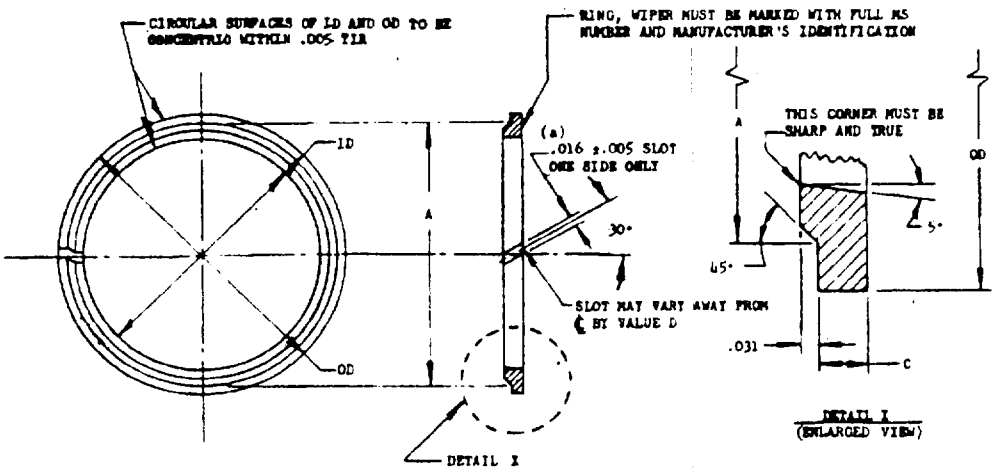

DASH NO. METALLIC	(b) PTFE	WITH RUBBER	NOMINAL ROD OD	RING WIPER (a) OD +.000 -.005	(a) ID +.002 -.003	A ±.005 DIA	C +.000 -.010	D MAX
1	1T	1R	1/2	.740	.494	.617	.094	.050
2	2T	2R	9/16	.803	.556	.680		
3	3T	3R	5/8	.865	.619	.742		
4	4T	4R	11/16	.928	.681	.804		
5	5T	5R	3/4	.990	.744	.867		
6	6T	6R	13/16	1.032	.805	.919		
7	7T	7R	7/8	1.094	.868	.982		
8	8T	8R	15/16	1.157	.930	1.044		
9	9T	9R	1	1.219	.993	1.106		
10	10T	10R	1 - 1/16	1.282	1.055	1.169		
11	11T	11R	1 - 1/8	1.344	1.118	1.232		
12	12T	12R	1 - 3/16	1.407	1.180	1.294		
13	13T	13R	1 - 1/4	1.469	1.243	1.356		
14	14T	14R	1 - 5/16	1.594	1.305	1.450		
15	15T	15R	1 - 3/8	1.657	1.368	1.512		
16	16T	16R	1 - 7/16	1.719	1.430	1.575		
17	17T	17R	1 - 1/2	1.782	1.493	1.638		
18	18T	18R	1 - 5/8	1.907	1.618	1.763		
19	19T	19R	1 - 3/4	2.032	1.743	1.888		
20	20T	20R	1 - 7/8	2.157	1.868	2.013		

(a) DIMENSIONS TO BE TAKEN WITH RING INSTALLED ON ROD AS SPECIFIED IN PROCUREMENT SPECIFICATION.

(b) POLYTETRAFLUOROETHYLENE

FINISH: SEE PROCUREMENT SPECIFICATION.

PLATING: SEE PROCUREMENT SPECIFICATION.

MATERIAL: SEE PROCUREMENT SPECIFICATION.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES; DECIMALS ±.016, ANGLES ±1/2°.

MAXIMUM SATISFACTORY OPERATING TEMPERATURE OF RING, WIPERS UTILIZING RUBBER IS 160°F.

EXAMPLES OF PART NUMBER: MS28903-5 - RING, WIPER FOR .750 OD ROD EITHER SINGLE OR MULTIPIECE CONSTRUCTION, USING METAL AS A ROD BEARING MATERIAL.
MS28903-5T- RING, WIPER FOR .750 OD ROD EITHER SINGLE OR MULTIPIECE CONSTRUCTION, USING POLYTETRAFLUOROETHYLENE AS ROD BEARING MATERIAL.
MS28903-5R- RING, WIPER FOR .750 OD ROD EITHER SINGLE OR MULTIPIECE CONSTRUCTION, USING RUBBER AS ROD BEARING MATERIAL.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) CANCELED _____. USE MS 28776. MS 28903 MAY BE USED UNTIL SUPPLIES ARE EXHAUSTED.

APPROVED 24 Feb 1965 REVISED (A) 9 NOV 87

P.A. USAF - 71 (A) Orig Cont Navy - AS (A) AIRFORCE - 99	TITLE: RING, WIPER, HYDRAULIC AND PNEUMATIC, PISTON ROD, DIRT	MILITARY STANDARD MS28903(ASG)
PROCUREMENT SPECIFICATION MIL-R-8913	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 1650-0413

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.