This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS: USER

DD FORM 1 SEP 67 672-1 (Coordinated)

P.A. AIR FORCE - 11
Other Cust
ARMT - AV

PROCUREMENT SPECIFICATION

SUPERSEDES:

TITLE

DIMENSIONS, CLEARANCE, COCKPIT FIXED WING AIRCRAFT

SHEET 1 OF 1


MILITARY STANDARD

MS33573

1. THE 30 INCH EJECTION CLEARANCE LINE SHALL BE MEASURED PERPENDICULAR FROM THE EJECTION LINE OF THE SEAT REFERENCE POINT.
2. ALL MEASUREMENTS ARE BASED UPON THE SEAT REFERENCE POINT AT THE CENTERLINE OF THE SEAT IN THE NEUTRAL POSITION.
3. THERE SHALL BE NO PROJECTIONS, SUCH AS THROTTLES, LANDING GEAR CONTROL, INSTRUMENT PANEL, ETC. INTO THE ESCAPE OPENING THAT WOULD INTERFERE WITH EJECTION.
4. CANOPIES SHALL BE SO ARRANGED THAT WHEN THE PILOT'S HEAD IS IN THE NORMAL POSITION, NORMAL OR EMERGENCY OPERATION OF THE CANOPY SHALL BE SUCH THAT NO PART OF THE CANOPY CAN STRIKE THE PILOT'S HEADGEAR.
5. THIS DIMENSION SHALL BE 26 INCHES FOR AIRCRAFT IN WHICH PRESSURE SUITS ARE NOT EMPLOYED, AND 30 INCHES FOR AIRCRAFT IN WHICH PRESSURE SUITS ARE EMPLOYED.
6. ADDITIONAL CLEARANCE SHALL BE AS SPECIFIED BY THE PROCURING ACTIVITY. eg THERMAL CLOSURE, FACE CURTAIN CONTROL, ETC.
7. DIMENSIONS IN INCHES.

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER.

(B) CANCELED AFTER 27 JANUARY 1978. USE MIL-STD 1333 FOR ARMY, NAVY AND DESIGN HANDBOOK DH2-2 FOR AIR FORCE.

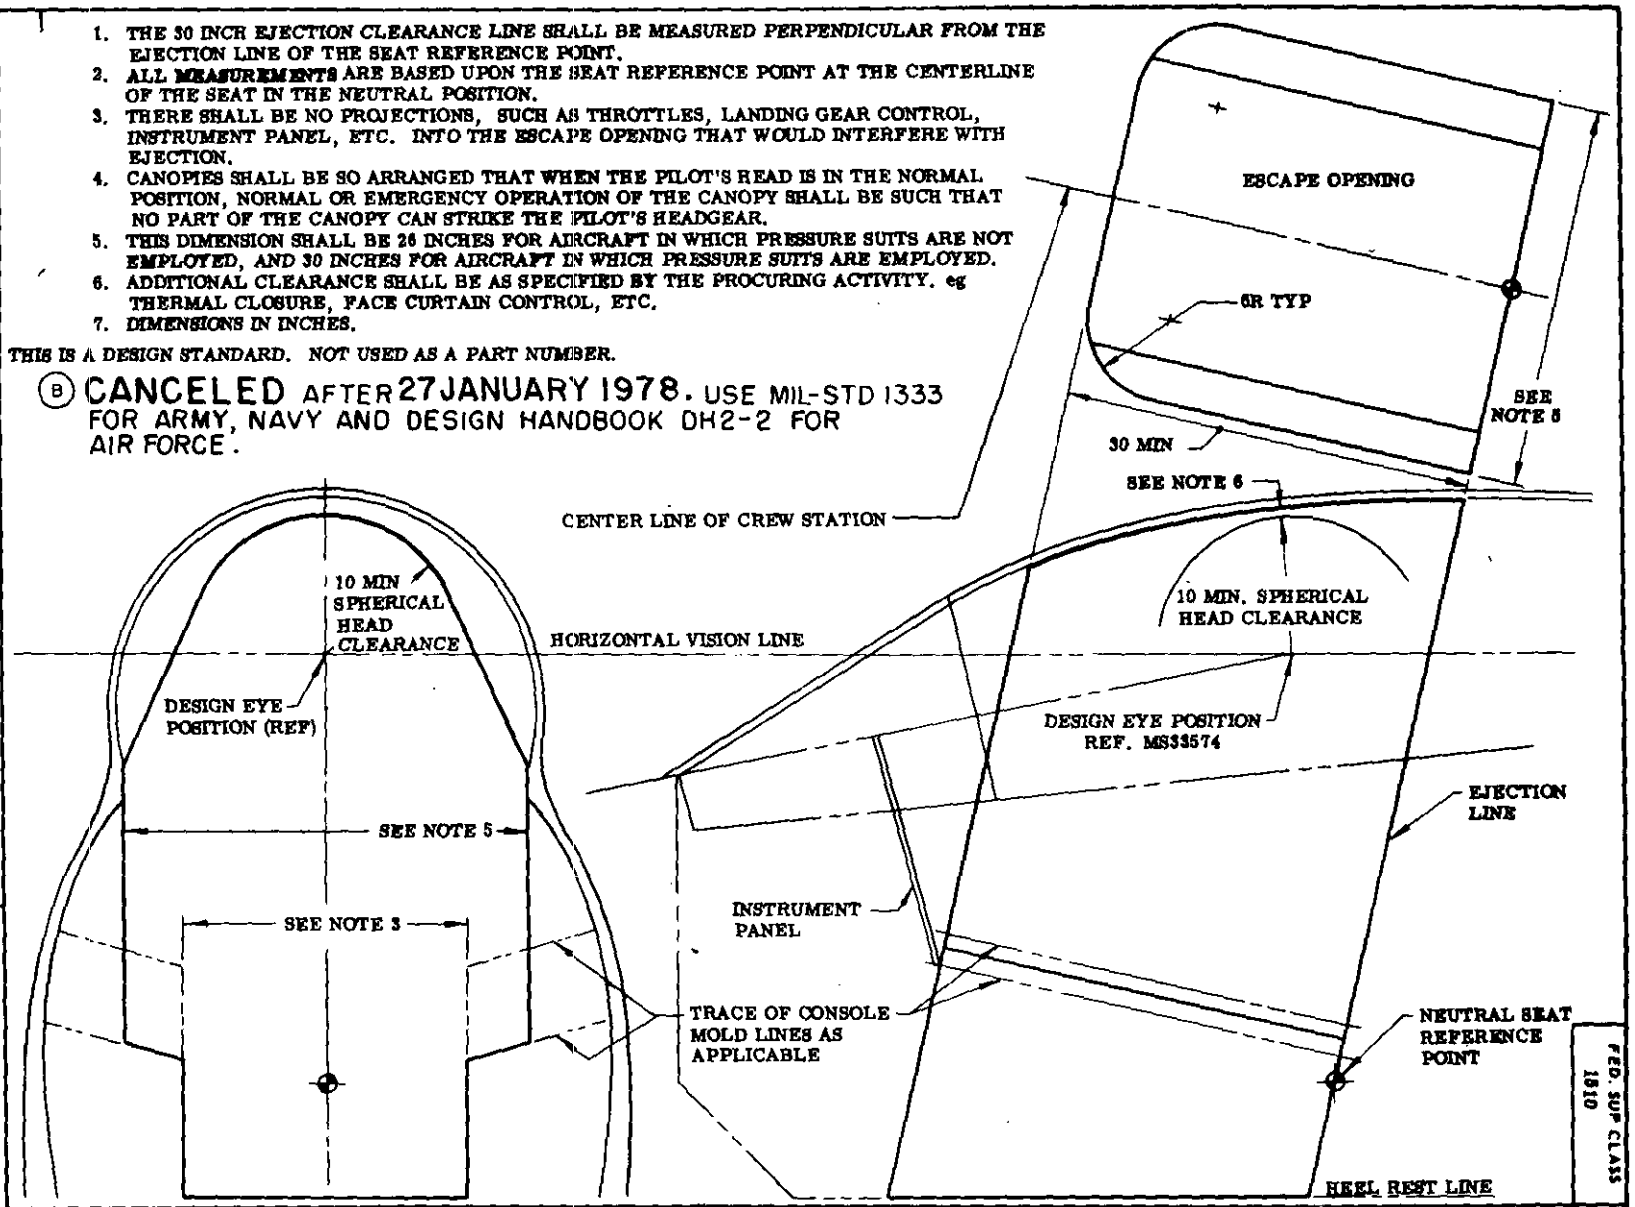

APPROVED 25 SEP 56 REVISED (A) 5 JUNE 1967 (B) 27 Jan 78

FED. SUP CLASS 1810

Proj. No. 1510-0022 PLATE NO. 15320

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

GPO 1978-703-122/939

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:05Z
Check the source to verify that this is the current version before use.