FED. SUP CLASS
4730

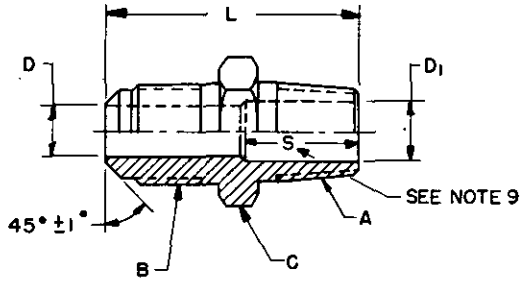


TABLE I
STANDARD SIZES - RECOMMENDED FOR NEW DESIGN AND ENGINEERING

DASH NUMBER	TUBE OD NOM	(D) A PIPE THREAD NPTF	B STRAIGHT THREAD CLASS 2A	C HEX FLAT NOM	D DIAMETER DRILL	D_1 DIAMETER DRILL	L ±0.03	S MAX
1	1/8	1/8	0.312-24UNF	0.438	0.078	0.219	0.92	0.46
2	3/16	1/8	0.375-24UNF	0.438	0.125	0.219	1.00	0.48
3	1/4	1/8	0.438-20UNF	0.438	0.188	0.219	1.06	0.48
4	5/16	1/8	0.500-20UNF	0.500	0.219	0.219	1.16	----
5	3/8	1/4	0.625-18UNF	0.625	0.281	0.312	1.44	0.69
6	7/16	1/4	0.688-16UN	0.688	0.312	0.312	1.53	----
7	1/2	3/8	0.750-16UNF	0.750	0.406	0.406	1.62	----
8	5/8	1/2	0.875-14UNF	0.875	0.500	0.562	2.00	0.94
9	3/4	1/2	1.062-14UNS	1.062	0.625	0.562	2.19	1.22
10	7/8	3/4	1.250-12UNF	1.250	0.750	0.750	2.37	----
11	1	1	1.375-12UNF	1.375	0.875	0.938	2.62	1.22

TABLE II
* NONSTANDARD SIZES - NOT RECOMMENDED FOR NEW DESIGN AND ENGINEERING

DASH NUMBER	TUBE OD NOM	(D) A PIPE THREAD NPTF	B STRAIGHT THREAD CLASS 2A	C HEX FLAT NOM	D DIAMETER DRILL	D_1 DIAMETER DRILL	L ±0.03	S MAX
20*	1/4	1/4	0.438-20UNF	0.562	0.188	0.312	1.25	0.66
21*	1/4	3/8	0.438-20UNF	0.688	0.188	0.406	1.31	0.69
22*	1/4	1/2	0.438-20UNF	0.875	0.188	0.562	1.56	0.91
23*	5/16	1/4	0.500-20UNF	0.562	0.219	0.312	1.34	0.67
24*	5/16	3/8	0.500-20UNF	0.688	0.219	0.406	1.38	0.69
25*	3/8	1/8	0.625-18UNF	0.625	0.281	0.219	1.25	0.75
26*	3/8	3/8	0.625-18UNF	0.688	0.281	0.406	1.44	0.69
27*	3/8	1/2	0.625-18UNF	0.875	0.281	0.562	1.69	0.91
28*	3/8	3/4	0.625-18UNF	1.062	0.281	0.750	1.81	0.97
29*	1/2	1/4	0.750-16UNF	0.750	0.406	0.312	1.62	0.91
30*	1/2	1/2	0.750-16UNF	0.875	0.406	0.562	1.81	0.91
31*	1/2	3/4	0.750-16UNF	1.062	0.406	0.750	1.94	0.97
32*	5/8	1/4	0.875-14UNF	0.875	0.500	0.312	1.81	1.07
33*	5/8	3/8	0.875-14UNF	0.875	0.500	0.406	1.81	1.07
34*	5/8	3/4	0.875-14UNF	1.062	0.500	0.750	2.06	0.97
35*	3/4	3/4	1.062-14UNS	1.062	0.625	0.750	2.19	0.97

NOTES:
1. MATERIAL: Brass in accordance with QQ-B-626, alloy CA360, temper half hard or SAE CA360, half hard.
2. PROTECTIVE COATING: None
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with SAE Standard for 45° Flared Tube Fittings (SAE J512).
4. THREADS: Threads shall be in accordance with Screw Thread Standards for Federal Services, Handbook H28.
5. PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS39158-1.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. The illustration is for identification and is not intended to restrict designs or shapes not dimensioned.
9. At manufacturer's option, through passages may conform with the smaller diameter specified or be counterbored to the larger diameter from the appropriate end for depth S.

(E) CANCELLED =FOR PROCUREMENT USE SAE J512

P.A. WC Other Cust	TITLE ADAPTER, STRAIGHT, PIPE TO TUBE, MALE PIPE END, 45° FLARE TYPE, AUTOMOTIVE	MILITARY STANDARD MS39158
PROCUREMENT SPECIFICATION MIL-F-1224	SUPERSEDES: CNAX2 in part	SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
AMSC/NA
4730-0931

APPROVED 3 APR 62 REVISED (A) 27 FEB 67 (B) 22 OCT 69 (C) 6 JUN 75 (D) 5 NOV 75 (E) 1-5-87

REVIEWER: AT, CS, ME, MI
USER: AV, GL, MU, OS, YD

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:47Z
Check the source to verify that this is the current version before use.