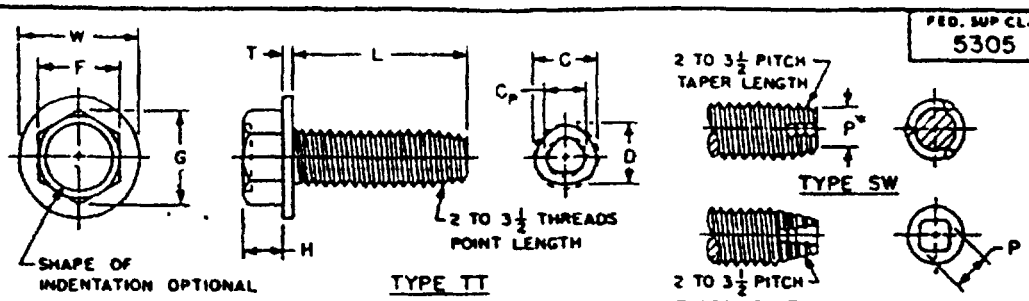


NOMINAL SIZE		.138	.190	.250
THREADS PER INCH		32	24	20
F ACROSS FLATS	MAX	.250	.312	.375
	MIN	.244	.305	.367
G ACROSS CORNERS	MIN	.272	.340	.409
H HEAD HEIGHT	MAX	.093	.120	.190
	MIN	.080	.105	.172
T WASHER THICKNESS	MAX	.025	.031	.050
	MIN	.015	.019	.030
W WASHER DIAMETER	MAX	.328	.414	.520
	MIN	.302	.384	.480
C DIAMETER	MAX	.141	.194	.2550
	MIN	.135	.188	.2490
C_p POINT DIAMETER	MAX	.111	.153	.206
D ACROSS CENTER	MAX	.135	.185	.2460
	MIN	.129	.179	.2400
P^* POINT DIAMETER TYPE SW	MAX	.096	.1295	.150
	MIN	.091	.1245	.175
P POINT DIAMETER TYPE SF	MAX	.106	.147	.195
	MIN	.095	.133	.181

L LENGTH	TOL	DASH NUMBER					
		CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL
.250	+.000 -.030	1	C1				
.375		2	C2	12	C12		
.500		3	C3	13	C13	23	C23
.625		4	C4	14	C14	24	C24
.750		5	C5	15	C15	25	C25
.875	+ .000 - .050			16	C16	26	C26
1.000				17	C17	27	C27
1.250						28	C28
1.500						29	C29
1.750	+.000 -.060					30	C30
2.000						31	C31

* Before threading

NOTES
1. MATERIAL Carbon steel and corrosion-resisting steel (410) in accordance with procurement specification.
2. PROTECTIVE COATING: Carbon steel-Cadmium plated in accordance with QQ-P-416, Type II, Class 2 or MIL-C-81562, Type II, Class 2.
   Corrosion-resisting steel-Passivated in accordance with QQ-P-35.
3. THREADS The threads shall be in accordance with the applicable requirements of the procurement specification.
4. DIMENSIONS. All dimensions are in inches.
5. PART NUMBER. The MS part number consists of the MS number, plus the dash number.
   Example MS51869-1.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Type TT tri-lobular section is maintained throughout the full length of the screw.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

MILITARIZED: AV, IS, MU, NS
USAF: AS, AT, MC, ML, OS, YD

APPROVED 28 SEP 1972 REVISED

P A MC Other Cust SH 82	TITLE SCREW, TAPPING-HIGH PERFORMANCE, THREAD ROLLING, TYPES SF, SW AND TT, HEXAGON WASHER HEAD	MILITARY STANDARD MS51869
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES MS51869 in part	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.