MS9808

FED. SUP CLASS
5306

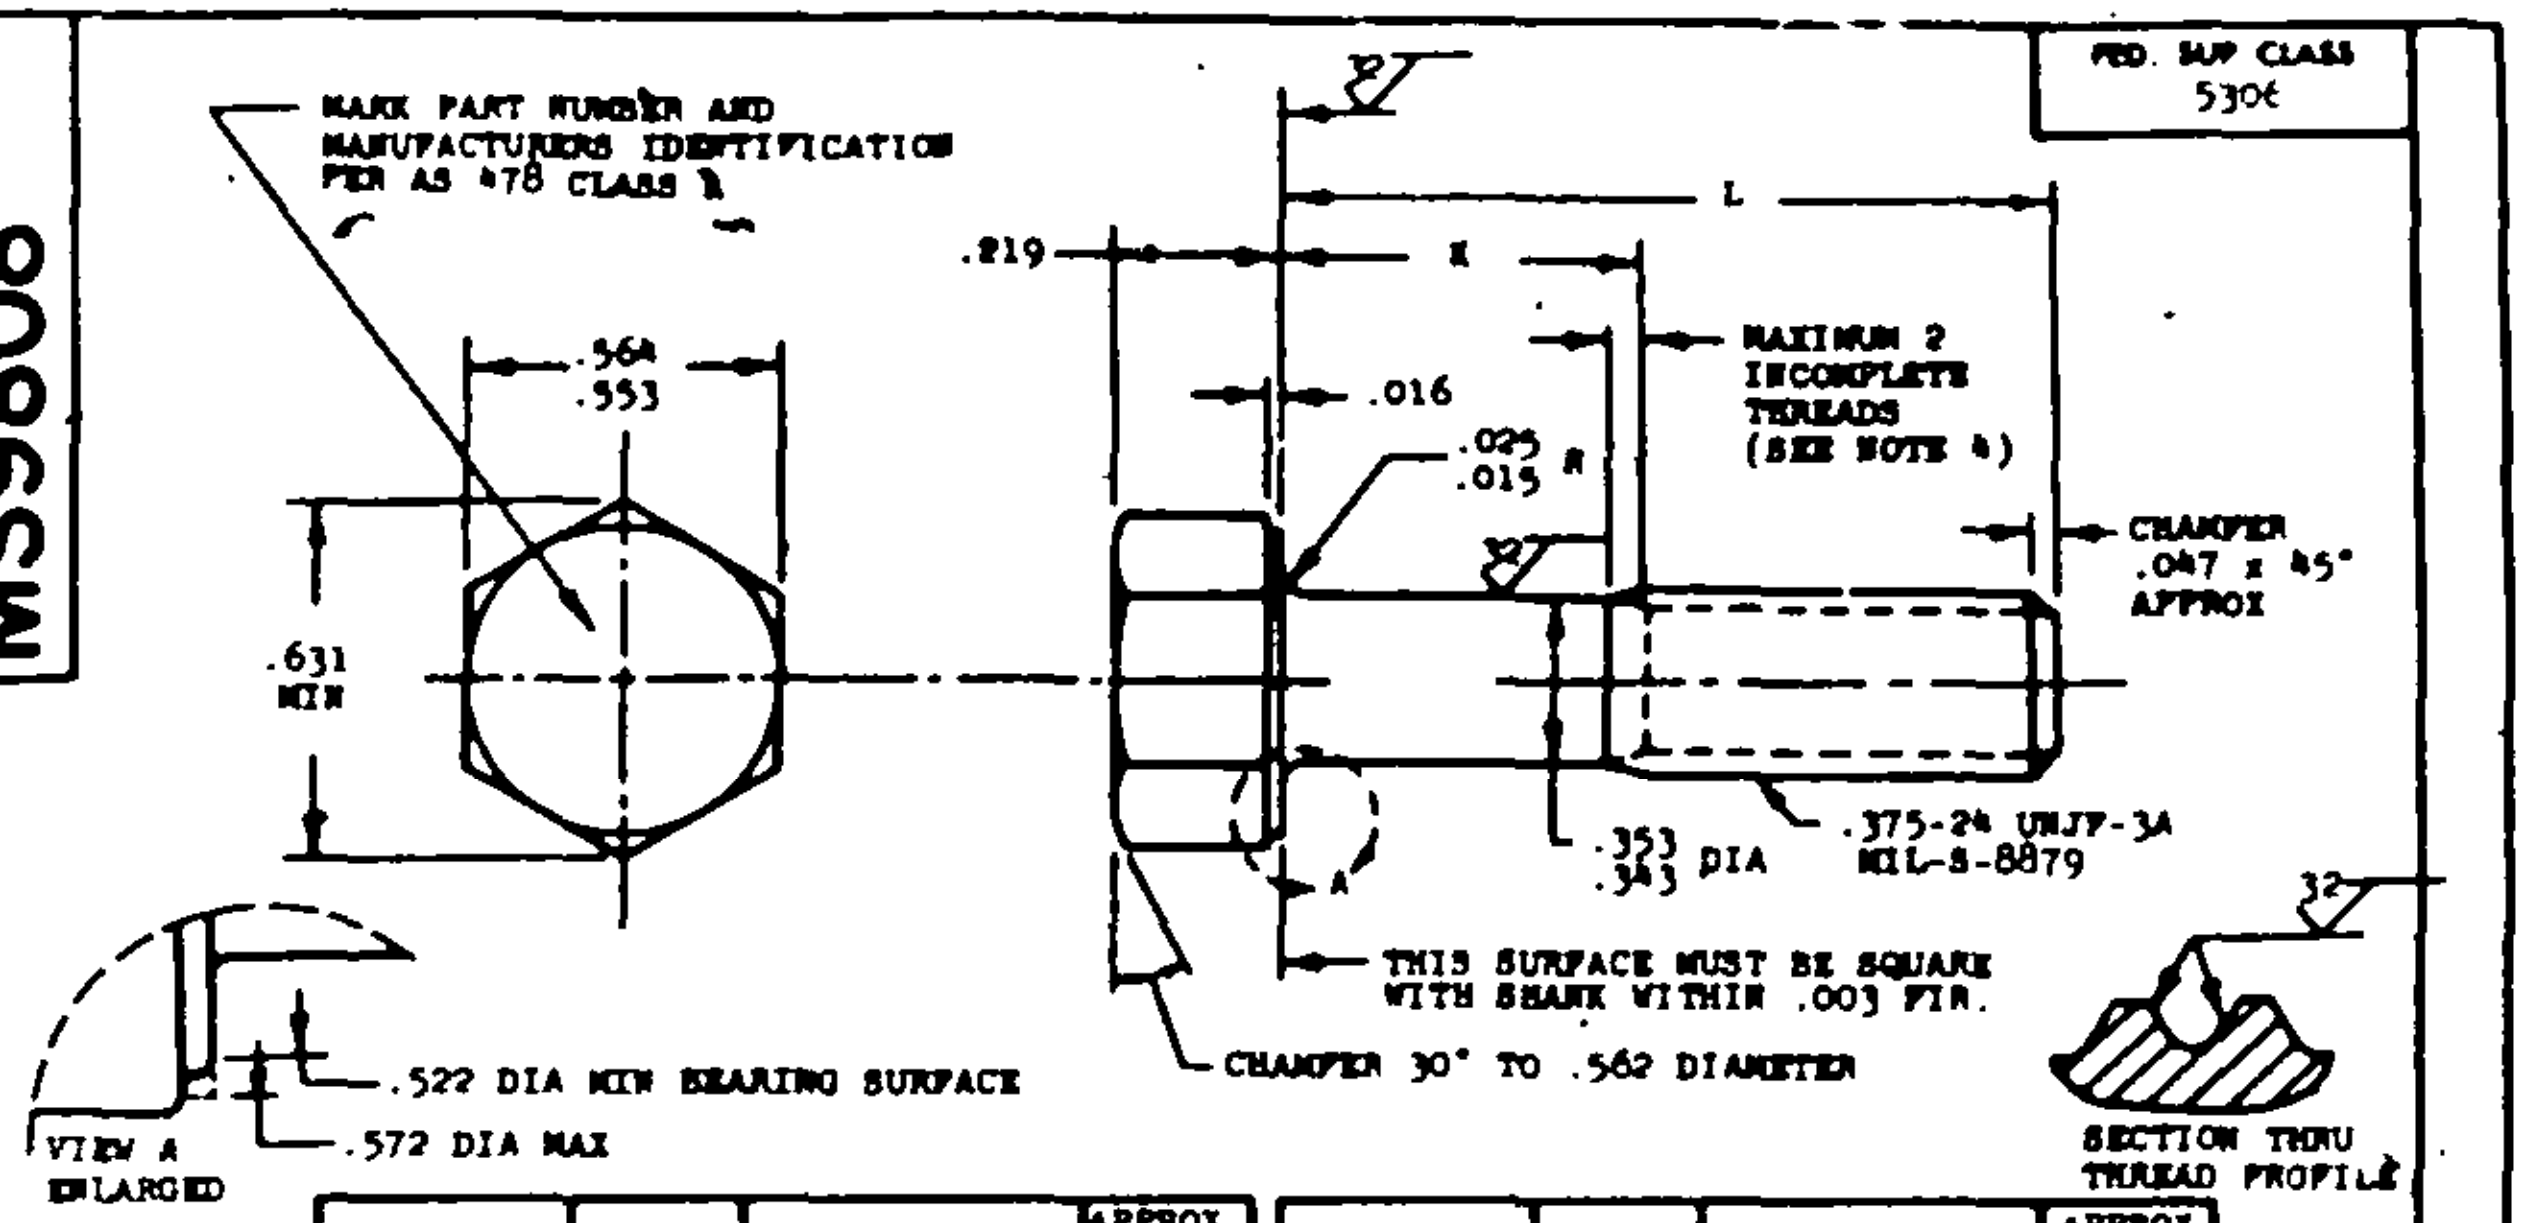
MARK PART NUMBER AND MANUFACTURERS IDENTIFICATION PER AS 478 CLASS B
.564
.553
.631 MIN
32
L
.219
K
.016
.025
.015 R
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
32
CHAMFER .047 x 45° APPROX
.375-24 UNJF-3A MIL-S-8879
.353
.343 DIA
A
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR.
CHAMFER 30° TO .562 DIAMETER
.522 DIA MIN BEARING SURFACE
.572 DIA MAX
VIEW A ENLARGED
32
SECTION THRU THREAD PROFILE

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9808-03	.562	.088- .108	3.17
MS9808-04	.625	.088- .108	3.34
MS9808-05	.688	.088- .108	3.51
MS9808-06	.750	.088- .108	3.68
MS9808-07	.812	.088- .108	3.84
MS9808-08	.875	.088- .108	4.01
MS9808-09	.938	.088- .108	4.18
MS9808-10	1.000	.088- .108	4.35
MS9808-11	1.062	.088- .108	4.51
MS9808-12	1.125	.088- .125	4.68
MS9808-13	1.188	.128- .188	4.85
MS9808-14	1.250	.190- .250	5.02
MS9808-15	1.312	.252- .312	5.19
MS9808-16	1.375	.315- .375	5.35
MS9808-17	1.438	.378- .438	5.52
MS9808-18	1.500	.440- .500	5.69
MS9808-19	1.562	.502- .562	5.86
MS9808-20	1.625	.565- .625	6.03
MS9808-21	1.688	.628- .688	6.19
MS9808-22	1.750	.690- .750	6.35
MS9808-23	1.812	.752- .812	6.52
MS9808-24	1.875	.815- .875	6.69
MS9808-25	1.938	.878- .938	6.85
MS9808-26	2.000	.940-1.000	7.02
MS9808-27	2.125	1.065-1.125	7.36
MS9808-28	2.250	1.190-1.250	7.70
MS9808-29	2.375	1.315-1.375	8.03
MS9808-30	2.500	1.440-1.500	8.37
MS9808-31	2.625	1.565-1.625	8.70
MS9808-32	2.750	1.690-1.750	9.03
MS9808-33	2.875	1.815-1.875	9.37
MS9808-34	3.000	1.940-2.000	9.70
MS9808-35	3.125	2.065-2.125	10.04
MS9808-36	3.250	2.190-2.250	10.37
MS9808-37	3.375	2.315-2.375	10.71
MS9808-38	3.500	2.440-2.500	11.05
MS9808-39	3.625	2.565-2.625	11.37
MS9808-40	3.750	2.690-2.750	11.71
MS9808-41	3.875	2.815-2.875	12.04
MS9808-42	4.000	2.940-3.000	12.38
MS9808-43	4.125	3.065-3.125	12.72
MS9808-44	4.250	3.190-3.250	13.05
MS9808-45	4.375	3.315-3.375	13.39
MS9808-46	4.500	3.440-3.500	13.71
MS9808-47	4.625	3.565-3.625	14.05
MS9808-48	4.750	3.690-3.750	14.39
MS9808-49	4.875	3.815-3.875	14.72
MS9808-50	5.000	3.940-4.000	15.06
MS9808-51	5.125	4.065-4.125	15.39
MS9808-52	5.250	4.190-4.250	15.73
MS9808-53	5.375	4.315-4.375	15.07
MS9808-54	5.500	4.440-4.500	16.39
MS9808-55	5.625	4.565-4.625	16.73
MS9808-56	5.750	4.690-4.750	17.06
MS9808-57	5.875	4.815-4.875	17.40
MS9808-58	6.000	4.940-5.000	17.74

1. SHANK SHALL BE STRAIGHT WITHIN .0025 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .017 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

REVISED

APPROVED 11 MAR 70

Review activities USAF-82

P.A.
USAF-11

Other Cust
ARMY - AV
NAVY - AS

INTERNATIONAL INTEREST
ABCC AIR STD
17/2

TITLE
BOLT, MACHINE - HEXAGON HEAD,
PD SHANK, AMS 5643, .375-24 UNJF-3A

MILITARY STANDARD
MS9808

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-096/S-5209

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:25Z
Check the source to verify that this is the current version before use.