| INCH POUND |

MIL-U-18182E
29 MARCH 1991
SUPERSEDING
MIL-U-18182D
20 April 1984

MILITARY SPECIFICATION

UNION, PIPE, FORGED STEEL, THREADED, WATER-OIL-GAS (2,000, 3,000 AND 6,000 LB/IN^2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers forged steel threaded pipe unions having ground joint union seats adaptable for severe conditions.

1.2 Classification.

1.2.1 Part numbers. A Part or Identifying Number (PIN) has been established. The PIN is made up of the document identifier and the PIN code numbers (see 6.2 and 6.5).

	PIN Code No.
Class 1 - 2,000 lb/in^2 (cold nonshock water, oil, gas) class 1 available in style A and B only....	01
Class 2 - 3,000 lb/in^2 (cold nonshock water, oil, gas) class 2 available in style A and B with UN and ACME thread coupling nut.....	02

|Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.|

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

	PIN Code No.
Class 3 - 6,000 lb/in^2 (cold nonshock water, oil, gas) class 3 is available in style A only	03
Style A - Ends, threaded female	A
Style B - Ends, threaded, one end male, other female	B
Size 0.125(inches)	01
0.25	02
0.375	03
0.5	04
0.75	05
1	06
1.25	07
1.5	08
2	09
2.5	10
3	11
Surface finish to code letter	
Uncoated	U
Coated	C

1.2.1.1 Class, style, size, and coupling nut. The class, style, and size of union and whether the class 2 union coupling nut has modified Acme threads are identified by two numeric digits (see Table I).

1.2.1.2 Surface finish. The finish (coated or uncoated) is identified by a single alphabetic character (see Table II).

TABLE I. Class, style, size, and coupling nut threads to code number.

			Class 2				
			Style A		Style B		
Nominal pipe size	Class 1		UN thread coupling nut	ACME thread coupling nut	UN thread coupling nut	ACME thread cpling nut	Class 3
	Style A	Style B					Style A
0.125	01	12	23	34	45	56	67
0.25	02	13	24	35	46	57	68
0.375	03	14	25	36	47	58	69
0.5	04	15	26	37	48	59	70
0.75	05	16	27	38	49	60	71
1	06	17	28	39	50	61	72
1.25	07	18	29	40	51	62	73
1.5	08	19	30	41	52	63	74
2	09	20	31	42	53	64	75
2.5	10	21	32	43	54	65	--
3	11	22	33	44	55	66	--

Class 1 - 2,000 lb/in^2 (cold nonshock water, oil, and gas).
Class 2 - 3,000 lb/in^2 (cold nonshock water, oil, and gas).
Class 3 - 6,000 lb/in^2 (cold nonshock water, oil, and gas).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

Style A - Ends, threaded female.
Style B - Ends, threaded, one end male and other end female (classes 1 and 2 only).

TABLE II. Surface finish to code letter.

Surface finish	Code letter
Uncoated (see 3.13.1)	U
Coated (see 3.13.2)	C

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-V-3 - Valve, Fittings, and Flanges (Except for Systems Indicated Herein) Packaging of.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents which are current on the date of the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI B1.20.1 - Pipe Threads, General Purpose (Inch).
ANSI B36.10M - Welded and Seamless Wrought Steel Pipe.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

ASTM

ASTM A 105/A105M - Forgings, Carbon Steel, For Piping Components.
ASTM A 153 - Zinc Coating (Hot-Dip) On Iron and Steel Hardware.
ASTM A 181/A181M - Forged or Rolled Steel Pipe Flanges, Forged Fittings, and Valves and Parts for General Service.
ASTM D 3951 - Commercial Packaging.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

MANUFACTURER'S STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-25 - Standard Marking System for Valves, Fittings, Flanges, and Unions.
MSS SP-83 - Carbon Steel Pipe Unions Socket-Welding and Threaded.

(Application for copies should be addressed to the Manufacturer's Standardization Society of the Valve and Fittings Industry Inc., 127 Park Street, N.I., Vienna, VA 22180.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

specification takes precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS.

3.1 Description. The union shall consist of a thread-piece provided with a female union seat, a nut-piece provided with a male union seat, and a union coupling nut. Union seats shall be of the ground joint type. The style A union shall be threaded with American Standard taper pipe threads (NPT) female at both ends. The style B union shall be threaded with NPT male on one end and female on the other, and shall be applicable only to class 1 and class 2 unions.

3.2 Manufacture. Unions shall either be hot-formed, cold-formed or machined from wrought bars. Swaged-end unions manufactured by swaging or upsetting pipe ends do not meet the requirements of this specification.

3.3 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification.

3.3.1 Carbon steel. The unions shall be manufactured from carbon steel conforming to ASTM A 181/A181M, Class 70, or ASTM A 105/A105M.

3.4 Standard commercial product. Each union of the same classification shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product, shall be included in the unions being furnished. Standard commercial product is a product which has been sold or is currently being offered for sale on the commercial market through advertisement, manufacturer's catalogs, or brochures, and represents the latest production model.

3.5 Identical items. All unions of the same classification, furnished under any specific contract, shall be physically and mechanically identical. This requirement includes parts, assemblies, components, and accessories. No deviation will be acceptable without prior written approval of the contracting officer.

3.6 Design. The design of the unions shall be in accordance with the manufacturers standard product and Class 2 unions shall be in compliance with paragraphs 8 and 10 of Manufacturers' Standardization Society SP-83.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

3.7 Size. The size of the union shall be the nominal pipe size of the pipe with which it is intended for use. The size required shall be as specified (see 6.2), in accordance with the following nominal pipe size range for each class of union:

Class 1 - 0.125 through 3 inches.
Class 2 - 0.125 through 3 inches.
Class 3 - 0.250 through 2 inches.

3.8 Union joint. Unions shall be furnished with either a ball-to-ball or ball-to-cone joint.

3.8.1 Seats. Union joint seats shall be integral or inserted.

3.8.1.1 Integral seats. Integral seats shall be machined directly in the parent metal of the union end pieces.

3.8.1.2 Inserted seats. Inserted seats may be either single or double. Single-insert seats shall consist of a seat ring secured to the union thread-piece and machined to the contour of the female seat to form a bearing surface for the male joint surface of the nut-piece. Double-insert seats shall consist of separate seat rings secured to each end piece. Insert seat rings shall be secured to the applicable end piece in such a manner as to become an integral part of the union.

3.8.1.2.1 Insert material. Insert seats, when used, shall be any of the listed materials for the union pressure specified (see 6.2):

2,000 pounds per square inch (lb/in^2) - Bronze or stainless steel.
3,000 lb/in^2 - Bronze, molybdenum steel or stainless steel.
6,000 lb/in^2 - Stainless steel.

3.8.2 Contact surfaces. The surfaces of all unions subjected to contact pressure in tightening shall be ground or machined to insure proper and leakproof seating.

3.9 Pressure. The unions shall be capable of withstanding a hydrostatic test pressure equal to 1.5 times the specified (see 6.2) rating pressure without impairing the serviceability of the union.

3.10 Union coupling nut.

3.10.1 Union coupling nut threads. Union coupling nut threads shall be the manufacturers commercial standard except, if specified (see 6.2), 3,000 lb/in^2 rated unions shall have modified Acme threads (see 6.4).

3.10.2 Coupling nut. The union coupling nut shall have parallel-sided polygon flats except the 3,000 lb/in^2 unions with modified Acme threads may have hammer (handle bar) style coupling nuts. When the union is closed, not less than four full threads shall be engaged by the nut.

3.10.3 Tensile breaking strength. When tested in accordance with 4.6.3, the tensile breaking strengths of the unions shall be not less than those listed in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

TABLE III. Minimum tensile strength of unions.

	Minimum ultimate breaking loads (in pounds)				
	Style A			Style B	
Size	Class 1	Class 2	Class 3	Class 1	Class 2
0.125	4,000	6,000	-	2,400	3,600
0.25	6,000	8,500	12,000	3,400	5,200
0.375	8,000	11,500	16,000	4,900	7,900
0.5	10,000	14,000	20,000	6,700	10,500
0.75	14,000	20,000	28,000	9,500	15,000
1	18,000	26,000	36,000	13,000	21,500
1.25	23,000	33,500	46,000	19,000	31,800
1.5	28,000	41,500	56,000	23,000	39,400
2	40,000	50,000	80,000	32,500	55,000
2.5	55,000	75,000	-	48,500	75,000
3	75,000	80,000	-	68,000	80,000

3.11 Ends.

3.11.1 Pipe connection. Threads for the end connections shall be in accordance with ANSI B1.20.1, NPT designation. Wall thickness shall be in accordance with the dimensional requirements of ANSI B36.10M for the pipe identification required (see Table IV.)

TABLE IV. Pipe identification corresponding to union class for determination of wall thickness.

Union Class Pipe identification
Class 1 Standard - STD (schedule No. 40)
Class 2 Extra strong - XS (Schedule No. 80)
Class 3 Double extra strong - XXS (No schedule Number)

3.11.2 Female threaded ends. The female threaded ends shall have a wall thickness of metal, between the thread root of the female pipe thread and either the cylindrical surface described by the outside diameter or the minimum dimension across the flats of the outer surface, not less than 87.5 percent of the nominal wall thickness for the pipe identification on which the union will be used (see Table IV).

3.11.3 Male threaded ends. The wall thickness on male threaded ends, before the threads are cut, shall be not less than the nominal wall thickness of pipe corresponding to the class of the union as listed in Table IV.

3.11.4 Wrench purchase. Each union end-piece shall be provided with an external wrench grip surface of sufficient length to permit adequate wrench purchase. The wrench grip shall be a parallel-sided polygon, or round with lugs.

3.12 Inside diameter. The inside diameter (bore) of the union shall be no smaller than the ID of ANSI B36.10M welded and seamless steel pipe for the pipe identification which corresponds to the required union class.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

3.13 Surface finish. Unions shall be uncoated unless coated as specified (see 6.2).

3.13.1 Uncoated. Coupling threads may be plated for the purpose of thread lubrication. Inorganic chemical surface treatments, such as rust inhibitors, will not disqualify uncoated unions as such.

3.13.2 Coated. Coated unions shall have zinc coating. The zinc coating shall be applied by the hot-dip process in accordance with ASTM A 153 before machining the threads or by the electroplating process either before or after machining.

3.14 Marking. The unions shall be stamped or otherwise permanently marked as specified in MSS SP-25.

3.15 Workmanship. The quality of workmanship shall be such as to produce material that is in accordance with the requirements of this specification. Unions shall be free from blemishes, burrs, forging cracks, and all other visible defects.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in this document shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Quality conformance inspection (see 4.2.1).
b. Packaging inspection (see 4.7).

4.2.1 Quality conformance inspection. Quality conformance inspection shall be performed on the unions selected in accordance with 4.4.1. This inspection shall include the examination of 4.5 and the tests of 4.6.

4.3 Inspection lot. All unions of the same class and style, offered to the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

Government at one time, shall be considered a lot for purpose of inspection.

4.4 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one union. All unions offered for delivery at one time shall be considered a lot for the purpose of inspection. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separate from new lots and shall be clearly identified as reinspected lots.

4.4.1 Sampling for examination. Guidance for inspection level and an Acceptable Quality Level (AQL) as specified.

4.4.2 Sampling for tests. Tests of the unions shall be based and an AQL based on inspection level S-2 and an AQL of 4.0 percent defective.

4.5 Examination. Each sample selected in accordance with 4.4.1 shall be examined for compliance with the requirements in Section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements or any necessary redesign or modification following failure to meet specified requirements, shall receive particular attention for adequacy and suitability. Examination shall be conducted as specified in Table V.

TABLE V. Classification of defects.

Categories	Defects
Major:	
101	Size and class not as specified.
102	Wrong style union.
103	Union joints not as specified.
104	Inserts not as specified.
105	Bearing surfaces not smooth.
106	Threads not as specified.
107	Unions not within tolerances.
108	Wrench grip surface not adequate.
109	Plating finish not as specified.
Minor:	
201	Identification marking not as specified.

4.6 Tests. Each sample selected in accordance with 4.4.2 shall be tested to determine compliance with this specification. Tests shall be conducted as specified in 4.6.1 through 4.6.3.

4.6.1 Air pressure test. The unions shall be tested for leaks under water

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

or light oil with air at 100 lb/in2 minimum pressure. Any leaks shall be cause for rejection. No copper or rusting solution, cement or welding will be permitted.

4.6.2 Hydrostatic test. The unions shall be subjected to hydrostatic pressure specified in 3.9.

4.6.3 Tension test. Unless otherwise specified (see 6.2), the unions shall be subjected to tension load to verify conformance to 3.10.3. This test shall be conducted by inserting solid bars corresponding to outside diameter of the pipe, threaded and screwed into each female threaded end of the union; and by screwing male threaded ends unto a suitable tapped block which is arranged for anchorage in the testing machine.

4.7 Packaging inspection. The preservation, packing, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. The unions shall be preserved in accordance with the applicable level A requirements of MIL-V-3.

5.1.2 Level Commercial. The unions shall be preserved in accordance with requirements of ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2.)

5.2.1 Level A. The unions shall be packed in accordance with the applicable level A requirements of MIL-V-3.

5.2.2 Level B. The unions shall be packed in accordance with the applicable level B requirements of MIL-V-3.

5.2.3 Commercial. The unions shall be packed in a manner that will insure arrival at destination in satisfactory condition and be acceptable at lowest rates to the carrier. Containers and packing shall comply with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. In addition to any special marking required by the contract, interior packages and shipping containers shall be marked in accordance with MIL STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

6.1 Intended use. Unions covered by this specification are suitable for use on systems involving high pressure saturated or superheated steam, hot or cold water, hot or cold noncorrosive oil, gas, air, or other fluids.


6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Part or Identifying Number (PIN) required (see 1.2.1, 1.2.1.1, 3.7, 3.9, 3.10.1, 3.13, and 6.3).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. If insert seats should be used (see 3.8.1.2.1).
e. If tension test is other than specified (4.6.3).
f. Level of preservation and level of packing required (see 5.1 and 5.2).

6.3 Part or identifying number (PIN). The part or identifying number is a definitive part number which corresponds to the class, style, and size of unions covered by this specification and defines the requirements of the options presented under this specification. The Military specification code number; the class, style, size, and coupling nut code number and the surface finish code letter are combined to form the definitive Military specification part number.

6.4 Modified Acme coupling nut threads. Modified Acme threads are used on application where a quick make and break joint are desired (see 3.10.1.)

6.5 Part or Identifying Number (PIN). PIN's were developed to identify items covered by this specification for cataloging purposes. The PIN consists of this specification identifier (M18182) and the PIN code number (see 1.2.1).

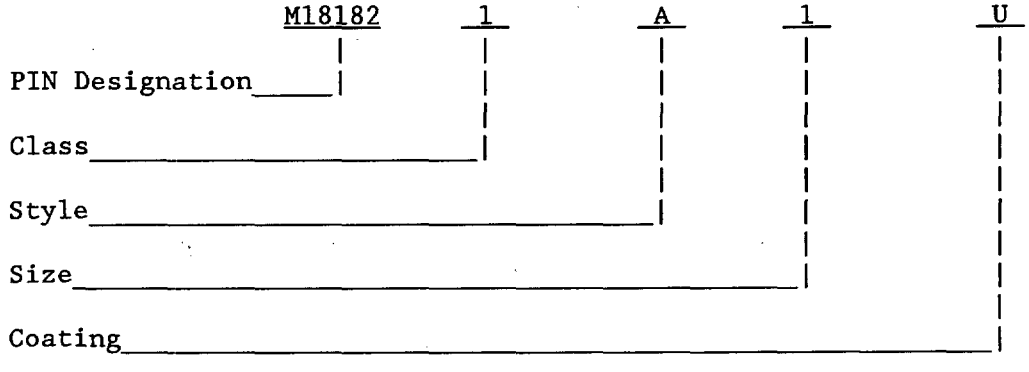

The above mentioned is a 2,000 lb/in^2, 0.125 inch union which has female threads on both ends and is uncoated.

6.6 Contract data requirements. When this specification is used in a procurement which incorporated a DD Form 1423 and invokes the provisions of paragraph 252.227-7031, Data Requirements of the DoD Federal Acquisition Regulation (FAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

the Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of FAR 252.227-7031 are not invoked, the data shall be delivered in accordance with the contract requirements.

6.7 Subject term (key word) listing.

adaptable
coupling
ends
joint
seat

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review Activity:
DLA - CS
Air Force - 82

User Activity:
Army - CE

Preparing Activity:
Navy - YD

(Project 4730-0030)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE *(YYMMDD)*
3. DOCUMENT TITLE		
4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*		
5. REASON FOR RECOMMENDATION		

6. SUBMITTER		
a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY	
a. NAME	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON
c. ADDRESS *(Include Zip Code)*	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:05Z
Check the source to verify that this is the current version before use.