NOT MEASUREMENT SENSITIVE

MIL-DTL-14639/11G
1 October 1998
SUPERSEDING
MIL-DTL-14639/11F
29 January 1996

DETAIL SPECIFICATION SHEET

INSIGNIA, GRADE, SPECIALIST 4 (SP-4), ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-14639 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

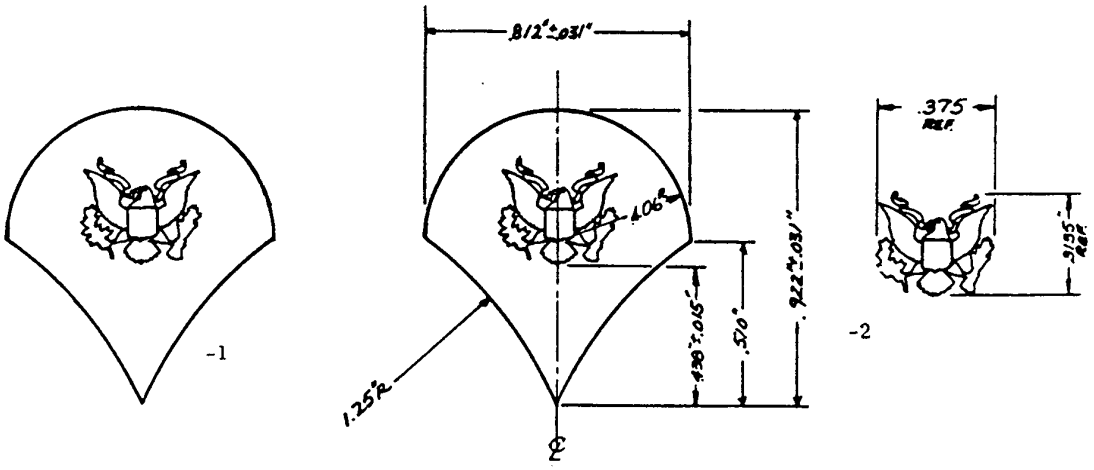

DASH NO.
-1: Subdued
-2: Bright

MATERIAL:
-1: Red Brass, Yellow Brass, or Zinc Aluminum
-2: Red Brass

FINISH:
-1: Baked Flat Black Enamel
-2: Mirror-like Polished and shall match TIOH Metal Finish Chip Number 1.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:59Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

-1: HEIGHT (Overall): 15/16 inch (2.38 cm)
WIDTH (Overall): 13/16 inch (2.06 cm)
THICKNESS: 0.055 inch ± 0.005 inch (0.139 cm ± 0.012 cm)

-2: BASE: as shown
THICKNESS: 0.055 inch ± 0.005 inch (0.139 cm ± 0.012 cm)
DEVICE (EAGLE): as shown
THICKNESS: 0.062 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

-1 and –2: THICKNESS ASSEMBLED (Thickest Part): 0.120 inch ± 0.010 inch (0.304 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. The prongs shall be located on a horizontal line 5/8 inch ± 1/16 inch (1.59 cm ± 0.16 cm) above the lowest point of the insignia, equidistant from each side and 11/16 inch ± 1/64 inch (1.75 cm ± 0.16 cm) apart.

3. Dash No. -2 device shall be located on the vertical center line in the position shown.

4. Dash No. -2 device shall be secured to the base by means of two brass rivets 0.050 inch ± 0.005 inch (0.127 cm ± 0.012 cm) in diameter and of sufficient length to ensure peening.

5. The baked flat black enamel for Dash No. -1 shall match FED-STD-595, Chip No. 37038.

6. At the option of the manufacturer for commercial sale only, insignia may be manufactured using 22 karat gold plate with a mirror-like polished finish and nickel underplating which shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activities:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0956)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:59Z
Check the source to verify that this is the current version before use.