NOT MEASUREMENT SENSITIVE

MIL-I-14639/6E
31 August 1993
SUPERSEDING
MIL-I-14639/6D
15 July 1992

MILITARY SPECIFICATION SHEET

INSIGNIA, GRADE, PLATOON SERGEANT (E-7) OR SERGEANT FIRST CLASS (E-7), ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I 14639.

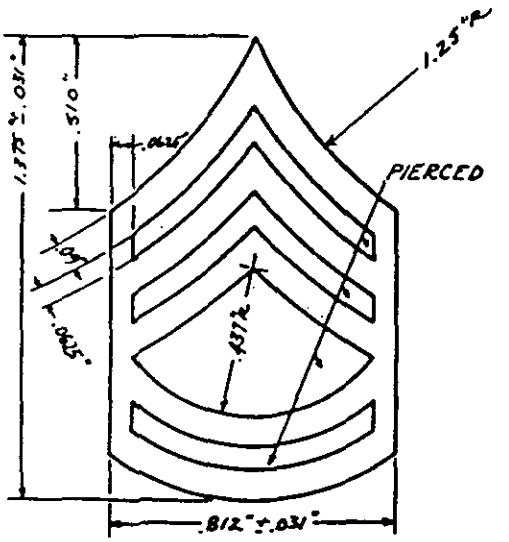

DASH NO.
-1: Subdued
-2: Bright

MATERIAL:
-1: Red Brass, Yellow Brass or Zinc Aluminum (as applicable)
-2: Red Brass

FINISH:
-1: Baked flat black enamel
-2: Mirror-like polished and shall match TIOH Metal Finish Chip Number 1.

DIMENSIONS: As shown

THICKNESS: 0.055 inch ± 0.005 inch (0.139 cm ± 0.12 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:57Z
Check the source to verify that this is the current version before use.

NOTES:

1. The prongs shall be located on a horizontal line 1/2 inch ± 1/16 inch (1.27 cm ± 0.16 cm) above the lowest point of the insignia, equidistant from each side and 11/16 inch ± 1/64 inch (1.75 cm ± 0.16 cm) apart.

2. The baked flat black enamel for Dash No. -1 shall match FED-STD-595, Chip No. 37038.

3. At the option of the manufacturer for commercial sale only, insignia may be manufactured using 22 karat gold plate with a mirror-like polished finish and nickel underplating which shall match TIOH Metal Finish Chip Number 9.

Custodian:
Army - IH

Preparing activities:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0727)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:57Z
Check the source to verify that this is the current version before use.