GG-B-2043
December 8, 1977

FEDERAL SPECIFICATION

BRUSH, SURGICAL SCRUB

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type and two styles of surgical scrub brushes.

1.2 Classification. The brushes shall be of the following styles as specified (see 6.2):

Style A - Rectangular shape handle.
Style B - U-Shape handle.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

Federal Specifications:

PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-585	- Boxes, Wood, Wirebound.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-676	- Boxes, Setup.

Federal Standards:

Fed. Std. No. 123	- Marking for Shipment (Civil Agencies).
Fed. Test Method Std. No. 151	- Metal, Test Methods.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston; New York; Washington, DC; Atlanta; Chicago; Kansas City, MO; Fort Worth; Denver; San Francisco; Los Angeles; and Seattle.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of Military Specifications, Standards, and Drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposals shall apply.

American Iron and Steel Institute (AISI).

AISI Steel Products Manual - Stainless and Heat Resistant Steels.

(Application for copies should be addressed to the American Iron and Steel Institute, 1000 16th Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified in the procurement document, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.1.2.1 and 6.2).

3.2 Materials.

3.2.1 Corrosion resistant steel. Corrosion resistant steel shall be AISI type 300 series in accordance with the AISI Steel Products Manual.

3.2.2 Nickel silver. Copper-nickel-zinc alloy (nickel silver) shall have the following chemical composition: copper (Cu) 63.0 to 68.5 percent; nickel (Ni) 9.0 to 19.5 percent; lead (Pb) 0.10 percent maximum.

3.3 Style, design and construction. Each scrub brush shall consist of a block, bristles, and anchor pins. No permanent deformation, loss of bristles, cracking, or discoloration shall result from the test specified in 4.4.2. Bristles, and anchor pins, shall not pull out when tested as specified in 4.4.3.

3.3.1 Block. Each block shall be strong, one-piece construction formed from either nylon or polypropylene. The block shall be white in color. The sides of the block shall be vertically serrated to provide a firm grip. Alternately, the serrations may be deleted from the center of each side of the block for a maximum length of 1-1/4 inches. All edges of the block shall be rounded and the block shall have a smooth bright finish.

3.3.1.1 Style A. The block for the Style A brush shall be solid or hollow and dimensioned as shown in figure 1.


3.3.1.2 Style B. The block for the Style B brush shall be channel or U-shaped and dimensioned as shown in figure 2.

3.3.2 Bristles. The bristles shall be fabricated from black nylon and each bristle shall be 0.010 ± 0.001 inch in diameter. The bristled face of the brush shall consist of seven horizontal rows of sixteen tufts per row. Each tuft shall consist of at least fifty-four bristles and shall be securely embedded 1/8 inch ± 1/64 inch deep in the block with an anchor pin. The height of the bristles, when set in the block, shall be as shown in figure 1. The variation in the heights of tufts of any one brush shall be no greater than 1/32 inch. Each tuft of bristles shall be trimmed to a tapered or chisel end. Bristles shall be crimped.

3.3.3 Anchor pin. The anchor pins shall be fabricated from corrosion resistant steel or nickel silver alloy flat or round wire. Round wire shall have a minimum diameter of 0.020 inch. Flat wire shall have a minimum cross sectional area of 0.000314 square inch. When tested as specified in 4.4.1, the material shall be in accordance with 3.2.1 or 3.2.2.

3.4 Identification marking. The name or registered trademark of the manufacturer shall be [illegible] on the block of each brush

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

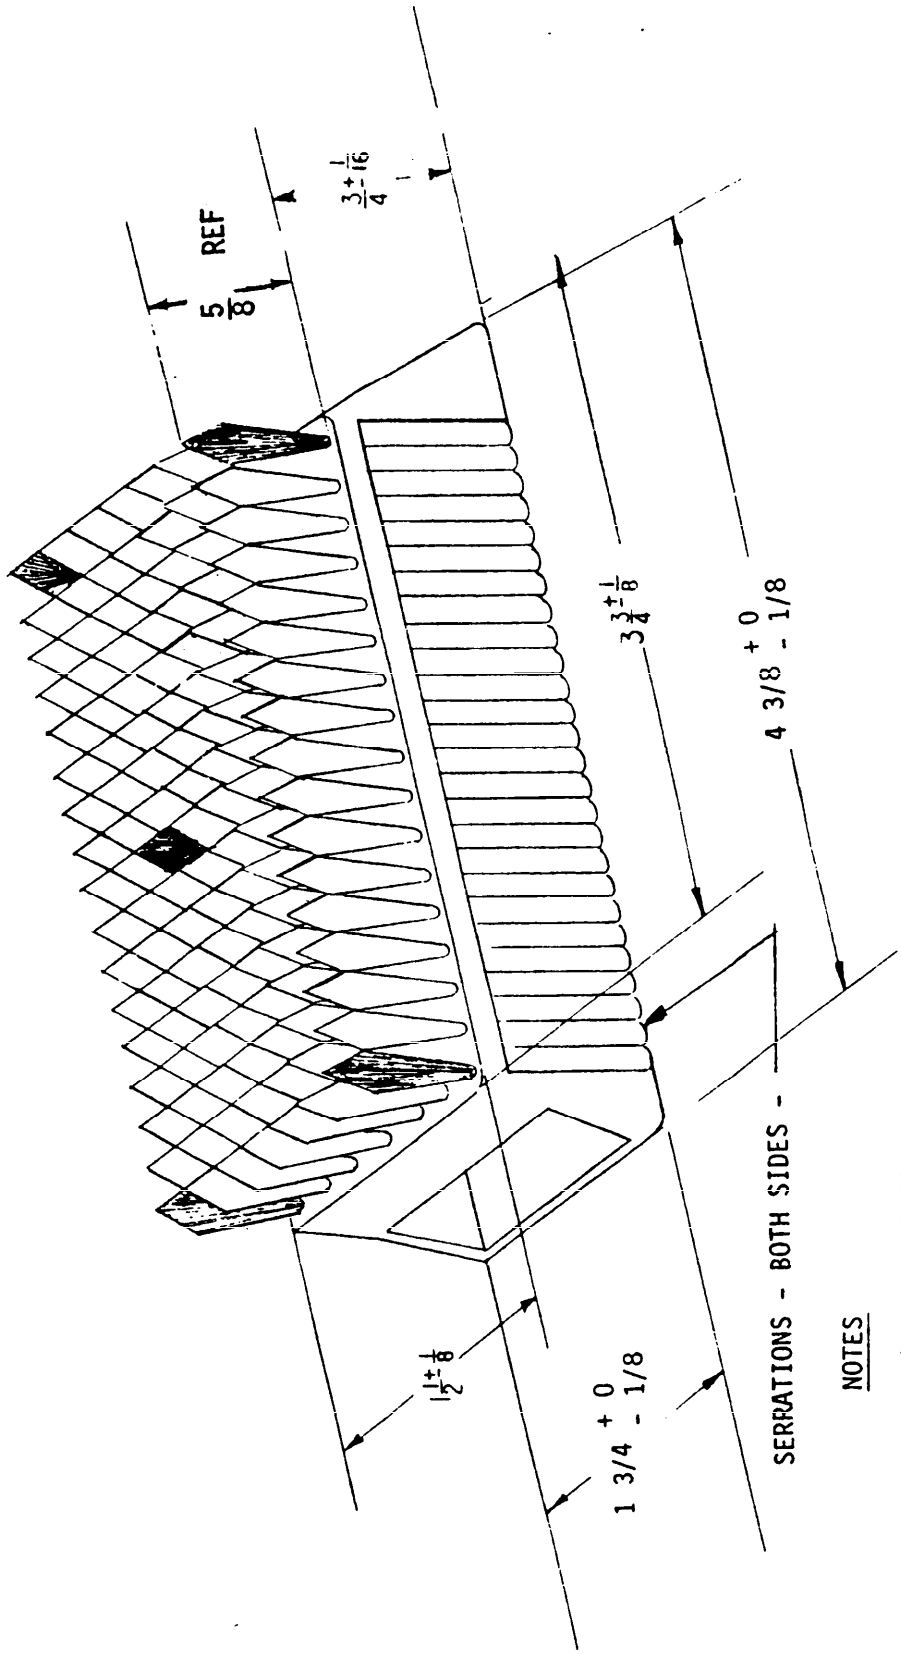


NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. NUMBER AND STYLE OF BRISTLES ARE FOR ILLUSTRATION ONLY.
3. SEE BODY OF THIS SPECIFICATION FOR REQUIREMENTS.

FIGURE 1. Brush, Surgical Scrub - Style A.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:54Z
Check the source to verify that this is the current version before use.

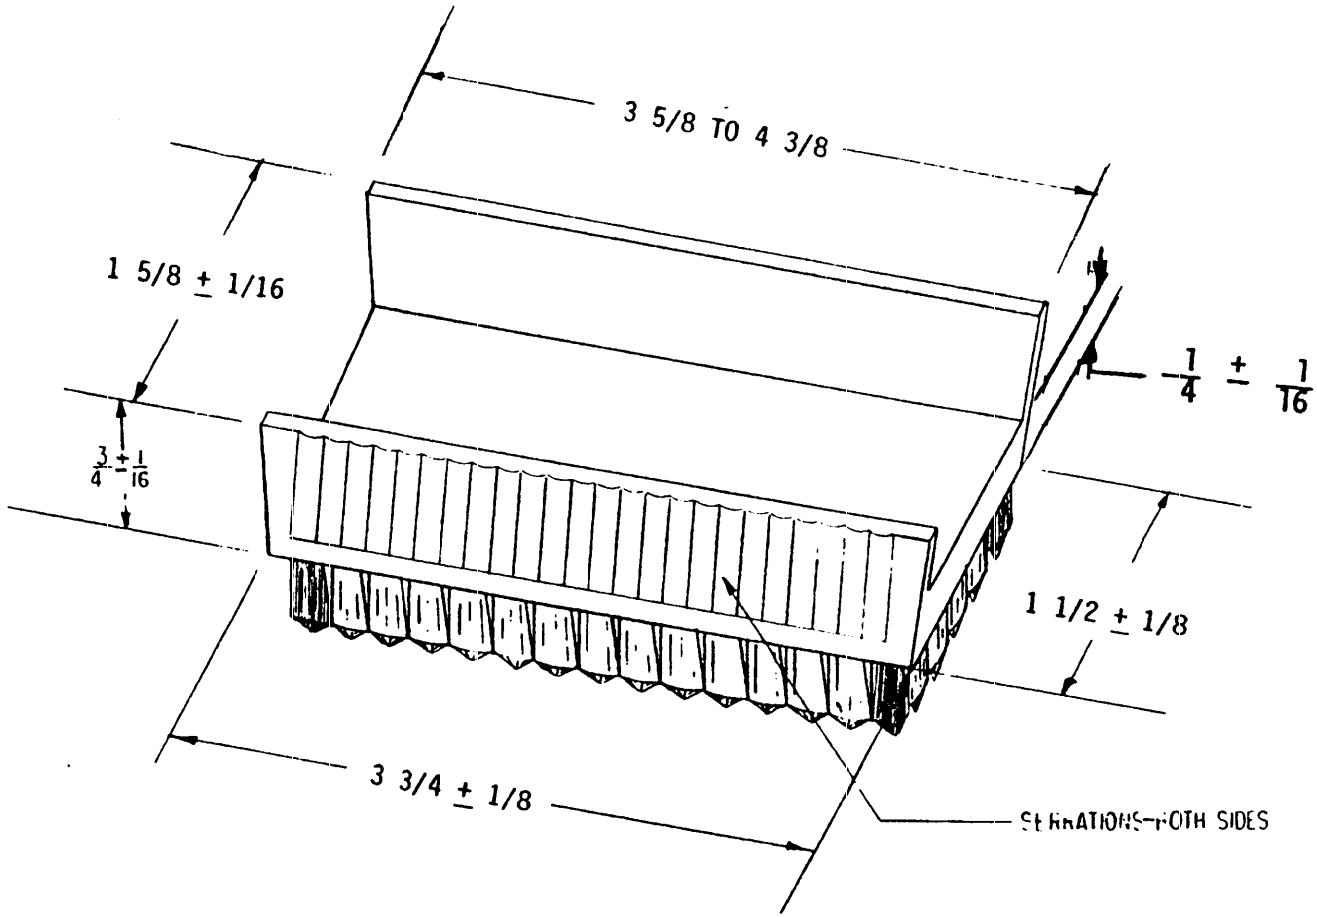

NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. NUMBER AND STYLE OF BRISTLES ARE FOR ILLUSTRATION ONLY.
3. SEE BODY OF THIS SPECIFICATION FOR REQUIREMENTS.

FIGURE 2. Brush, Surgical Scrub - Style B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. Workmanship shall be first class throughout. Item shall be free from defects which detract from its appearance or impair its serviceability. All burrs and sharp edges shall be removed from the item.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determinatio by technical means of physical and chemical properties) of the item.

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

4.1.2.1.1 First article inspection. First article inspection shall be performed on brushes when a first article sample is required (see 3.1). This inspection shall include examination of 4.3 and tests of 4.4.

4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.3 and tests of 4.4.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and table I. The unit of product for sampling purposes shall be one brush.

TABLE I. Sampling for examination.

	Inspection level	AQL (percent defective
For visual examination		
Major defects	II	1.0
Minor defects	II	4.0
For dimensional examination	S-1	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table II. The unit of product for test purposes shall be one brush.

TABLE II. Sampling for tests.

Characteristic	Require-ment	Test procedure	Inspection level	AQL (percent defective)
Heat Resistance	3.3	4.4.2	S-2	2.5
Pull Test	3.3	4.4.3	S-2	2.5

4.2.3 Metals. Four ounces of each lot of each metal used in the manufacture of the anchor pins shall be selected for chemical analysis in accordance with 4.4.1.

4.3 Examination.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in table III. Examination shall not be restricted to the classified possible defects listed below.

TABLE III. Classification of defects.

Categories	Defects
Major	
101	Brush handle not molded in one-piece.
102	Sides of block not vertically serrated to provide a firm grip.
103	Block not chamfered or rounded on all edges.
104	Bristled face does not consist of seven horizontal rows of 16 bristle tufts each, or rows not uniform.
105	Bristles are not black.
106	Each row of tufts not trimmed to a tapered or chisel end.
107	Bristles not securely anchored in the block.
Minor	
201	Block finish not smooth or bright.
202	Block or bristles not clean.
203	Identification marking missing, incomplete or illegible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

4.3.2 Dimensional examination. The brushes shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.3.3 Examination of preparation for delivery. The examination of the packaging, packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Chemical analysis. Each lot of each metal shall be tested for chemical analysis in accordance with method 111 or method 112 of Fed. Test Method Std. No. 151.

4.4.2 Heat resistance. The brushes shall be autoclaved at 250°F (121°C) for five periods of thirty minutes each and then at 270°F (132°C) for five periods of ten minutes each. After each autoclaving period, the brushes shall be removed from the autoclave, allowed to dry at room temperature for one hour and examine for compliance with the applicable requirements of 3.3.

4.4.3 Pull test. The tuft of bristles shall be grasped and pulled with a minimum force of five pounds. The test shall be performed on five tufts on the brush, one tuft at each corner and one tuft near the center of the bristle face. The bristles and anchor pins shall then be examined for compliance with the applicable requirements of 3.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit package. Each brush shall be packaged in a box of appropriate size and design constructed in accordance with PPP-B-566 or PPP-B-676. Closure of box shall be as specified in the appendix of the applicable box specification.

5.1.1.2 Intermediate package. Twelve (12) brushes of style A or B shall be packaged in a box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Closure of box shall be as specified in the appendix of PPP-B-636.

5.1.2 Level C. Brushes shall be packaged in a manner that will afford adequate protection against corrosion, deterioration and physical damage during shipment from supply source to the first receiving activity.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:54Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be leve A, B or C as specified (see 6.2).

5.2.1 Level A. Two hundred eighty-eight (288) brushes of styles A or B shall be packed in an exterior container designed for a type 2 load constructed in accordance with PPP-B-585, class 3 style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof as specified in the appendix of PPP-B-636.

5.2.2 Level B. Two hundred eighty-eight (288) brushes of styles A or B shall be packed in an exterior container designed for a type 2 load constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, type CF, class domestic. Closure of box shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. The packaged brushes shall be packed in shipping containers in a manner that will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity. These packs shall conform to the applicable carrier's rules and regulations.

5.3 Marking.

5.3.1 Civil agencies. Marking for shipment shall be in accordance with Fed. Std. No. 123.

5.3.2 Military activities. Each unit, intermediate package and exterior container shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Intended use. The brushes are intended for surgical scrubbing of hands, nails and arms and are also suitable for dispensing from National Stock Number 7920-00-165-7149, Dispenser, Scrub brush.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

a. Title, number and date of this specification.
b. National stock number (NSN).
c. Style required (see 1.2).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When a first article is required (see 3.1, 4.1.2.1 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article is required, it shall be tested under the appropriate provisions of the Armed Services Procurement Regulations. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 This specification covers the following item(s) appearing in the Federal Supply Catalog:

National Stock Number	Item Identification	Style
6530-00-772-5935	BRUSH, SURGICAL SCRUB	A
6530-00-044-4820	BRUSH, SURGICAL SCRUB, U-Shape Handle.	B

6.5 Supersession data. This specification includes the requirements of MIL-B-36143B (DSA-DM) dated 1 March 1971 and H-B-1490/2 dated October 17, 1973.

MILITARY CUSTODIANS:
Army - MD
Navy - MS
Air Force - 03

Review activity:
DOD - MB

Preparing activity:
DLA-DM

Civil Agency Coordinating Activities:
GSA-FSS
HEW-NIH

Project No. 6530-1433

Orders for this publication are to be placed with General Services Administration, acting as agent for the Superintendent of Documents. See Section 2 of this specification to obtain copies of documents referenced herein. Price 70 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

GG-B-2043 BRUSH, SURGICAL SCRUB

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

POSTAGE AND FEES PAID

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:54Z
Check the source to verify that this is the current version before use.