HH-G-450D
February 11, 1972
SUPERSEDING
Fed. Spec. HH-G-450C
October 16, 1968

FEDERAL SPECIFICATION

GLOVES, CLOTH (ASBESTOS)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers two types of asbestos gloves.

1.2 Classification.

1.2.1 Types and classes. Asbestos gloves covered by this specification shall be furnished in the following types and classes, as specified (see 6.2).

Type I - Lined.

Class 1 - Without gauntlet, 11-inch length.
Class 2 - With gauntlet, 14-inch length. 1/

Type II - Unlined, with leather palm, 14-inch length.

1/ Only type I, class 2 gloves shall be in two sizes, large and medium.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276	-	Thread, Cotton.
KK-L-162	-	Leather, Cattlehide, Chrome-Tanned, for Gloves, Garments, and Equipage.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
DDD-L-20	-	Label; for Clothing, Equipage, and Tentage (General Use).

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 191 - Textile Test Methods.
Fed. Std. No. 311 - Leather; Methods of Sampling and Testing.
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-C-10316 - Cloth, Asbestos.
MIL-B-17757 - Boxes, Fiberboard, Corrugated (Modular Sizes).

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification might appear in the sample, in which case this specification shall govern.

3.2 Materials.

3.2.1 Asbestos cloth. The asbestos cloth shall conform to class 1, grade UG, industrial designation 40P10 or 40H14 of MIL-C-10316.

3.2.2 Napped lining for type I. Type I gloves shall be fully lined with a napped woven cloth made from unbleached carded cotton yarns. The face of the cloth shall be brushed or napped to give a fleeced effect. The weight of the cloth shall be not less than 8.0 ounces per square yard when tested as specified in 4.2.1.

3.2.3 Thread. All thread for stitching and seaming shall be unbleached cotton thread conforming to V-T-276. The thread for sewing the gloves and for stitching the leather to asbestos cloth shall be type IA1 or IB1, ticket No. 12, 4-ply, and for stitching the lining, ticket No. 30, 3-ply.

3.2.4 Leather for type II. The leather for type II gloves shall be flesh split cattlehide conforming to type IV of KK-L-162 except that elongation requirements do not apply.

3.2.4.1 Color. The color of all leather components shall be light (pearl) gray. All leather components used in each pair of gloves shall be matched shades of light (pearl) gray.

3.2.4.2 Thickness. The thickness of the leather shall be not less than 3 ounces nor more than 3-1/2 ounces when measured as specified in 4.2.2.2. (Note: One ounce equals 1/64 inch.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:55Z
Check the source to verify that this is the current version before use.

3.2.5 Identification label. Identification labels shall measure not less than 3 by 1-1/2 inches and shall conform to type I, class 5 of DDD-L-20. The item description for use on the label shall be: Gloves, Cloth Asbestos, (type I, or II, as applicable). The label shall be centered on the outside (palm side) of the gauntlet of type II glove and on the lining of type I glove approximately 1/2 inch below glove opening and stitched on four sides using seam type SSa-1.

3.3 Design. The gloves shall be fabricated of asbestos cloth, cut over a Clute pattern, four fingers and thumb design, having one-piece palm including the fronts of all four fingers and the side and back of index finger. The back side of the fourth finger may be continuous with the piece forming the palm, or may be fourchette. There shall be two fourchettes if the fourth finger is continuous with palm, or three fourchettes if not. The underside of the thumb shall be a continuous part of the palm. A separate piece shall form the top side of the thumb. The cuff or gauntlet may be a continuous part of the glove or cut separately. Type I shall be fully lined. Type II shall be unlined, with a leather patch across the palm extending under the thumb (see fig. 1).

3.3.1 Patterns. The dies or patterns for cutting all parts of the gloves shall be furnished by the supplier and shall be of proper proportions to provide gloves conforming to finished measurements in table I.

3.4 Figure. Figure 1 is furnished for information purposes. To the extent of any inconsistencies between the written specification and the illustrations, the written specification shall govern.

3.5 Stitches, seams and stitchings. Stitches, seams, and stitchings shall conform to Fed. Std. No. 751. Stitch type 301 shall be used for all stitching except that stitch type 401 may be used as an alternate for stitching the lining. All seams shall be seam types SSa-1 and SSa-2 as applicable, except that seam type SSc-1 shall be used for hemming type I gloves and seam type EFa-1 for hemming type II gloves. Stitching shall be done with not less than 6 nor more than 8 stitches per inch. Thread breaks or any end of 301 stitching not caught in other seams or stitching, shall be backstitched not less than 3/8 inch. Stitching produced with 401 stitch type when not caught in other seams or stitching shall have not less than 1/2 inch chain extending beyond each end. All thread ends shall be trimmed.

3.6 Construction.

3.6.1 Cutting. The gloves and glove parts shall be cut lengthwise in warp direction of the asbestos cloth and cotton lining.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.

3.6.2 Thumbing, fourchettes, and closing of the asbestos parts. Thumbing, fourchettes and closing shall be inseam sewn with either a single or double row of stitches. When a single row of stitches is used, the stitches shall be 1/4 to 1/2 inch from the edge. When two rows of stitches are used, the first row shall be 1/4 to 3/8 inch from the edge and the second row shall be 1/16 to 1/8 inch from the first row.

3.6.3 Gloves, lined (type I).

3.6.3.1 Lining. The lining shall be fully outseamed (SSa-1 seam type) with 1/8 ± 1/16 inch gage stitching, inserted in the glove and then securely attached at tips of fingers and thumb and by a turned seam (SSc-1 seam type) where the lining is joined to the top edge of the cuff. The lining shall fit close to the asbestos shell to avoid all bunching or wrinkling of the lining cloth. The lining shall have the fleece or napped side against the hand.

3.6.3.2 Hemming. The top of the gauntlet or cuff portion of the asbestos cloth and the napped lining shall be hemmed by turning in both cloths not less than 1/2 inch and stitching through both cloths not more than 3/8 inch down from top of the gauntlet or cuff.

3.6.4 Gloves, unlined, leather (type II).

3.6.4.1 Leather reinforcement palm patch. The reinforcement palm patch shall extend the entire width of the palm, starting not more than 1/2 inch below finger crotches and extending upwards towards the wrist for not less than 3-3/4 inches, and fully cover the underside of the thumb. The reinforcement palm patch shall be stitched to the palm and edges of thumb section and shall be caught in thumb seam. An additional leather partial patch shall be sewn in the back of the thumb as shown in figure 1.

3.6.4.2 Hemming. The top of gauntlet shall be turned in not less than 1/2 inch and stitched not more than 3/8 inch down from the top of the gauntlet.

3.7 Pairing. The gloves shall be matched, paired and tacked together with thread, 1/2 to 1 inch from the finished top, at the closing seam of gauntlet. Tacking shall be done with not less than two stitches using a ply thread which will permit the gloves to be pulled apart without tearing the cloth. As an alternate each pair of gloves may be tacked with a non-corrosive soft metal staple provided the gloves can be separated without damaging the cloth.

3.8 Measurements. The measurements of the finished glove shall conform to table I. The measurements shall be made with glove laid out flat with no tension.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:55Z
Check the source to verify that this is the currentversion before use.

TABLE I. Measurements of finished gloves

Location	Type I class 1, (inches)	Type I, class 2 (inches)		Type II (inches)	Tolerance, (inch)
		Large	Medium		
(a) Overall length (tip of 2nd finger to top of cuff)	11	14	14	14	± 1/2
(b) Width across palm at thumb crotch	6-1/2	6-1/2	5-1/2	6-1/2	± 1/4
(c) Width across cuff at opening	6-3/4	6-3/4	6	6-3/4	± 1/4
(d) Length of thumb (tip of crotch)	3	3	2-7/8	3	± 1/4
(e) Length of first finger (tip to thumb crotch)	5	5	4	5	± 1/4

3.9 Workmanship. The finished gloves shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter. In addition to sampling inspection of MIL-STD-105, process inspection shall be performed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.

during manufacture of the gloves to see that proper materials are being used and to determine compliance with all required operations and processes which cannot be determined in the completely fabricated glove. The Government reserves the right to exclude from consideration for acceptance any material or services for which inprocess inspection has indicated nonconformance.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on components as specified in 4.2.1.1 and table II.

4.2.1.1 Testing of napped lining. The sample unit for testing of the napped lining component shall be 1/4 yard full width of the cloth. The sample size (number of sample units) shall be specified in the table below. The lot size shall be expressed in units of 1 yard each. The lot shall be unacceptable if one or more sample units fail to meet any requirement specified in table II.

Lot size	Sample size (sample units)
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE II. Component tests

Component	Characteristics	Requirement paragraph	Test method
Napped lining (type I glove)	Material Identification	3.2.2	1200 of Fed. Std. No. 191
	Weight of cloth	3.2.2	5041 of Fed. Std. No. 191

4.2.2 Examination of the end item. The defects found during examination of the end product shall be classified in accordance with 4.2.2.1 and 4.2.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.2.2.3. The lot size shall be expressed in units of one glove. The sample unit shall be one completely fabricated glove and the selection shall be by pairs. Each defect found during the examination for pairing shall be scored as a single defect.

4.2.2.1 Visual examination. The gloves shall be examined for defects in pairing, color, design, material, workmanship, construction and marking.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:55Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Pairing	Definite variation in color.		X
	Gloves not properly mated, i.e., two rights or two lefts submitted as pair.	X	
	Not tacked together or not as specified.		X
Color (applicable to all components)	Not as specified or approved color.		X
Cleanliness	Any spot or stain.		X
Design	Any characteristic not in accordance with specified requirements (unless otherwise classified herein).	X	
Material (general)	Any component not fabricated of specified material.	X	
Asbestos cloth	Any cut, hole, tear, or mend.	X	
	Any weakened area due to weave deficiencies that can be expected to develop into a hole.	X	
	Any cloth defect affecting serviceability but not seriously, i.e., mispicks or slubs.		X
	Any cloth defect affecting serviceability.	X	
Napped lining (type I gloves)	Any cut, hole, tear, or mend.	X	
	Slubby yarn, or other type weave defect in material.		X
	Lining not napped or area of no nap.		X
Leather (type II glove)	Not split cattlehide leather.		X
	Loose, spongy, flanky, open cut or open scratch:		
	- Seriously affecting serviceability.	X	
	- Affecting serviceability, but not seriously.		X
	Open vein:		
	- Seriously affecting serviceability.	X	
	- Affecting serviceability, but not seriously.		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:55Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Leather (type II glove) (cont'd)	Any hole (except pinholes), cut or tear	X	
	Three or more pinholes in a glove.		X
	Not soft or pliable.	X	
	Any scar, bony area, or abraded area:		
	- Seriously affecting serviceability.	X	
	- Affecting serviceability, but not seriously.		X
Construction and workmanship applicable to all components and assemblies unless otherwise indicated herein	Any component missing.	X	
	Any component misplaced, operation omitted or not properly performed, seriously affecting serviceability e.g., fingers twisted or distorted.	X	
	Any component misplaced, operation omitted or not properly performed, affecting serviceability, but not seriously.		X
	Needle chews.	X	
	Not assembled as specified.	X	
	Any component not securely attached, seriously affecting serviceability.	X	
	Any component not securely attached affecting serviceability but not seriously.		X
	Not specified seam or stitch type.	X	
Seams and stitching	Any row of stitching omitted.	X	
	Any open seam.	(see note)	
NOTE:	When one or more stitches are broken or two or more consecutive skipped stitches or runoffs occur on a single stitched seam or on both rows of stitching on a double stitched seam, it shall be classified a major defect. When one or more stitches are broken or two or more consecutive skipped stitches or runoffs occur on only one row of a double stitched seam, it shall be classified as a minor defect.		
	Loose stitch tension resulting in a loosely secured seam.	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:55Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Seams and stitching (cont'd)	Tight stitch tension resulting in cutting of cloth or leather, or breaking of stitches when normal pull is applied.	X	
	Thread breaks backstitched less than 3/8 inch.		X
	Ends of 301 stitching not backstitched or backstitched less than 3/8 inch when not caught in another row of stitching.		X
	End of 401 stitching when not caught in other seam or stitching:		
	- chain does not extend beyond each end.	X	
	- chain extends beyond each end but less than 1/2 inch.		X
	Any part caught in unrelated row of stitching.	X	
	One stitch per inch less than specified.		X
	Two or more stitches per inch less than specified.	X	
	More than the specified maximum number of stitches per inch resulting in damage to assembly.	X	
	Gage or margin of stitching irregularly accomplished, seriously affecting serviceability.	X	
	Gage or margin of stitching irregularly accomplished, affecting serviceability but not seriously.		X
	Puckering or pleating seriously affecting serviceability.	X	
	Puckering or pleating affecting serviceability but not seriously.		X
Assembly detail	Any part malformed seriously affecting serviceability.	X	
	Any part malformed affecting serviceability but not seriously.		X
	Any part of assembly not firmly or properly affixed causing discomfort to user, e.g., lining seriously wrinkled or excessive bulk in crotch or fingers, etc.	X	
	Thread ends not trimmed throughout item.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Label (marking)	Missing, incomplete, incorrect, illegible, not specified type or size, not in proper location or not accomplished in the specified manner.		X

4.2.2.2 Dimensional examination. The gloves shall be examined for dimensional defects, including thickness of leather. Any dimension that is not within the established tolerance shall be classified a defect. Leather thickness shall be measured in accordance with method 1011 of Fed. Std. No. 311. The leather shall be separated from the asbestos cloth and pinched together so that two plies of leather shall be measured for thickness at one time. Half of the measurement found shall be the thickness of the leather.

4.2.2.3 Acceptable quality level (AQL) and inspection level. The inspection level and AQL expressed in defects per hundred units shall be as follows:

Examination	Inspection level	AQL	
		Major	Total
4.2.2.1, visual	II	2.5	6.5
4.2.2.2, dimensional	S-3	-	4.0

4.2.3 Examination of preparation for delivery requirements. An examination shall be made to determine whether packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be level S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing. Any component not as specified. Any component damaged, affecting serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping or inadequate stapling. Bulged or distorted container.
Content	Number of gloves per container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. Twenty pairs of 11-inch length gloves or sixteen pairs of 14-inch length gloves of one type, class, and size only, shall be packed within a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, grade V2s, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. The gloves shall be packed on edge within a shipping container. The arrangement shall be fourteen pairs, with the glove length parallel to the end panels and against a side panel. The remaining pairs shall be placed in the unfilled space, with the glove length parallel to the side panels. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of the same type and class may be packed within the same shipping container.

5.1.2 Level B. Twenty pairs of 11-inch length gloves or sixteen pairs of 14-inch length gloves of one type, class, and size only, shall be packed within a fiberboard shipping container, assembled, and closed conforming to class domestic, grade 275, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety DW, grade 275 of MIL-B-17757. The gloves shall be packed on edge within a shipping container. The arrangement shall be fourteen pairs, with the glove length parallel to the end panels and against a side panel. The remaining pairs shall be placed in the unfilled space, with the glove length parallel to the side panels. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of the same type and class may be packed within the same shipping container.

5.1.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:55Z
Check the source to verify that this is the currentversion before use.

5.1.3 Level C. Gloves shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.2 Marking.

5.2.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military requirements. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.2.3 Labels, mixed sizes. Each shipping container, packed with mixed sizes of the same type and class, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The asbestos gloves covered by this specification are intended to be used by welders, steam fitters, and other workmen handling hot or cold tools or materials, to protect hands from heat or cold.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and sizes required (see 1.2).
(c) Selection of applicable levels of packing (see 5.1).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.1.2.1).

6.3 Samples. For access to guide sample, address the procuring activity issuing invitation for bids (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:55Z
Check the source to verify that this is the current version before use.

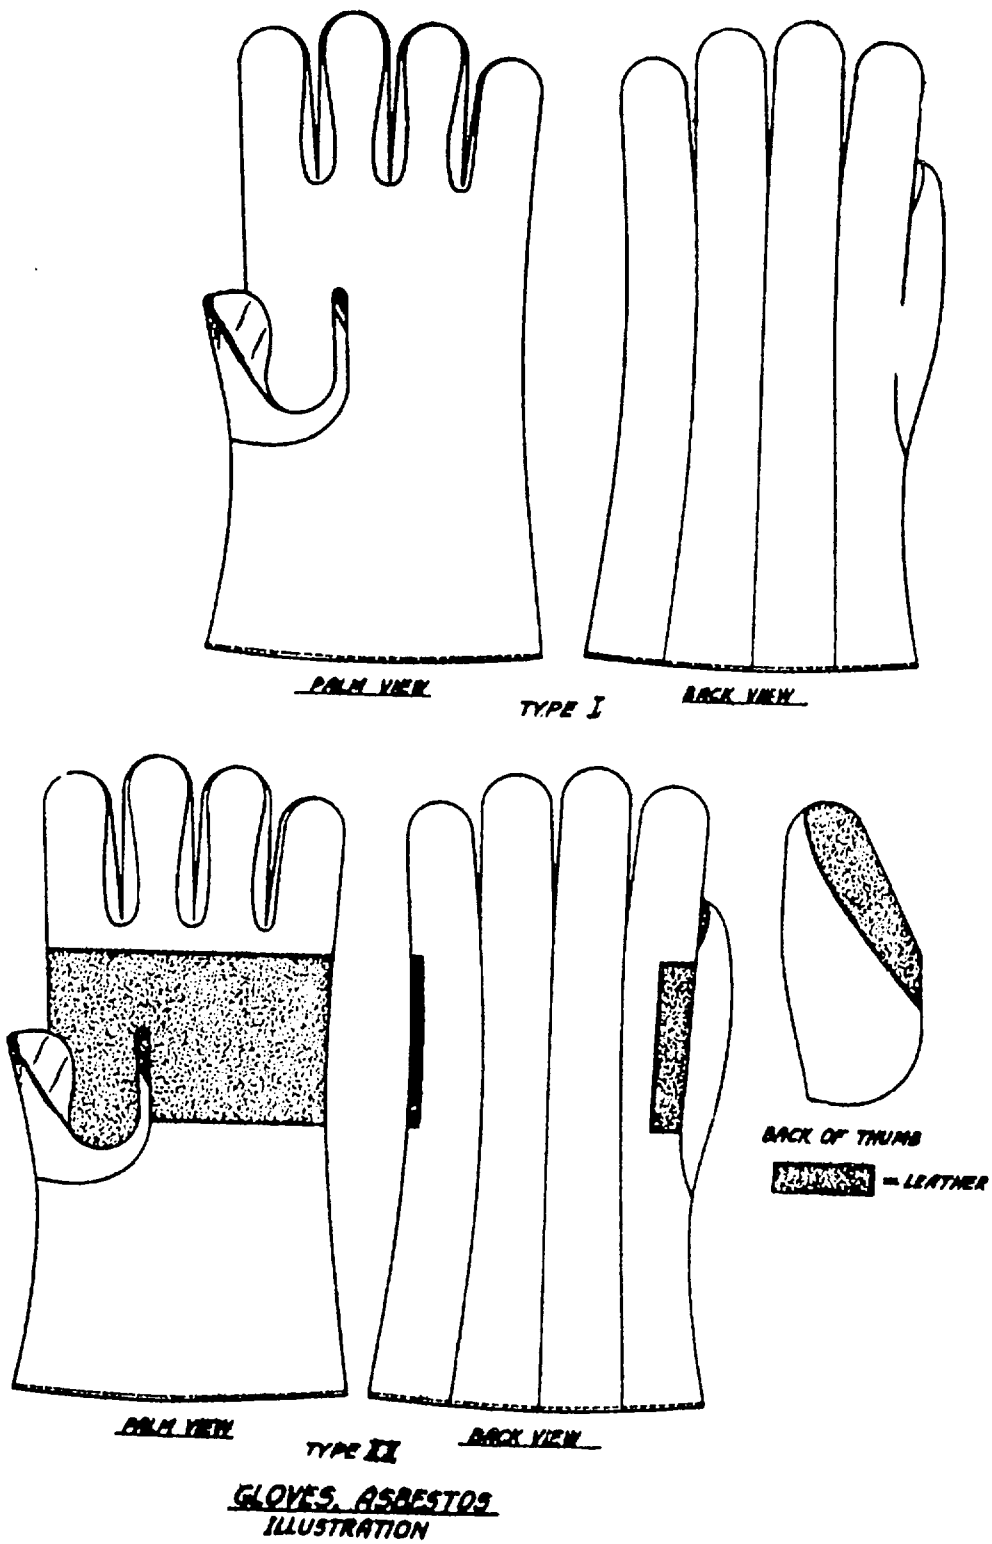


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:55Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 82

Review activities:

Army - MD
Navy - SH

User activities:

Navy - YD, MC

Preparing acitivity:

Army - GL

Civil Agency Coordinating Activities:

AEC
GSA - FSS
TVA

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:55Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
GLOVES, CLOTH (ASBESTOS) HH-G-450D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

U.S.MAIL

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:55Z
Check the source to verify that this is the current version before use.