A-A-1286A
May 16, 1988
SUPERSEDING
A-A-1286
May 16, 1984

COMMERCIAL ITEM DESCRIPTION

HAMMER, HAND, STONEWORKERS', MASONS'

The General Services Administration has authorized the use of this commercial item description in lieu of Type XI, Class 4, Federal Specification GGG-H-86.

SALIENT CHARACTERISTICS

The hammers shall conform to ANSI B173.3 and requirements stated herein.

Finish. Polished striking face/protective coating of the entire head to deter rusting.

Handle. Hickory, clear lacquered.

Hardness. The face and peen shall be hardened to not less than 44 nor more than 55 on the Rockwell C scale. The hardness test shall be conducted in accordance with ASTM E 18.

Eye number. The eye number and dimensions shall be as specified in figure 2.

Identification marking. Each hammer shall be etched or stamped in a permanent and legible manner with the manufacturer's name or identifying symbol of such known character that the source may be readily identifiable, and the country of origin.

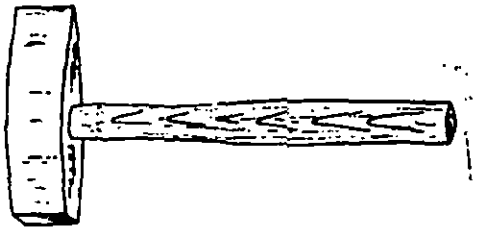


Figure 1.--Type XI, Class 4.




Figure 2.--Eye number.

(Figures are illustrative and not restrictive)

Head Weight	Handle Length Overall	National Stock Number
3 lbs. ± 5 ozs.	16 ± 1 inch	5120-00-224-4085

Testing:

Hammer/head alignment. The angle of the handle shall be no more than 2 degrees from the perpendicular when measured from the longitudinal centerline of the handle to a plane parallel to the top of the head.

In addition, the rotational variance around the longitudinal centerline of the handle shall be no more than 2 degrees when viewed from the butt end of the handle along the longitudinal centerline of the handle and when measured from the longitudinal centerline of the head to a line corresponding to the long dimension of the butt end of the handle.

DISTRIBUTION STATEMENT A. Approved for Public Release; Distribution is Unlimited.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Crack detection test. No hammer provided under this commercial item description shall exhibit any indication of cracks in the hammer head. All hammer heads shall be 100 percent in-process inspected after heat treating, prior to finishing and assembly and subjected to either a wet magnetic particle inspection test in accordance with ASTM E709-80 or an Ultrascopic detection test in accordance with ASTM E114.75. All surfaces shall be examined. Any hammer head exhibiting indications of cracks shall be rejected. Hammer heads with only surface crack indications may have the indications removed by minor rework and then retested as above.

Pull apart head/handle test. Each sample hammer shall be subjected to the tensile force test of ANSI B173.3.

Workmanship. All hammers shall be free from imperfections which may affect their safety, appearance, serviceability or durability.

QUALITY ASSURANCE PROVISIONS

Responsibility for inspection. Unless otherwise stated in the contract, the contractor is responsible for the performance of all inspections as specified herein. Except as stated otherwise in the contract, the contractor may use his own or any other facilities available for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform the inspections set forth in the commercial item description if deemed necessary to assure supplies and services conform to the prescribed requirements.

Sampling for inspection and testing. Sampling for inspection and testing shall be in accordance with MIL-STD-105 at the inspection levels and AQL's specified below. The lot shall consist of all hammers of the same nominal head weight presented for inspection at the same time. The sample unit shall be one hammer.

Visual and dimensional characteristics, and workmanship. The inspection level shall be S-4, with an AQL of 4.0 expressed in terms of percent defective.

Testing of the end item for hardness. The inspection level shall be S-3 with an AQL of 4.0 expressed in terms of percent defective.

Testing of the end item (all other tests). The inspection level shall be S-3 with an AQL of 4.0 expressed in terms of percent defective.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or purchase order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements.

ANSI standards are available from the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.

ASTM standards are available from the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Military standards are available from the Naval Publications and Forms Center, 5801 Tabor Ave., Philadelphia, PA 19120.

PREPARING ACTIVITY:

GSA - FSS

MILITARY INTEREST:

Custodian

Air Force - 99
Army - GL
Navy - SH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.