COMMERCIAL ITEM DESCRIPTION

WRENCH, BOX, DOUBLE HEAD, 12-POINT, HALF-MOON


The General Services Administration has authorized the use of this commercial item description in lieu of Federal Specification GGG-W-636.

This commercial item description covers wrenches suitable for use with hexagonal boltheads and nuts, assigned National Stock Numbers (NSN) as listed below.

Salient characteristics:

Material: Steel, Rockwell C hardness of 40 minimum, 55 maximum.
Finish: Chromium plated. A minimum of 180° of the outer periphery of the box ends (90° on each side of the longitudinal axis of the wrench) shall be bright and have a maximum roughness height value of 30 microinches (A.A.).
Marking: Marked in a plain and permanent manner with wrench opening size on the faces or on the handle as close to each head as practicable and with manufacturer's name or trademark.
Wrench opening: Sized to pass the gaging requirements of Federal Standard 346.
Chamfer: Chamfered on both sides on all points to provide a lead for the working surface.

National Stock Number	Wrench opening (distance across flats)		Outside diameter of head		Permitted eccentricity of box wrench opening to outside diameter	Thickness of head		Distance between centers of openings (minimum)
	Small head	Large head	Small head (max.)	Large head (max.)		Small head (max.)	Large head (max.)	
	Inch	Inch	Inches	Inches	Inch	Inch	Inch	Inches
5120-00-184-8631	7/16	1/2	0.695	0.775	0.015	3/8	3/8	4-7/8
5120-00-222-1596	9/16	5/8	0.868	0.946	0.018	13/32	7/16	5-11/16
5120-00-222-1597	5/8	3/4	0.946	1.125	0.018	7/16	35/64	6-7/16
5120-00-277-2682	11/16	3/4	1.025	1.125	0.018	33/64	35/64	6-3/4

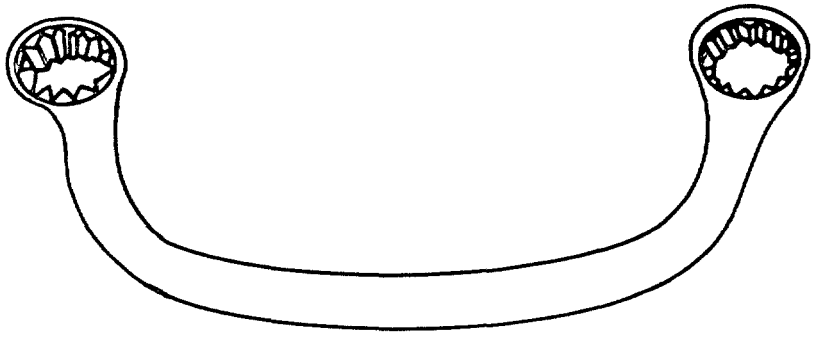

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Workmanship. Wrench shall be free from rust, burrs, fins, nodules, and other defects which may impair servicability, durability, or appearance. The edges and corners of the wrench shall be cleary defined and smoothly finished with no evidence of broaching tears on the working surface.

The issue of Federal Standard 346 in effect on the date of the solicitation shall be used to determine compliance with stated requirements.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Preservation, packaging, packing, and marking. Each wrench shall be preserved and packaged in accordance with normal commercial practice and packed to assure acceptance by common carrier and provide product protection against loss and damage during multiple shipments, handling and storage. The shipping container shall be in compliance with the National Motor Freight Classification and Uniform Freight Classification. Marking shall be as specified in the contract or order.

Federal Standards are available from General Services Administration, Specification Sales, Building 197 (Washington Navy Yard) Washington, DC 20407.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.