[INCH POUND]
A-A-1975B
April 24, 1997
SUPERSEDING
A-A-1975A
April 3, 1986

COMMERCIAL ITEM DESCRIPTION

DOWEL, WOOD

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description covers wooden dowel rods for general purpose use.

2. CLASSIFICATION

2.1 Classification. The dowel rods shall be of the following type and diameter, as specified (see 7.2).

Type I - Rod dowel

Diameter - Inch	(mm)	Inch	(mm)	Inch	(mm)
1/8	(3.2)	7/16	(11.1)	1	(25.4)
3/16	(4.8)	1/2	(12.7)	1-1/8	(28.5)
1/4	(6.3)	5/8	(15.8)	1-1/4	(31.7)
5/16	(7.9)	3/4	(19.0)	1-1/2	(38.1)
3/8	(9.5)	7/8	(22.2)		

Type II - Deleted

3. SALIENT CHARACTERISTICS

3.1 Material. Unless otherwise specified (see 7.2), the wood species shall be at the option of the manufacturer and of the type accepted within industry for the manufacture of this product.

3.2 Crook/Bow. The dowel rod shall have no crook exceeding 3/8 inch (9.5 mm) and no bow exceeding 3/4 inch (19.0 mm) in 36 inches (914.4 mm).

a. Crook is any discreet departure of the dowel axis from a straight line extending through the center of the dowel ends, within the dowel length.

b. Bow is any continuous departure of the dowel axis from a straight line extending through the center of the dowel ends, in the overall dowel length.

3.3 Cross grain. Slope of grain shall not exceed 1 inch (25.4 mm) in 12 inches (304.8 mm).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Branch (7FXEE), 819 Taylor St., Fort Worth, TX 76102

FSC 5510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

3.4 Dimensions. Unless otherwise specified, the rod dowel length shall be 36 inches (914.4 mm), plus 1/2 inch (12.7 mm), minus 1/16 inch (1.6 mm). The tolerance on the diameter shall be ± 3 percent.

3.5 Workmanship. The rod dowels shall be smoothly finished and free of rough surfaces, splinters, or splits.

3.6 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated in parentheses are for information purposes only.

3.7 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified and all other requirements of this document are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING

6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Part Identification Number (PIN). Rod dowels conforming to this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the CID number, type, and diameter. An example of the part number configuration is shown below. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

AA19751A Example: (AA19751A) = Type I, 1/8 inch diameter

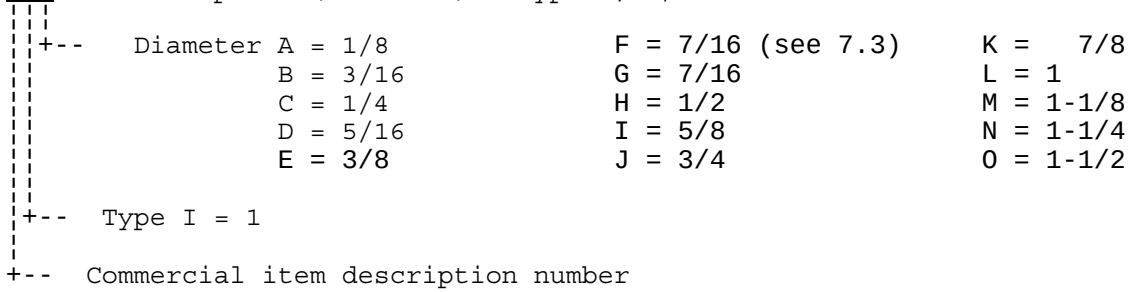

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.

7.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. Type, diameter, and wood species required.
c. Preservation, packing, and marking desired.

7.3 National Stock Numbers (NSNs): The following is a list of NSNs assigned which correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

NSN	Diameter (inch)	Part number
5510-00-223-8254	1/8	AA19751A
5510-00-223-7182	3/16	AA19751B
5510-00-240-0067	1/4	AA19751C
5510-00-223-0952	5/16	AA19751D
5510-00-240-0068	3/8	AA19751E
5510-00-270-6246	7/16 (2-3/8 inch length (60.3 mm))	AA19751F
5510-00-497-5463	7/16	AA19751G
5510-00-240-0069	1/2	AA19751H
5510-00-240-0070	5/8	AA19751I
5510-00-240-0071	3/4	AA19751J
5510-00-978-6858	7/8	AA19751K
5510-00-223-0953	1	AA19751L
5510-00-223-0954	1-1/8	AA19751M
5510-00-223-0955	1-1/4	AA19751N
5510-00-223-0956	1-1/2	AA19751O

MILITARY INTERESTS:

Custodian:
AF - 99

Review Activity:
AF - 84

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:18Z
Check the source to verify that this is the current version before use.