FED SUP CLASS
5935

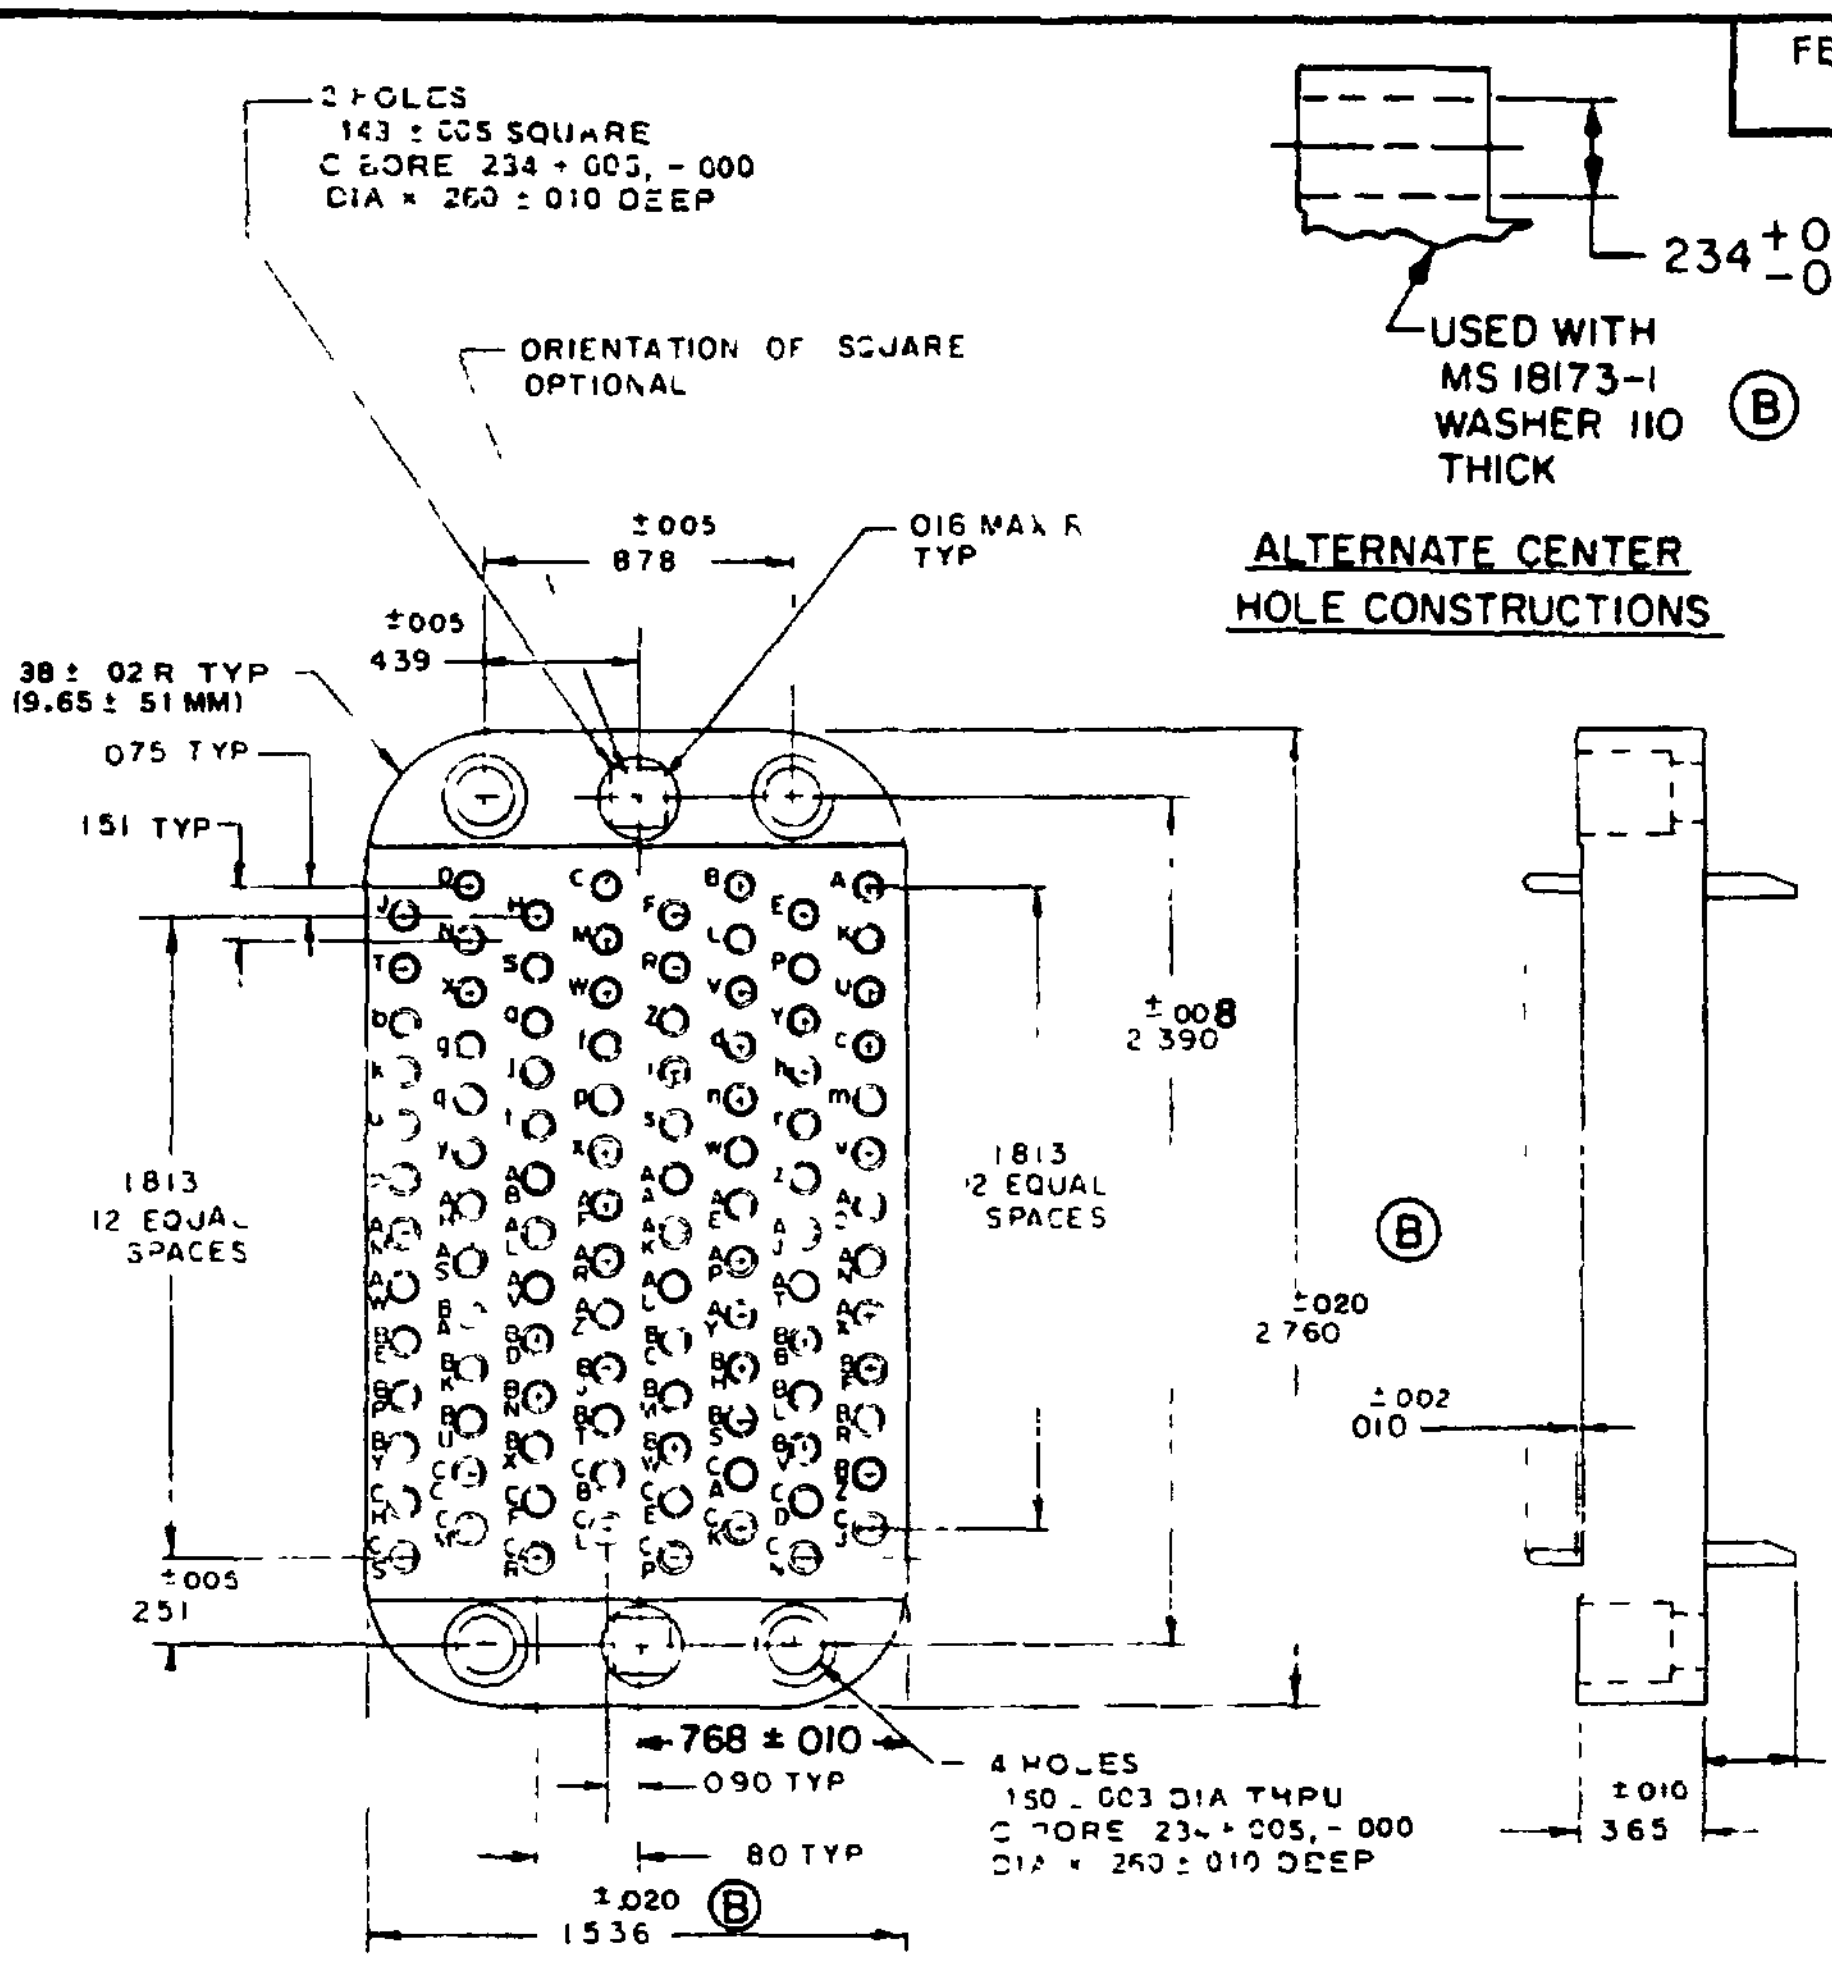

INCHES	MM
.002	.05
.003	.08
.005	.13
.008	.20
.010	.25
.016	.41
.020	.51
.075	1.91
.090	2.29
.110	2.79
.143	3.63
.150	3.81
.151	3.84
.180	4.57
.234	5.94
.250	6.35
.251	6.38
.260	6.60
.365	9.27
.38	9.65
.439	11.15
.768	19.51
.878	22.30
1.536	39.01
2.390	60.71
2.760	70.10

MS Part No. MS18263-1 - Suitable for all applications
MS Part No. MS18263-2 - For long jackscrews and hood only (thru hole alternate construction)

DESIGN STANDARD FOR USE WITH MIL-C-28748/5.

NOTES

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005 (.13 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Tolerance between contact hole and insert centerline shall be ±.004 (.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (.15 mm).
5. Contact identification letters shall be located on insert as shown. The contact identification shall appear on the front and rear of each insert.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.

Ⓑ DENOTES CHANGE

APPROVED 14 July 1967 REVISED Ⓐ 20 May 1970 Ⓑ 23 June 1972

P A Navy - EC Other Cust AF-80 Army - EL	International interest	TITLE CONNECTOR, RECTANGULAR, ELECTRICAL, RACK AND PANEL 104, SIZE 20 SOLDER PIN CONTACTS	MILITARY STANDARD MS18263
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 1 OF 1

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army MI, AT; Navy AS, SH; Air Force 11

User activities: Army ME, AM, WC; Navy MC, OS; Air Force

DD FORM 1 Sep 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-1822-77

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:18Z
Check the source to verify that this is the current version before use.