NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
5960

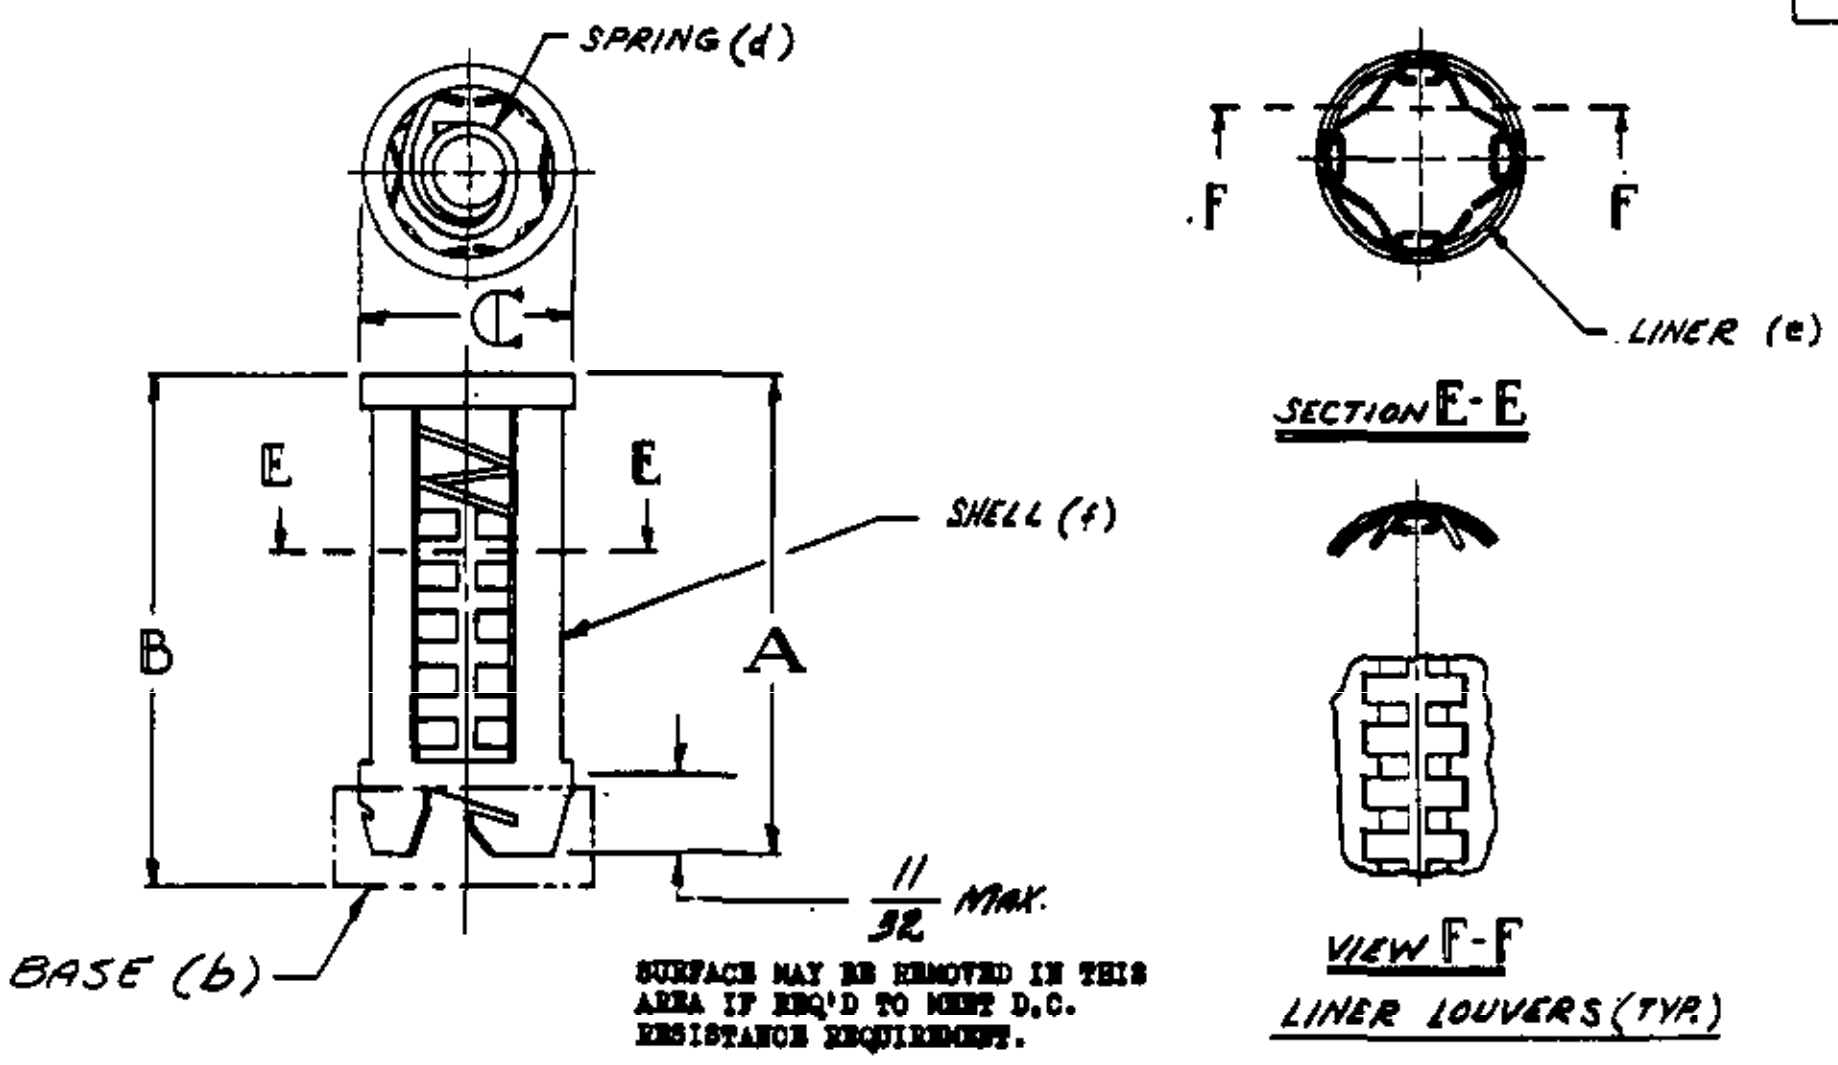

MS PART NO.	SHIELD (a)	A + 0 − 1/32	B MAX	C MAX	WEIGHT GRAMS MAX (c)	TUBE ENVELOPE (REF)		RETAINER (b) (BASE) REF
						STYLE	NOM LENGTH	
MS24232-1	HTS-1	1 11/32	1.530	.917	9	T- 5 1/2	1.1/8	MS24231-1
MS24232-2	HTS-2	1 27/32	2.030	.917	10.7	T- 5 1/2	1 1/2	
MS24232-3	HTS-3	2 11/32	2.530	.917	12.7	T- 5 1/2	2	
MS24232-4	HTS-4	1 11/32	1.530	1.036	10.2	T- 6 1/2	1 1/8	MS24231-2
MS24232-5	HTS-5	1 27/32	2.030	1.036	12	T- 6 1/2	1 9/16	
MS24232-6	HTS-6	2 11/32	2 530	1.036	14	T- 6 1/2	2.	

(a) FORMER IDENTIFICATION

(c) WEIGHT OF SHIELD ASSEMBLY LESS BASE.

(d) SPRING, MATERIAL: BERYLLIUM COPPER, SPEC. QQ=C=530
FINISH: BLACK CAD. PLATE. SPEC. QQ-P-416 CLASS I TYPE II, OPTIONAL FINISH: HENDERLUBE (OR EQUAL)
CONSTRUCTION: THE SPRING SHALL BE HELD IN PLACE BY FRICTION OR BY MECHANICAL MEANS IF THE MAX. DIA. IS SMALLER THAN THE INSIDE DIA. OF THE SHIELD. THE TENSION SHALL BE SUCH AS WILL INSURE MAX. COMPRESSION OF 1/8 INCH OVER SEATED TUBE. THE FORCE REQUIRED TO COMPRESS SPRING TO 3/8 INCH SHALL BE WITHIN 1 1/2 TO 2 1/2 LBS. SPIRALS DO NOT TOUCH EACH OTHER. THE END OF THE COIL SPRING SHALL NOT CONTACT THE ELECTRON TUBE ENVELOPE.

(e) LINER, MATERIAL: BERYLLIUM COPPER SPEC QQ-C-533
FINISH: BLACK CAD. PLATE, SPEC QQ-P-416 CLASS I TYPE II, OPTIONAL FINISH: HENDERLUBE (OR EQUAL)

(f) SHELL, MATERIAL: HIGH HEAT CONDUCTING-NON MAGNETIC TYPE.
FINISH: ANODIZED, DULL BLACK, SPEC. MIL-A-8625, OPTIONAL FINISH: HENDERLUBE (OR EQUAL)

DIM A REFERS TO OVERALL LENGTH OF SHELL. LINER IS NOT FULL LENGTH OF SHELL

DIM B REFERS TO OVERALL LENGTH OF SHIELD ASSEMBLY SEATED IN BASE.
DIM C REFERS TO MAX. O.D. OF SHELL
INSTALLATION FORCE SHALL NOT EXCEED 20 LBS TO INSTALL SHIELD OVER TUBE. NO TOOL REQUIRED FOR APPLICATION OR REMOVAL OF SHIELD FROM TUBE AND MOUNTING BASE. TOP END OF SHIELD OPEN.
ENGAGING TORQUE: 20 POUND INCHES MAX.

CANCELED AFTER 17 JULY 1967
Ⓓ USE MIL-S-24251/5

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005

APPROVED 29-JAN-58 REVISED Ⓐ 11 Mar 60 Ⓑ 3 MAY 61 Ⓒ 8 Feb 62 Ⓓ 17 JULY 1967

CUSTODIANS Air Force-11	OTHER INT. A - N - AF -	MILITARY STANDARD SHIELD-ELECTRON TUBE-HEAT DISSIPATING (7 AND 9 PIN MINIATURE)	MS 24232 (USAF)
PROCUREMENT SPECIFICATION MIL-S-9372		SUPERSEDES: MS 24213 AND MS 24214	SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

U.S. GOVERNMENT PRINTING OFFICE: 1967-301-510/611

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.