
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
4730

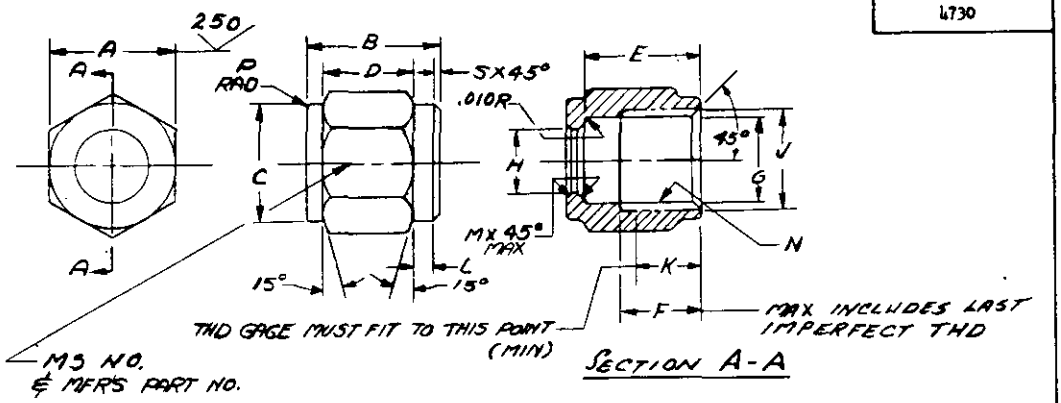


THREADS PER MIL-S-7742

| MS PART NO. | A | B | C | D | E | F | G | H | J | K | L | M |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| MS24592-3 | .441-.434 | 19/32 | .437-.427 | 3/8 | .506 | .407 | .339-.334 | .245-.242 | 3/8 | .282 | 9/64 | .005 |
| MS24592-4 | .566-.559 | 41/64 | .562-.552 | 13/32 | .532 | .450 | .394-.388 | .308-.305 | 7/16 | .300 | 1/8 | .005 |
| MS24592-5 | .628-.621 | 43/64 | .625-.615 | 31/64 | .579 | .481 | .457-.451 | .377-.374 | 1/2 | .331 | 1/8 | .005 |
| MS24592-6 | .691-.684 | 23/32 | .687-.677 | 1/2 | .603 | .500 | .514-.508 | .443-.440 | 9/16 | .333 | 5/32 | .010 |
| MS24592-8 | .878-.871 | 27/32 | .875-.865 | 19/32 | .723 | .563 | .694-.688 | .573-.570 | 3/4 | .375 | 5/32 | .010 |
| MS24592-10 | 1.003-.996 | 31/32 | 1.000-.990 | 11/16 | .817 | .675 | .810-.804 | .701-.698 | 7/8 | .461 | 11/64 | .010 |
| MS24592-12 | 1.253-1.246 | 1-1/64 | 1.250-1.240 | 3/4 | .868 | .719 | .986-.979 | .837-.834 | 1-1/16 | .469 | 1/8 | .010 |
| MS24592-16 | 1.503-1.496 | 1-1/8 | 1.500-1.490 | 49/64 | .962 | .813 | 1.236-1.229 | 1.992-1.089 | 1-5/16 | .563 | 7/32 | .010 |
| MS24592-20 | 2.016-1.984 | 1-7/32 | 2.000-1.990 | 49/64 | 1.017 | .813 | 1.548-1.541 | 1.350-1.347 | 1-5/8 | .563 | 5/16 | .010 |
| MS24592-24 | 2.270-2.230 | 1-13/32 | 2.250-2.240 | 7/8 | 1.170 | .911 | 1.798-1.791 | 1.622-1.617 | 1-7/8 | .661 | 23/64 | .010 |
| MS24592-32 | 2.895-2.855 | 1-47/64 | 2.875-2.865 | 1-5/64 | 1.462 | 1.094 | 2.423-2.416 | 2.172-2.167 | 2-1/2 | .844 | 7/16 | .015 |

| MS PART NO. | N | P | S |
|---|---|---|---|
| MS24592-3 | 3/8-24 UNF-3B THD | 1/32 | .010 |
| MS24592-4 | 7/16-20 UNF-3B THD | 1/32 | .010 |
| MS24592-5 | 1/2-20 UNF-3B THD | 1/32 | .010 |
| MS24592-6 | 9/16-18 UNF-3B THD | 3/64 | .010 |
| MS24592-8 | 3/4-16 UNF-3B THD | 3/64 | .010 |
| MS24592-10 | 7/8-14 UNF-3B THD | 3/64 | .010 |
| MS24592-12 | 1-1/16-12 12UN-3B THD | 1/16 | .010 |
| MS24592-16 | 1-5/16-12 12UN-3B THD | 5/64 | .010 |
| MS24592-20 | 1-5/8-12 12UN-3B THD | 3/32 | .010 |
| MS24592-24 | 1-7/8-12 12UN-3B THD | 3/32 | .010 |
| MS24592-32 | 2-1/2-12 12UN-3B THD | 7/32 | .015 |

MS24592-3, -4, -5, and -6 SHALL BE STEEL.
MS24592-8 AND ABOVE MAY BE ALUMINUM ALLOY OR STEEL.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS THAT MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ±1°, DECIMALS ±.005, FRACTIONS ±1/64.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS PART IS A COMPONENT OF MS24587.

SURFACE ROUGHNESS PER MIL-STD-10

Ⓐ CANCELLED - NO SUPERSEDING STANDARD

APPROVED 29 March 1960 REVISED Ⓐ 31 July 1978

| | | |
|---|---|---|
| P.A. AIR FORCE<br>Other Cust | TITLE<br>NUT, TUBE COUPLING - HOSE TO TUBE<br>REUSABLE, HYDRAULIC, PNEUMATIC,<br>FUEL AND OIL LINES | MILITARY STANDARD<br>MS 24592<br>(USAF) |
| PROCUREMENT SPECIFICATION<br>MIL-A-5070 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 SEP 87 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:58Z
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1978—603-012/4765

GPO 820867